


1. PART NUMBER: CFM-33370253

2. SPECIFICATION:

| NO | ITEMS | SPECIFICATIONS | |
|----|---|----------------------|-------------|
| 1 | Center Frequency (Fo) | 3337.5 MHz | |
| 2 | Pass Bandwidth (BW) | 25 MHz (Fo±12.5 MHz) | |
| 3 | Insertion Loss in BW | 3.0 dB max. | |
| 4 | Ripple in BW | 0.5 dB max. | |
| 5 | V.S.W.R in BW | 1.5 | |
| 6 | Attenuation (referenced to midband insertion loss) | At 0 - 2500 MHz | 35 dBc min. |
| | | At 2841 – 2866 MHz | 40 dBc min. |
| | | At 3083 – 3108 MHz | 35 dBc min. |
| | | At 3204 – 3229 MHz | 30 dBc min. |
| | | At 3425 – 3450 MHz | 20 dBc min. |
| | | At 3255 – 3280 MHz | 15 dBc min. |
| | | At 4000 MHz | 35 dBc min. |
| | | | |
| 7 | Impedance | 50 Ohms | |

3. DIMENSIONS

TOLERANCE : ± 0.3 mm

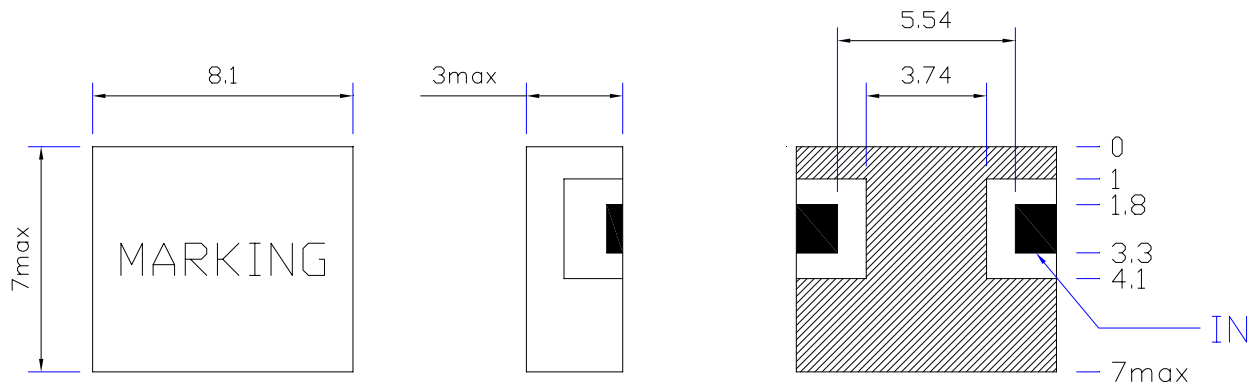

IN&OUT PORT
 GROUND