


# BANDPASS FILTER

**Fo:** 10.70 MHz  
**IMPEDANCE :** 450 ohm // 4 pF IN/OUT  
**INSERTION LOSS:** 5 dB MAX  
**RIPPLE:** 0.25 dB MAX  
**3dB BANDWIDTH:** 2.3 KHz ±10%  
**60dB BANDWIDTH:** 5 KHz MAX  
**OPERATING TEMPERATURE :** 0°C to +55°C

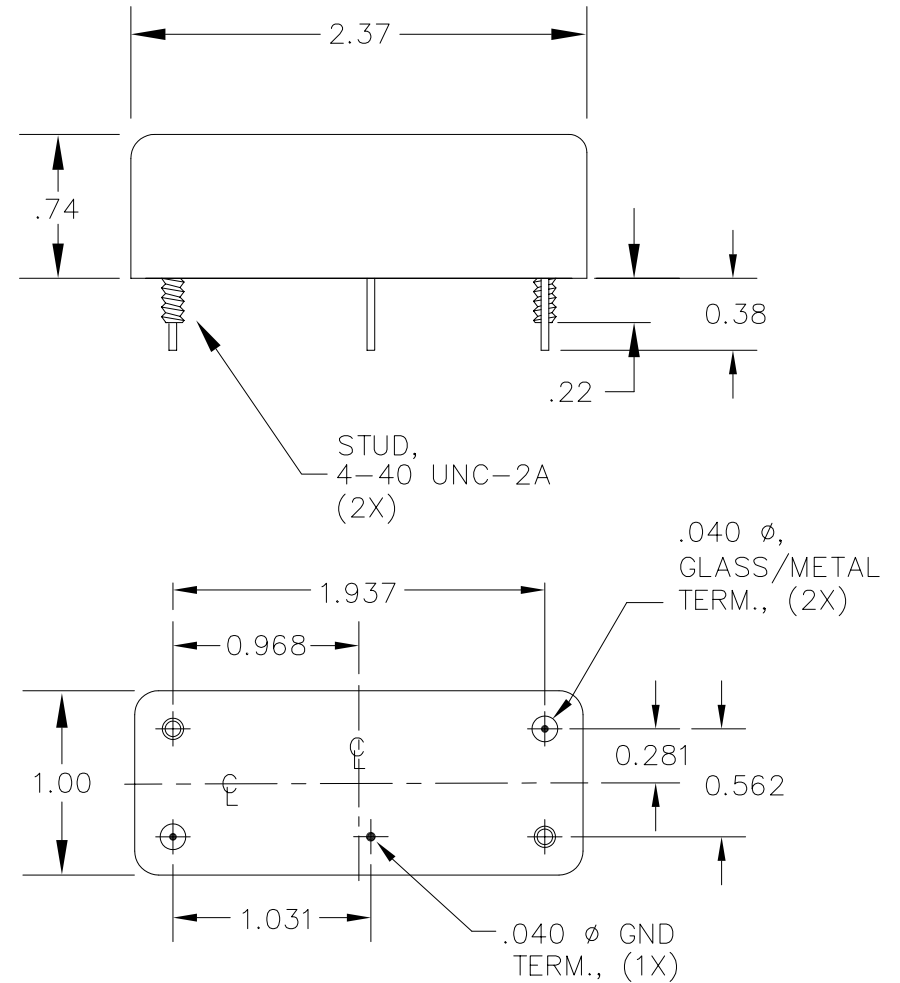

## FN-105W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 1/28/03