
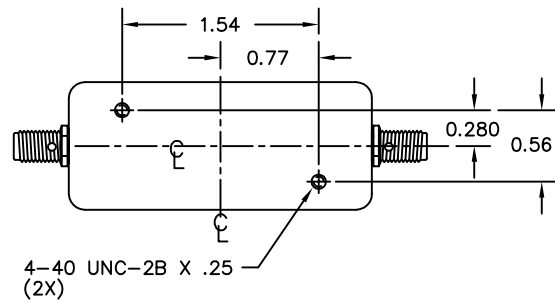


FN-1136-1W

BANDSTOP FILTER

Fo: 20.0 MHz
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 4 dB MAX
 RIPPLE: 1 dB MAX
 3dB BANDWIDTH: ± 3 KHz MAX
 PASSBAND: ±4 MHz AT 3 dB MAX
 40dB BANDWIDTH: ± 250 Hz MIN
 OPERATING TEMPERATURE : 0°C to +50°C

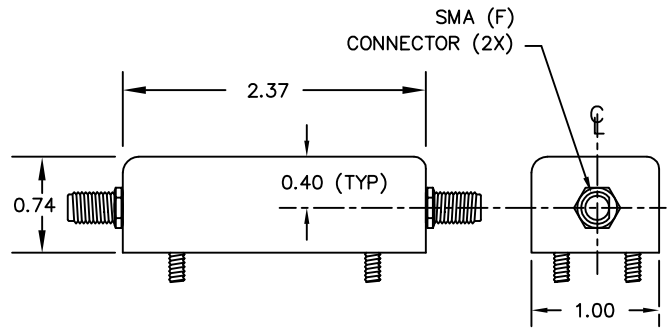

FN-1136-1WF


FN-1136-1W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

INITIAL 5/21/15

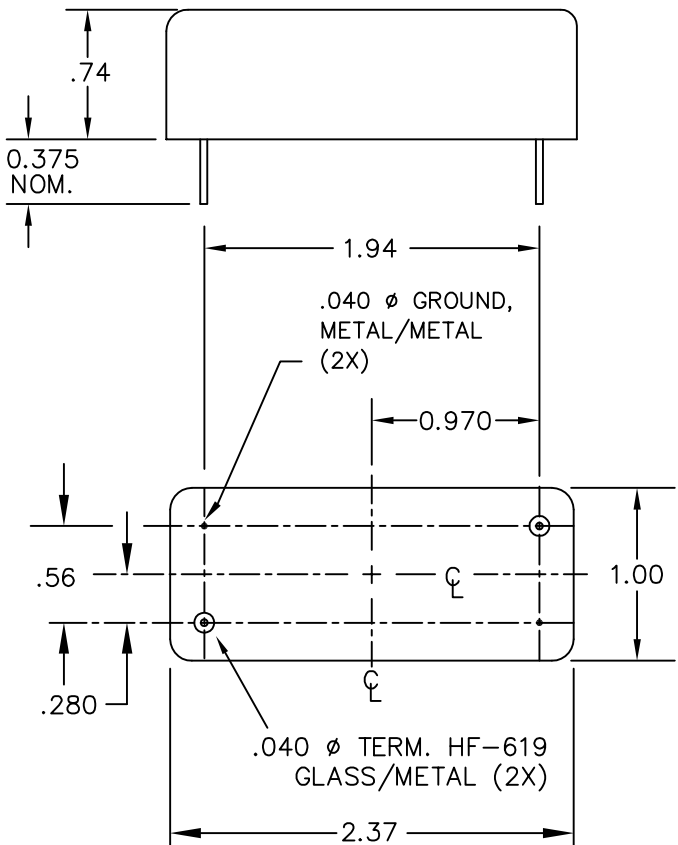

FN-1136-1WA