


BANDPASS FILTER

Fo: 60.0 MHz
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 6.0 dB MAX
 RIPPLE: 1.0 dB MAX
 3dB BANDWIDTH: 100 KHz MIN
 40dB BANDWIDTH: 600 KHz MAX
 ULTIMATE ATTENUATION: 60 dB MIN
 SPURIOUS ATTENUATION: 40 dB MIN
 GROUP DELAY (±25 KHz): 1.0 uSEC MAX VARIATION
 GAUSSIAN TO 6dB RESPONSE




OPERATING TEMPERATURE : 0°C to +55°C

FN-1195W

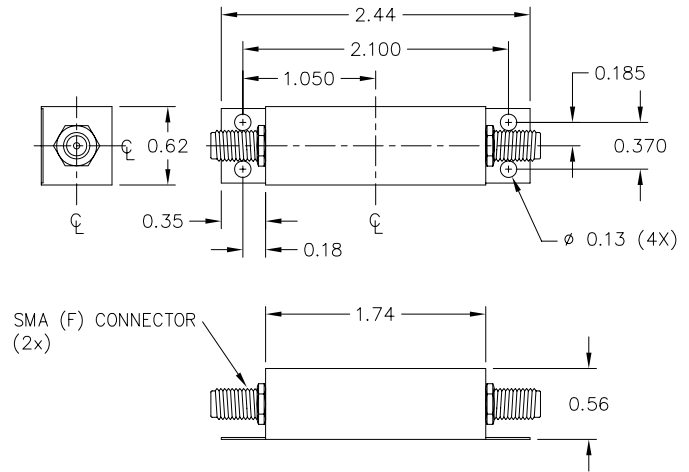

FN-1195WT

FN-1195WS

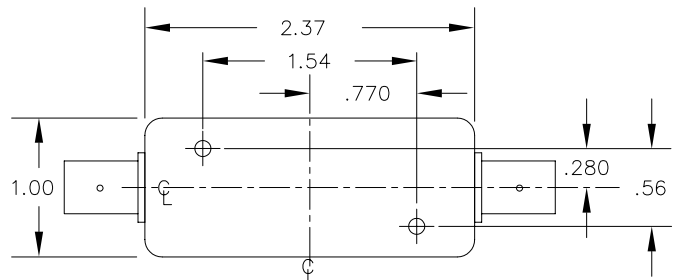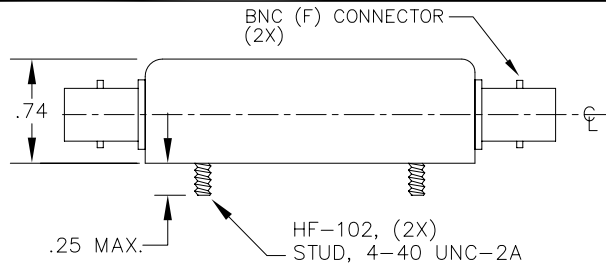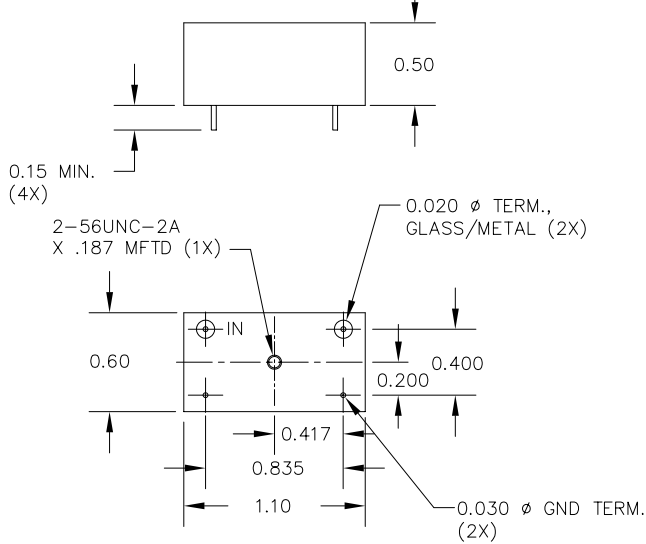

FN-1195WK


FN-1195W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 8/25/03

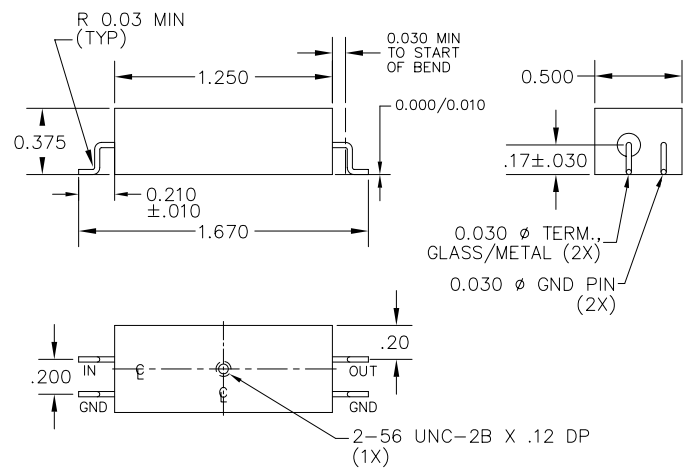

FN-1195WEE