

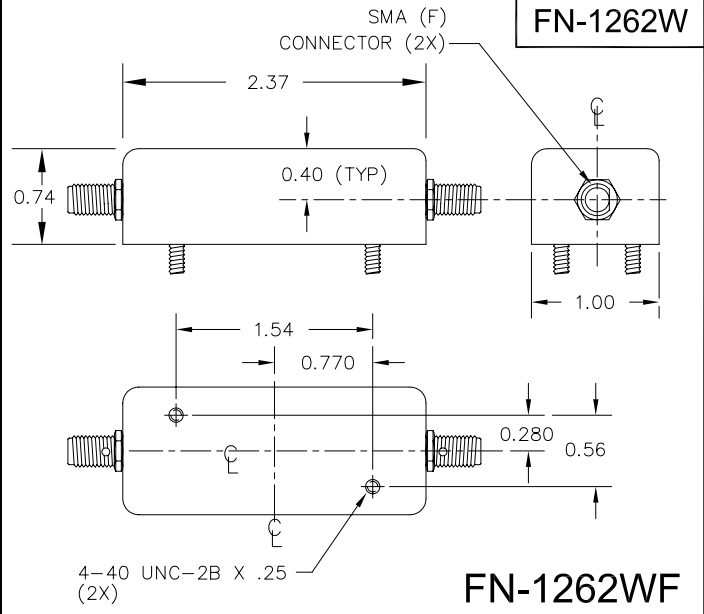


**BANDSTOP FILTER**

**Fc:** 24.0 MHz  
**IMPEDANCE :** 50 OHMS (IN & OUT)  
**INSERTION LOSS:**  
 6 dB MAX FROM 24.1 TO 25.3 MHz  
**ATTENUATION @ 24.07 MHz:** 6 dB MAX  
**RIPPLE:**  
 1.0 dB MAX FROM 24.1 TO 25.3 MHz  
**NOTCH BANDWIDTH:** Fc ± 10 KHz  
**NOTCH ATTENUATION:** 40 dB MIN  
**SPURIOUS REGION:** 24.15 TO 24.55 MHz  
**SPURIOUS AMPLITUDE:** 3 dB MAX  
**OPERATING TEMPERATURE :** +25°C

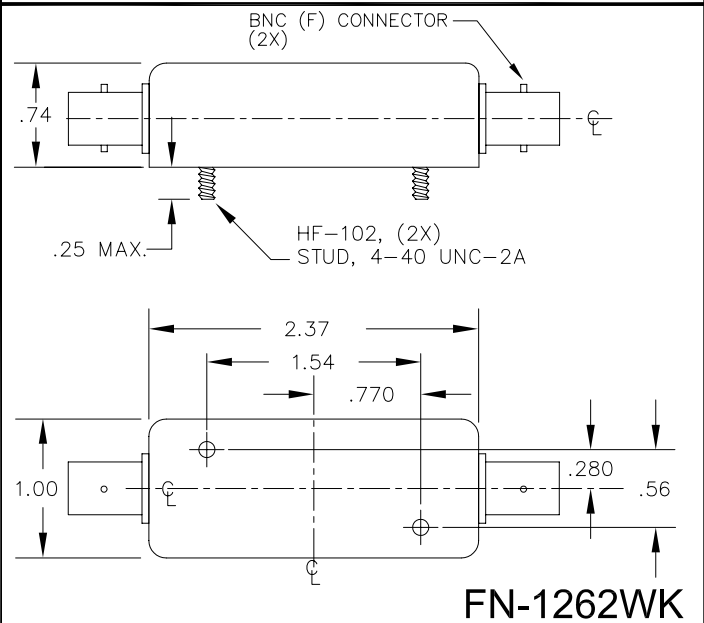

**FN-1262W**

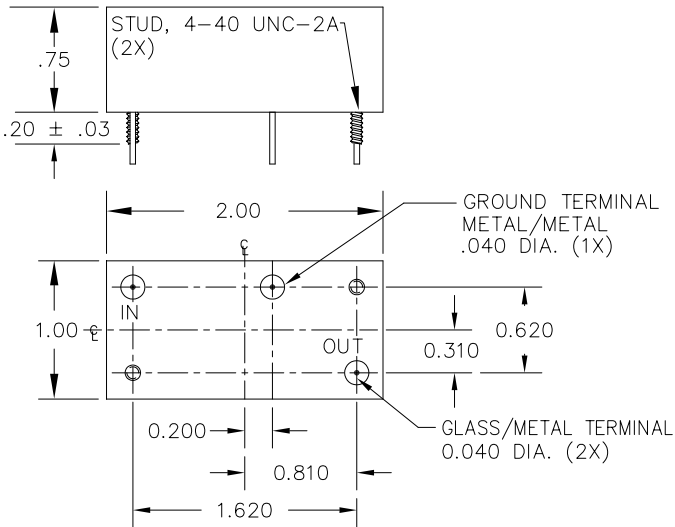

**FN-1262WK**

**FN-1262W DRAWING SUMMARY**


**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 5/4/04

REF LEVEL /DIV OFFSET 0.000Hz  
 -3.124dB 10.000dB MAG (S21) -0.044dB

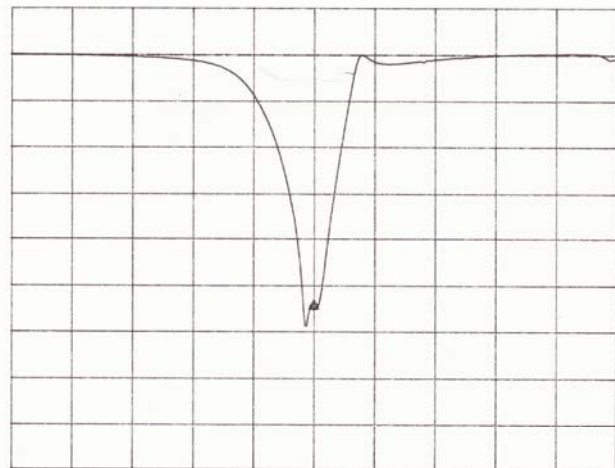

CENTER 24 000 000.000Hz SPAN 500 000.000Hz  
 AMPTD 15.0dBm