



BANDPASS FILTER


Fo: 109.0 MHz
 3dB BANDWIDTH: 30 KHz MIN
 40 dB BANDWIDTH: 150 KHz MAX
 60 dB BANDWIDTH: 300 KHz MAX
 INSERTION LOSS: 4.5 dB MAX
 IMPEDANCE: 50 OHMS (IN & OUT)
 RIPPLE: 0.5 dB MAX
 GROUP DELAY: 6 uSEC MAX Fo ± 10 KHz
 VARATION 12 uSEC MAX Fo ± 15 KHz
 OPERATING TEMPERATURE: -40°C to +70°C

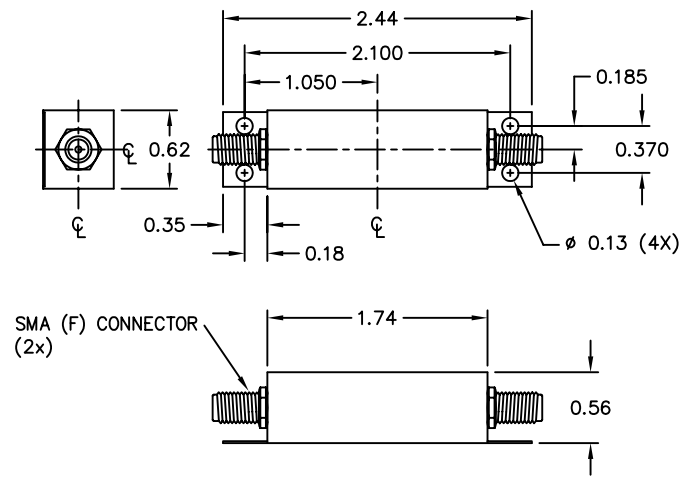

FN-1368WT

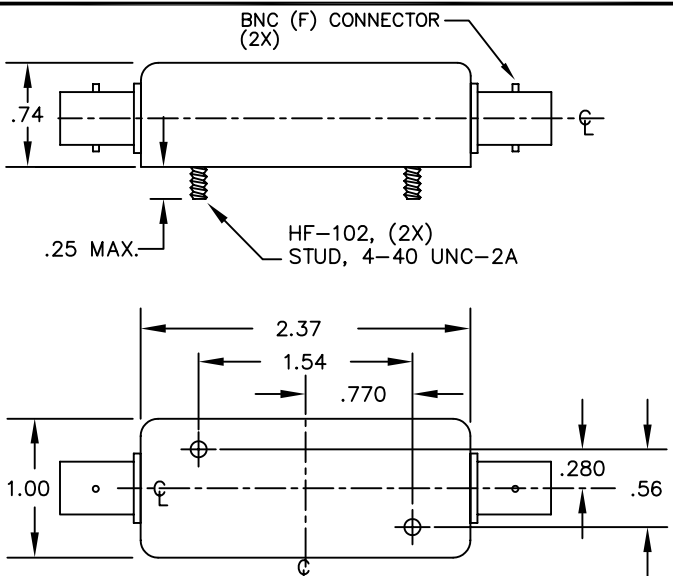

FN-1368WK

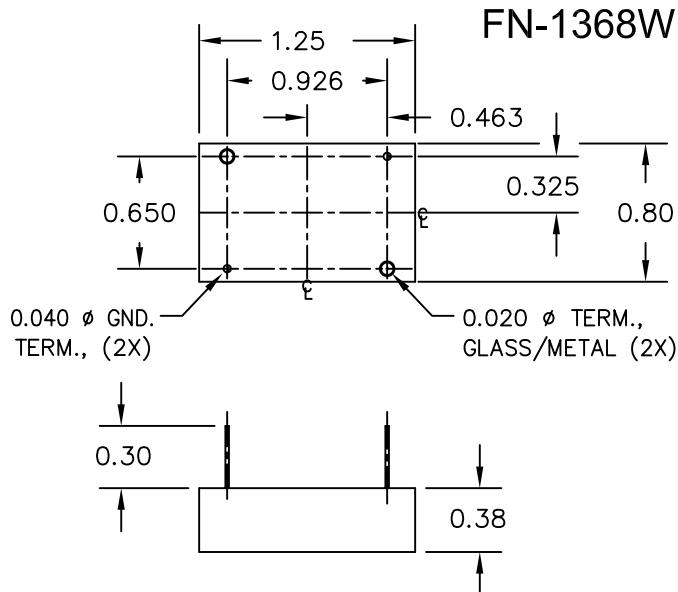

FN-1368W


FN-1368W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 05/29/12 ECO 4379

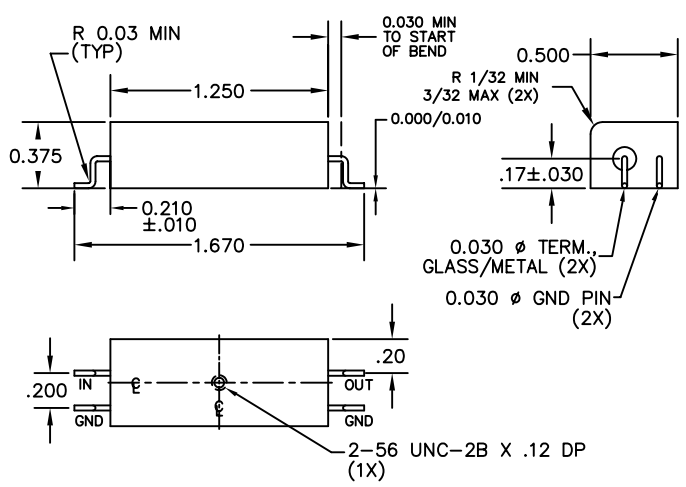

FN-1368WEE