
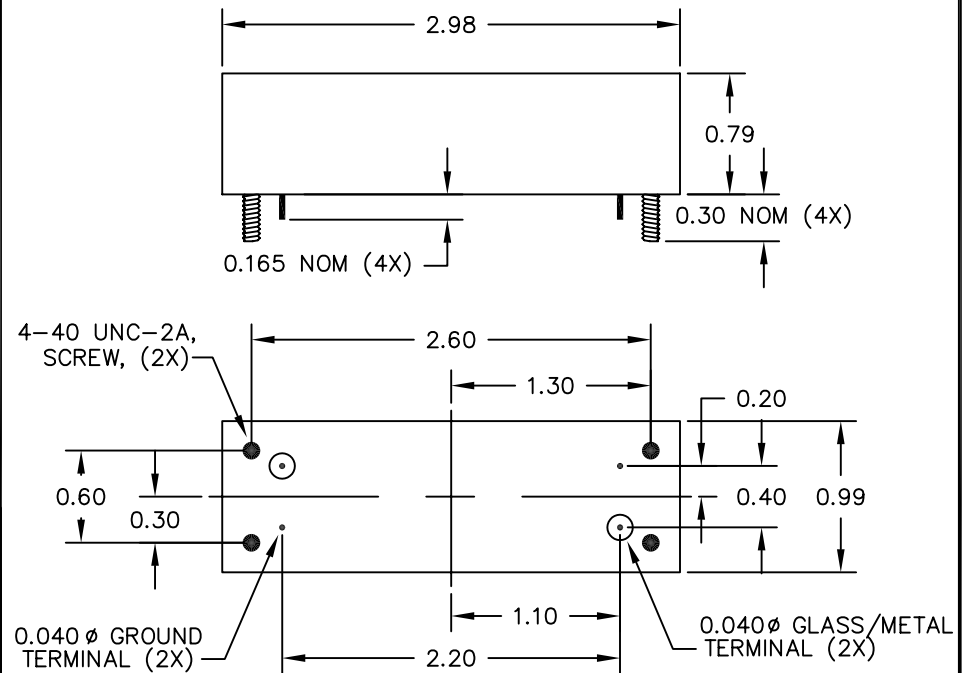
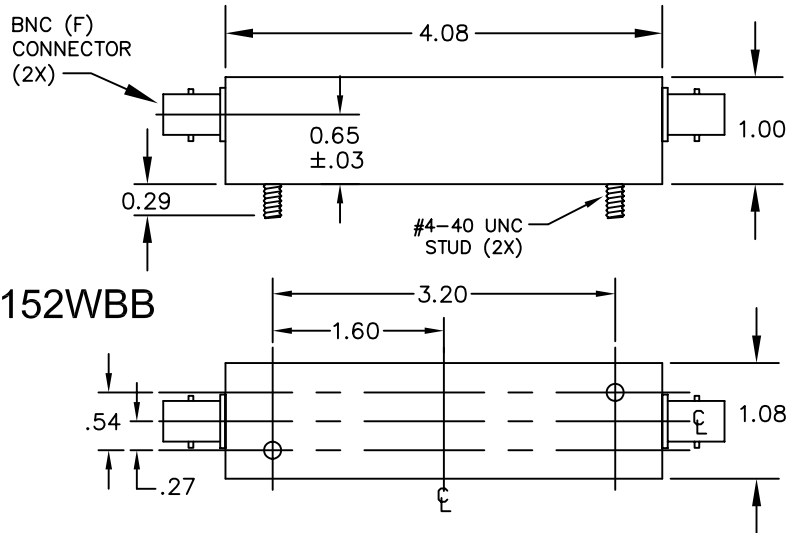


# BANDPASS FILTER

**Fc:** 500 KHz  
**IMPEDANCE :** 200 OHMS (IN & OUT)  
**INSERTION LOSS :** 3.0 dB MAX  
**RIPPLE :** 0.5 dB MAX  
**1 dB BANDWIDTH :** 85 Hz MIN  
**60dB BANDWIDTH :** 550 Hz MAX  
**OPERATING TEMPERATURE :** 0°C TO +55°C

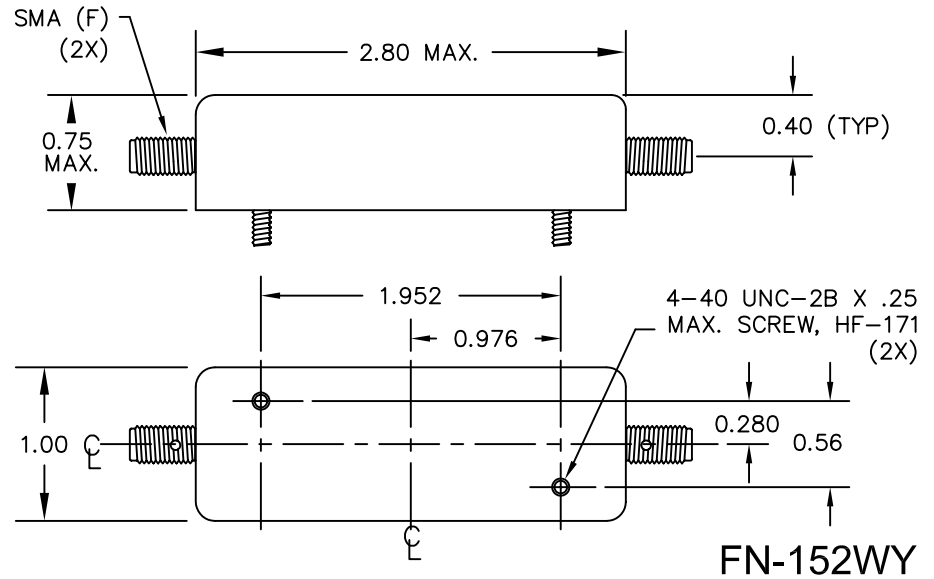

## FN-152W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 8/25/03