


**Fo:** 140.4 MHz  
**3dB BANDWIDTH:** 150 KHz MINIMUM  
**60 dB BANDWIDTH:** 425 KHz MAXIMUM  
**INSERTION LOSS:** 5 dB MAX  
**IMPEDANCE:** 50 OHMS (IN & OUT)  
**RIPPLE :** ±.5 dB MAXIMUM  
**ULTIMATE ATTENUATION:** 60 dB MINIMUM  
**SPURIOUS ATTENUATION:** 50 dB MINIMUM  
**OPERATING TEMPERATURE:** -40°C TO +85°C

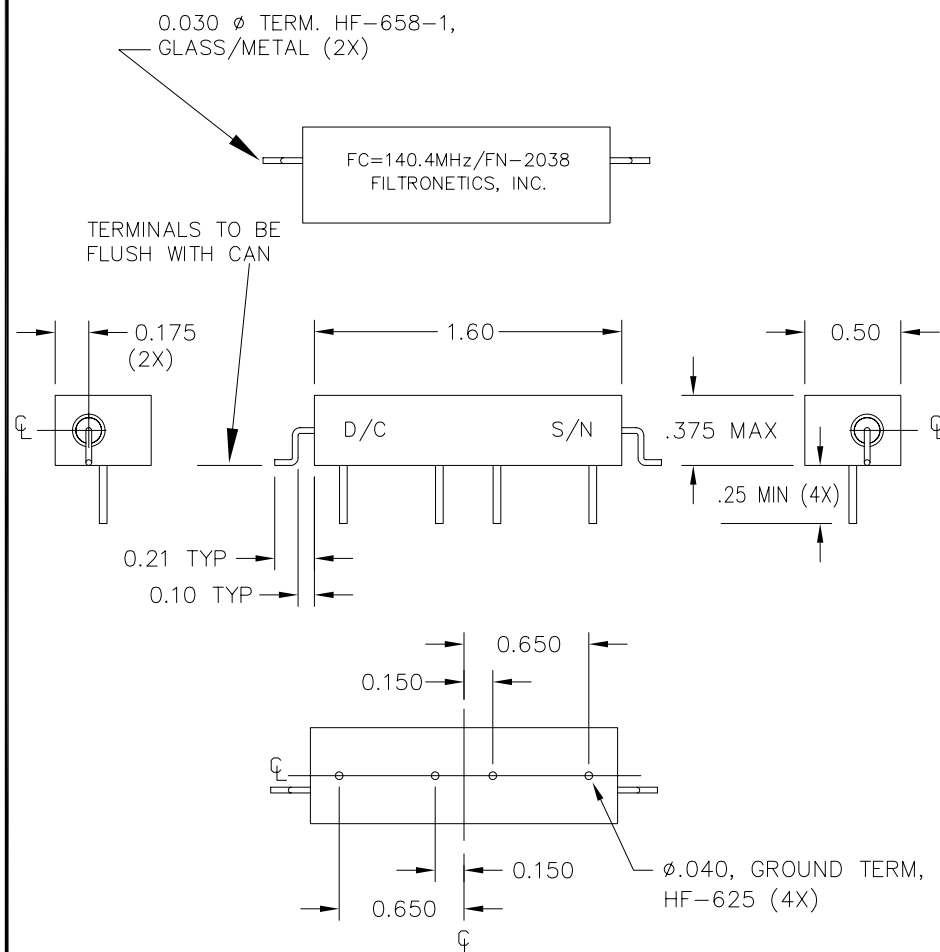

FN-2038 DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 10/9/02