



## BANDPASS FILTER



**Fo:** 70.0 MHz  
**3dB BANDWIDTH:** 3.5 KHz MIN  
**30 dB BANDWIDTH:** 12 KHz MAX  
**60 dB BANDWIDTH:** 25 KHz MAX  
**INSERTION LOSS:** 5.5 dB MAX  
**IMPEDANCE:** 50 OHMS (IN & OUT)  
**RIPPLE:** 0.5 dB MAX  
**SPURIOUS ATTENUATION:** 50 dB TYPICAL  
**ULTIMATE ATTENUATION:** 60dB  
**OPERATING TEMPERATURE:** 0°C to +50°C

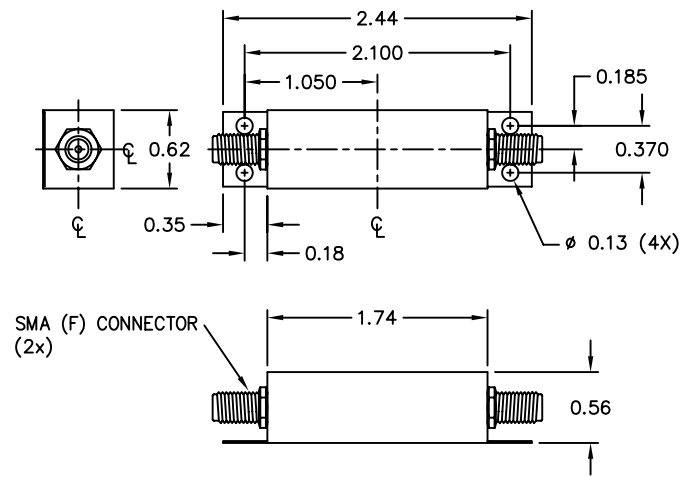

**FN-2063WT**

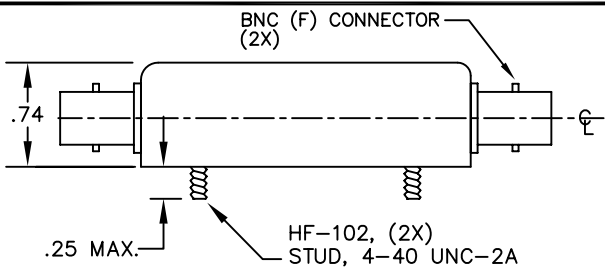

**FN-2063WK**

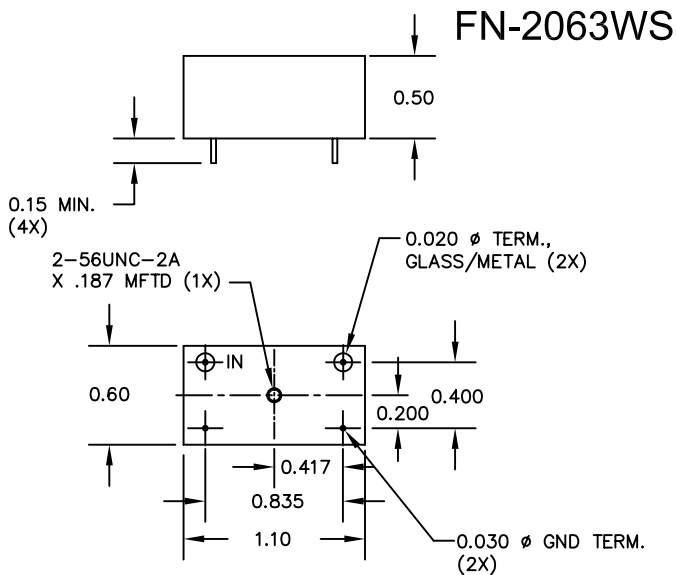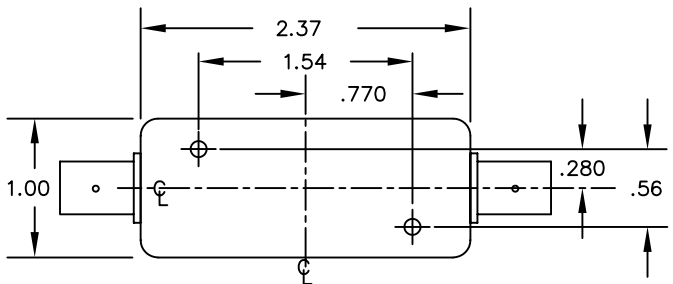


### FN-2063W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 09/07/12

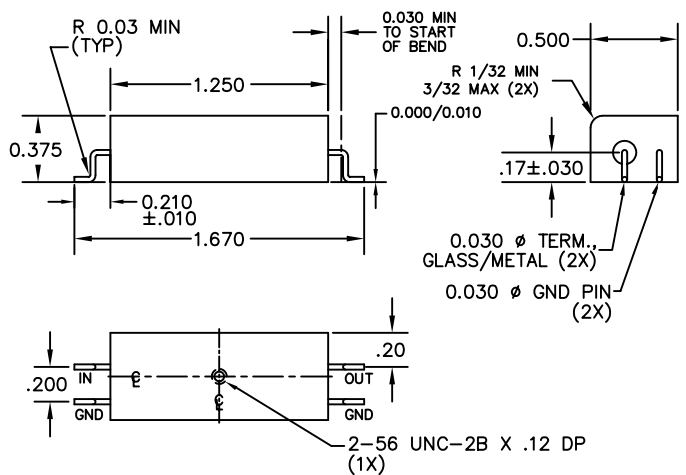

**FN-2063WEE**