
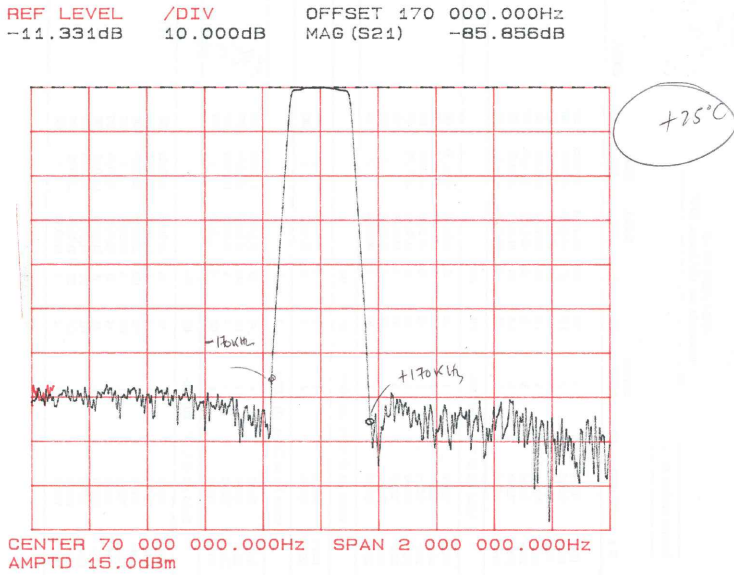
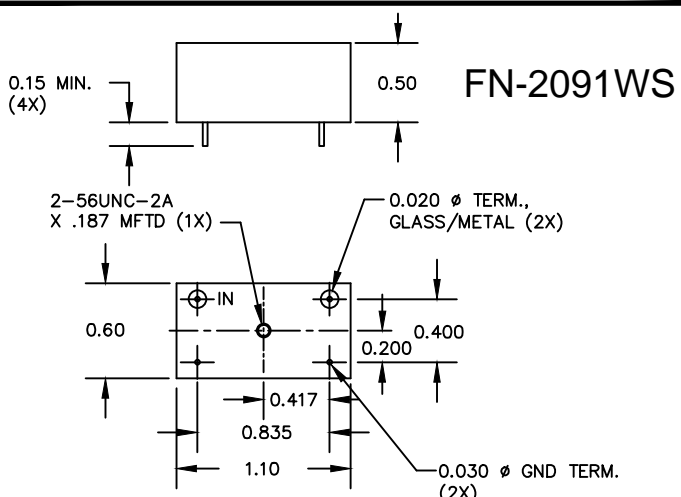
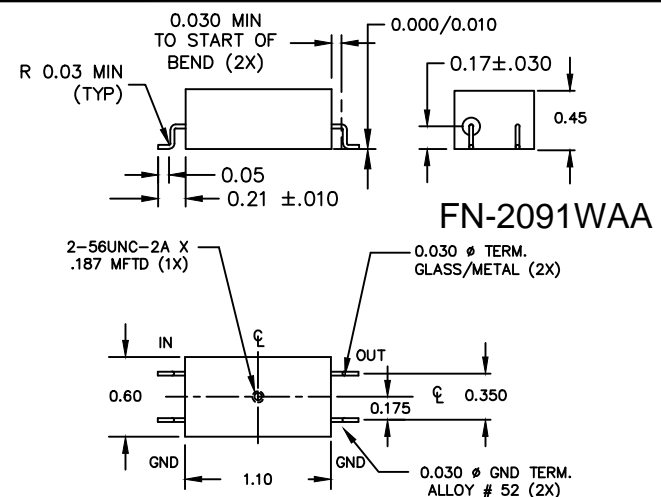
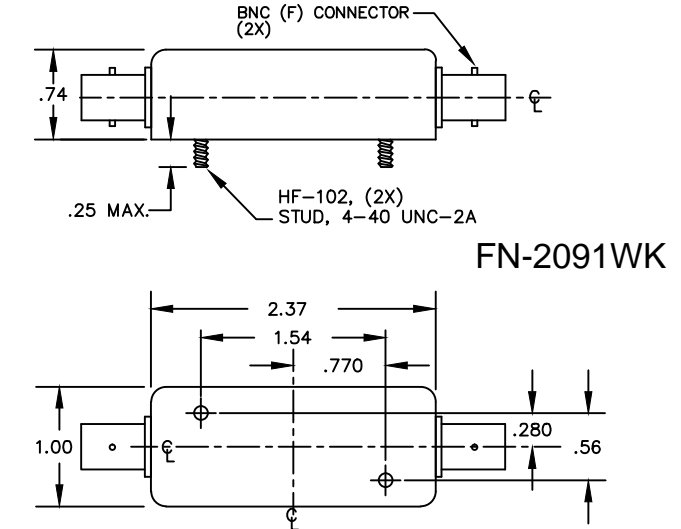


CRYSTAL BANDPASS FILTER

Fo: 70.0 MHz
IMPEDANCE : 50 OHMS IN / OUT
INSERTION LOSS: 11.5 dB MAX
1dB BANDWIDTH: ±35 KHz @ +25°C
1.5dB BANDWIDTH: ±80 KHz MIN
3dB BANDWIDTH: 200 KHz MIN
RIPPLE : 1.0 dB MAX @ +25°C
 2.0 dB MAX, -55°C to +85°C
60dB BANDWIDTH: 360 KHz MAX
SPURIOUS ATTENUATION: 50 dB MIN
ULTIMATE ATTENUATION: 65 dB MIN
OPERATING TEMPERATURE : -55°C to +85°C

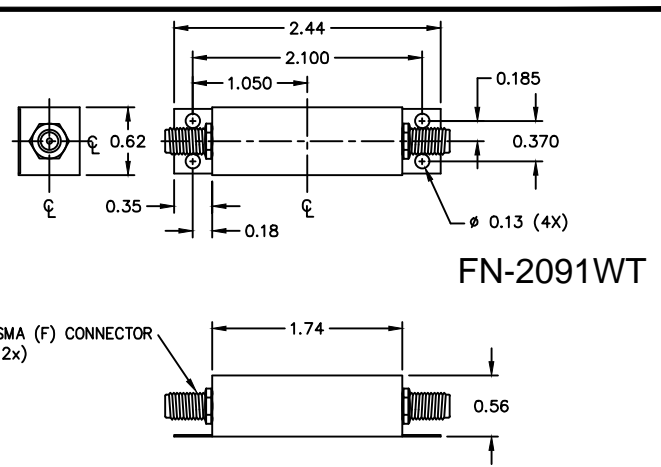

FN-2091W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020

ANGLE = ± 1°

.XXX = ± .010

HOLES = ± .002

REVISED 8/28/2017