




FN-2153W

Fo: 70.0 MHz
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 5.0 dB MAX
 RIPPLE: 1.0 dB MAX
 1dB BANDWIDTH: 30 KHz MIN
 60dB BANDWIDTH: ±200 KHz MAX
 SPURIOUS ATTENUATION: 60 dB MIN
 ULTIMATE: 60 dB
 GROUP DELAY (25 KHz): 1.5 uSEC MAX VARIATION
 OPERATING TEMPERATURE : -54°C to +85°C
 GAUSSIAN RESPONSE SHAPE

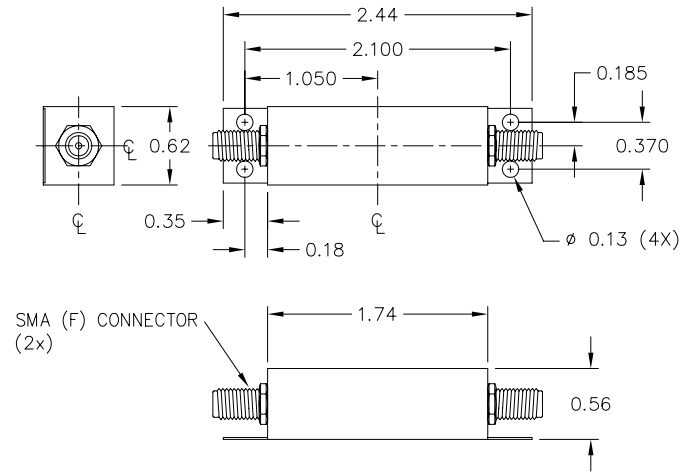

STYLE T

STYLE GG

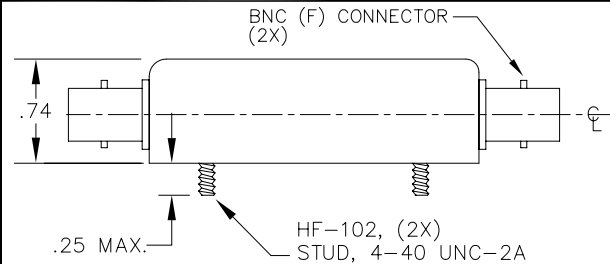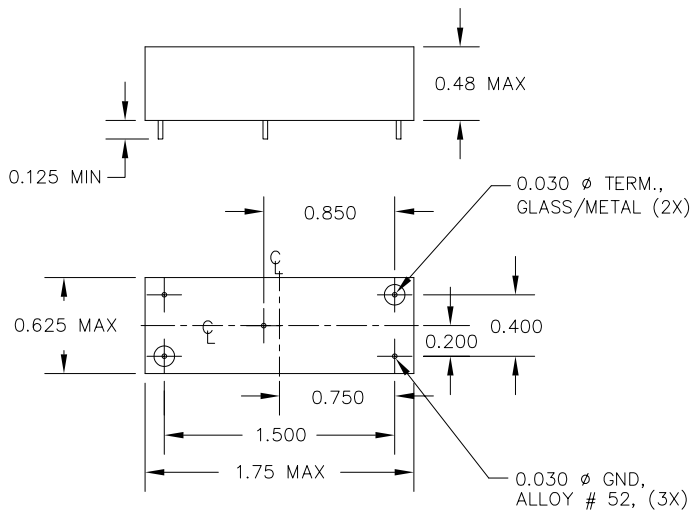

STYLE K

FN-2153W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 12/12/02

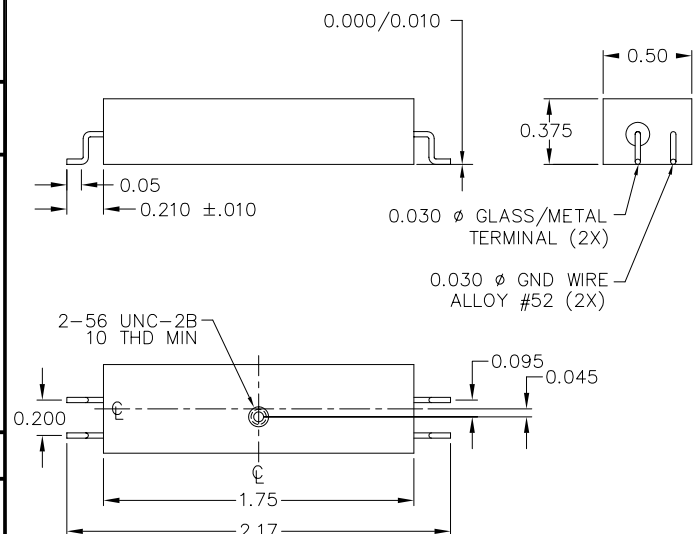

STYLE FF