


BANDPASS FILTER

Fo: 641 MHz
IMPEDANCE : 75 ohm IN/OUT
INSERTION LOSS: 6.0 dB MAX
RIPPLE: 0.1 dB MAX
0.5dB BANDWIDTH: 2 MHz MIN
3.0dB BANDWIDTH: 10 MHz MIN
60dB BANDWIDTH: 90 MHz MAX
STOPBAND: Fo+88 MHz: 80 dB MIN
Fo-88 MHz: 85 dB MIN
OPERATING TEMPERATURE : 0°C to +70°C

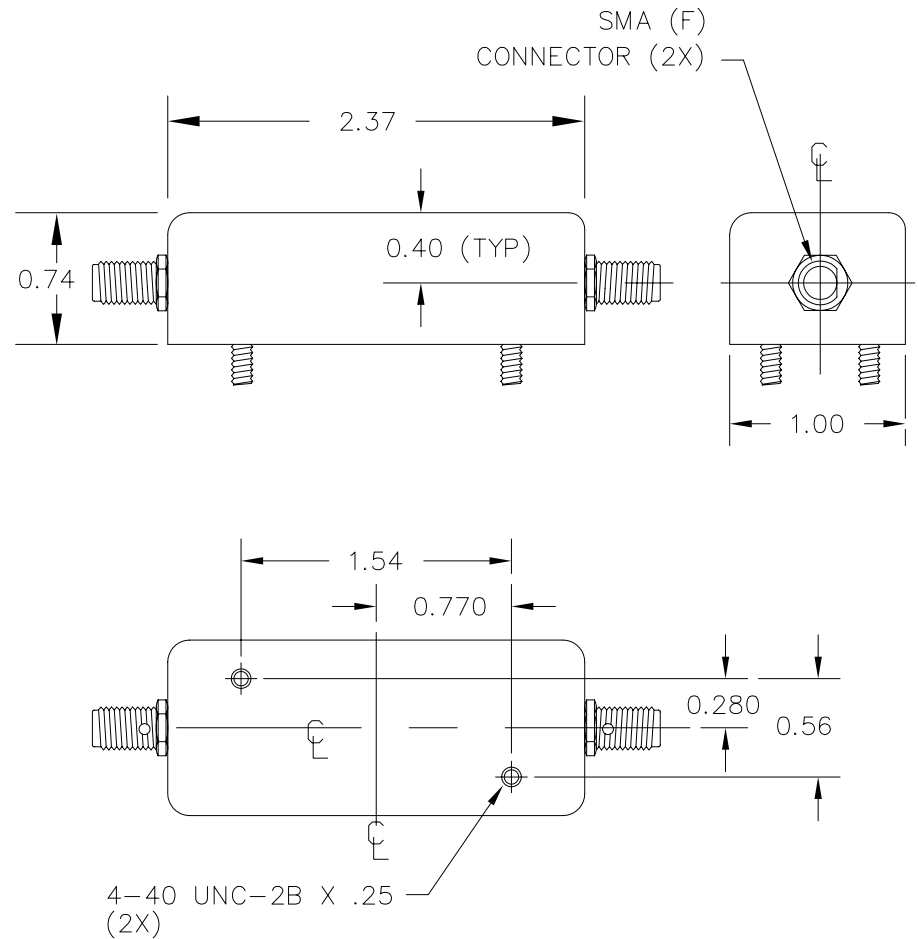

FN-2176W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 11/3/03

(STYLE F)