
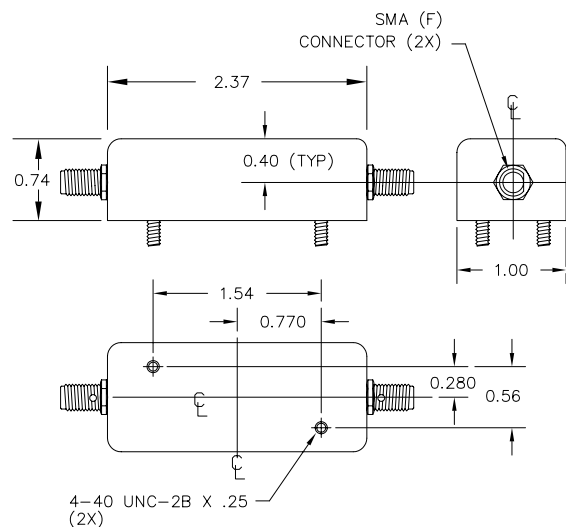



BANDPASS FILTER

Fo: 21.4 MHz
IMPEDANCE : 50 OHM (IN/OUT)
INSERTION LOSS: 7.5 dB MAX
RIPPLE: 0.1 dB MAX
3dB BANDWIDTH: 100 KHz MIN
60dB BANDWIDTH: 400 KHz MAX
GROUP DELAY VARIATION: 2.5 uSEC MAX
 (±40 KHz)
OPERATING TEMPERATURE : 0°C to +71°C

FN-2193W

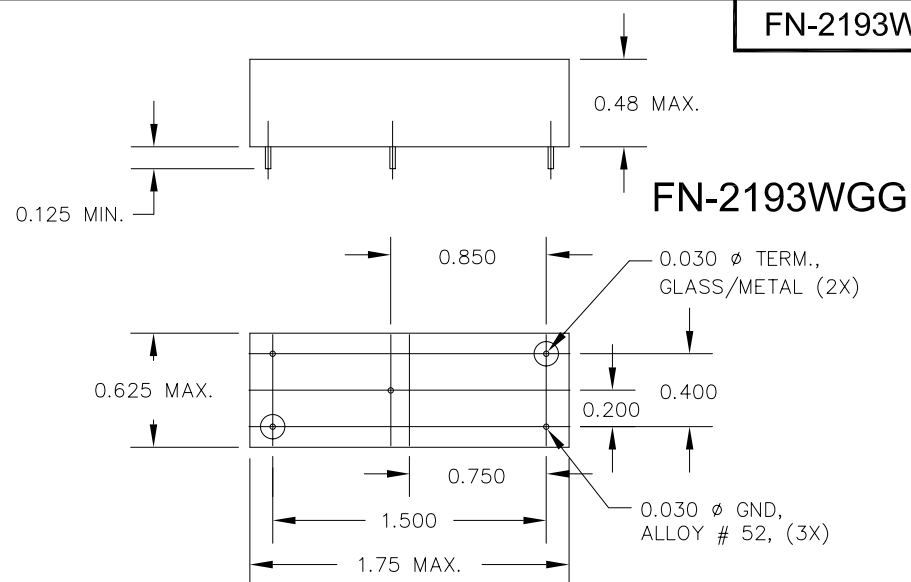

FN-2193WF

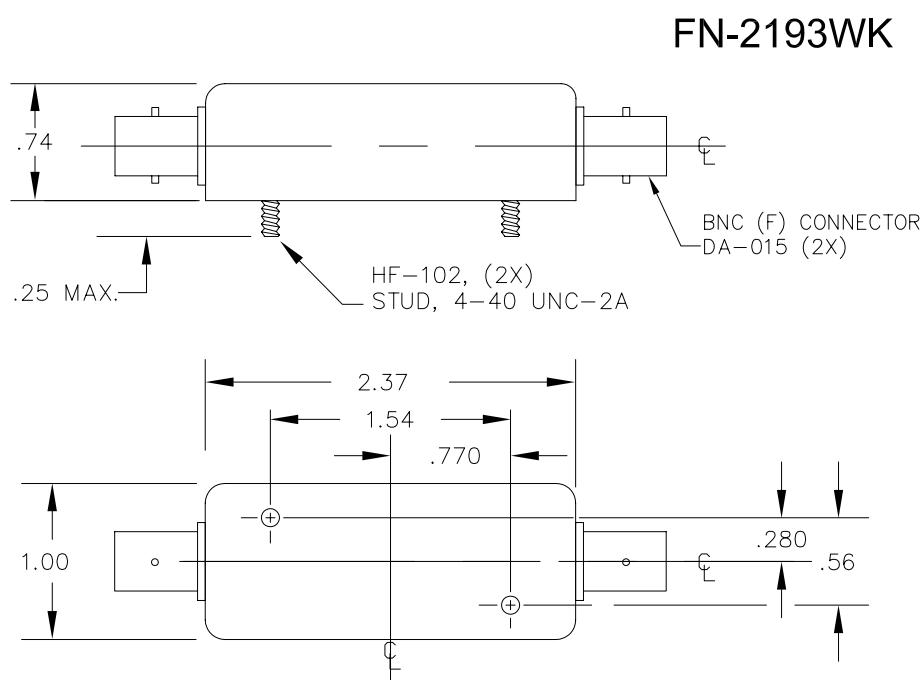

FN-2193WK

FN-2193W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 12/4/03

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.