


BANDPASS FILTER

Fo: 140.0 MHz
IMPEDANCE : 75 OHMS (IN & OUT)
INSERTION LOSS: 7.0 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 500 KHz MIN
50dB BANDWIDTH: 2.0 MHz MAX
OPERATING TEMPERATURE : +20°C to +30°C

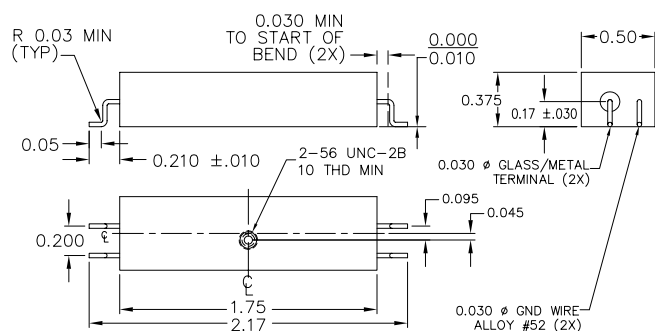

FN-2197WFF

FN-2197W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
KANSAS CITY, MO 64120

816-231-7375

FAX 816-241-0368


WWW.FILTRO.NET

TOLERANCES UNLESS NOTED


.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 11/3/03

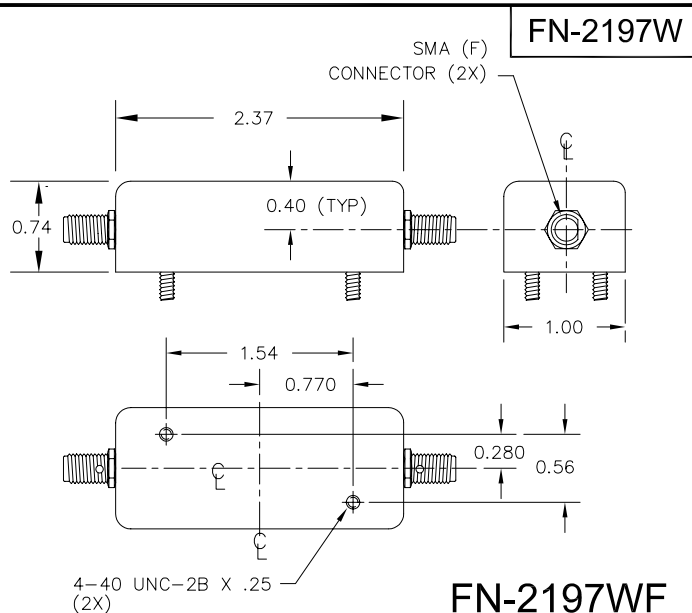

FN-2197WF

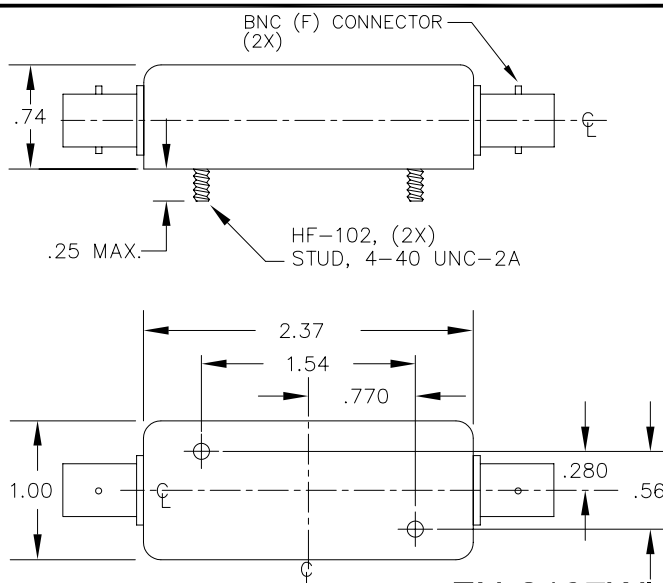

FN-2197WK

FN-2197WS

