

FN-2213W

BANDPASS FILTER

Fo: 639 MHz

IMPEDANCE : 75 ohm IN/OUT



INSERTION LOSS: 6.5 dB MAX

RIPPLE: 0.1 dB MAX

3dB BANDWIDTH: 10 MHz MIN

80dB BANDWIDTH: 200 MHz MAX

OPERATING TEMPERATURE : 0°C to +70°C

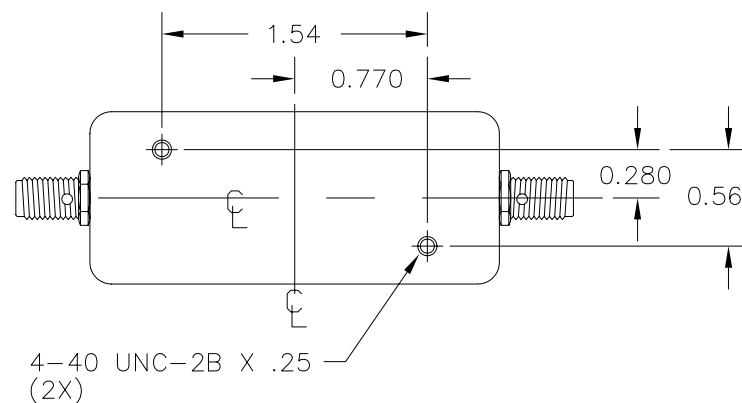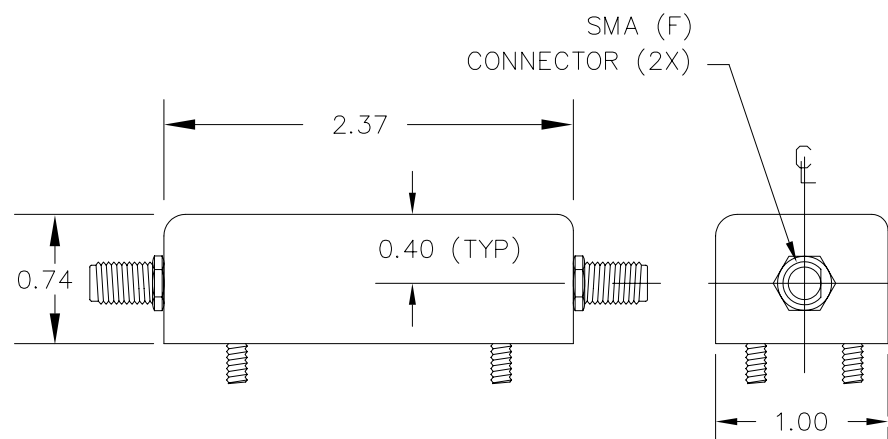

FN-2213W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 11/3/03

(STYLE F)

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.