


TUNABLE BANDPASS FILTER

F₀ TUNING RANGE: 340-385 MHz
IMPEDANCE : 50 ohm IN/OUT
INSERTION LOSS: 5.0 MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 7 MHz MIN / 14 MHz MAX
20dB BANDWIDTH: 30 MHz MAX
30dB BANDWIDTH: 40 MHz MAX
ULTIMATE ATTENUATION: 70 dB MIN
OPERATING TEMPERATURE : -40°C to +85°C

CONSULT FACTORY FOR CONNECTERIZED/OTHER CONFIGURATIONS

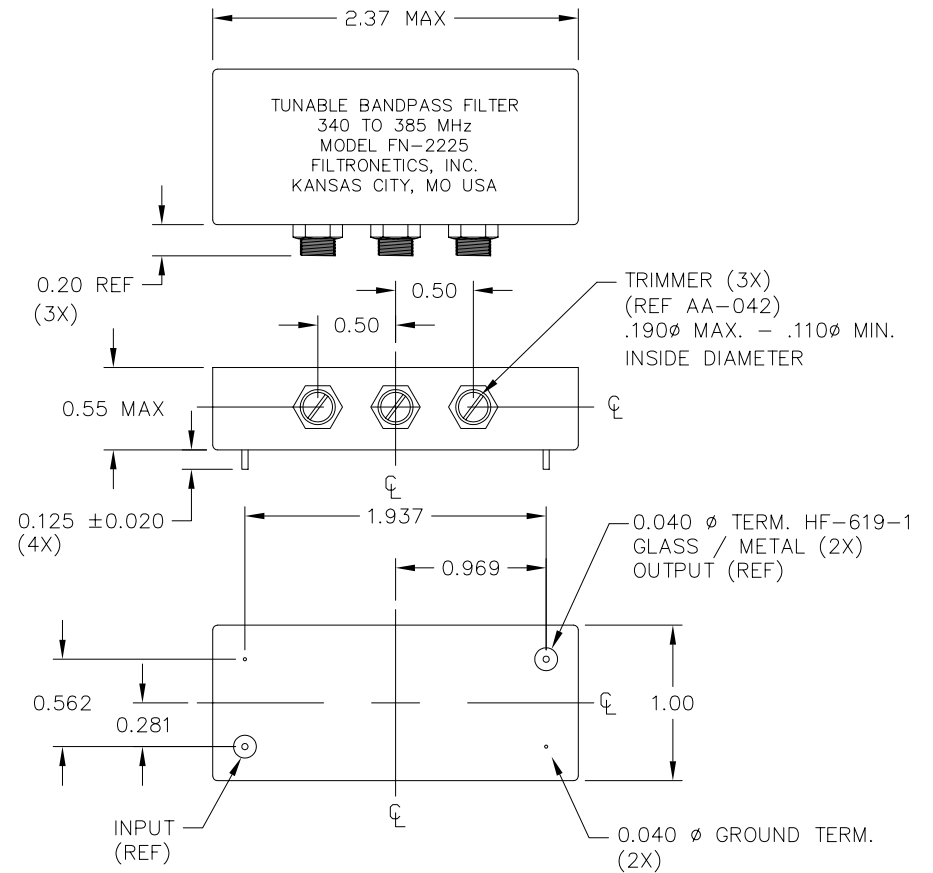

FN-2225W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 11/3/03