


BANDPASS FILTER


Fo:	160.0 MHz
IMPEDANCE :	50 ohms IN/OUT
INSERTION LOSS:	8.0 dB MAX
RIPPLE:	0.5 dB MAX
3dB BANDWIDTH:	5 MHz MIN
60dB BANDWIDTH:	18 MHz MAX
ULTIMATE ATTENUATION	70 dB, DC to 80 MHz
ABSOLUTE GROUP DELAY @ Fo:	450 nSEC MAX
GROUP DELAY VARIATION (±2 MHz):	200 nSEC MAX
OPERATING TEMPERATURE :	0°C to +71°C

FN-2227W

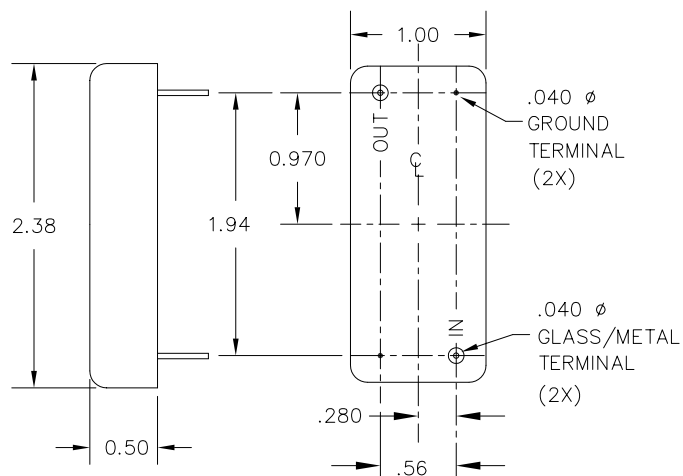

FN-2227WB

FN-2227W

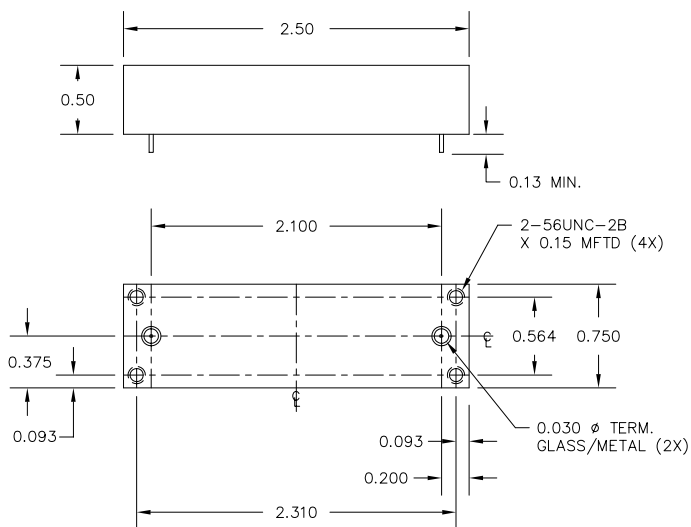

FN-2227W DRAWING SUMMARY


FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

$$\begin{aligned} .XX &= \pm .020 \\ .XXX &= \pm .010 \end{aligned}$$


ANGLE = $\pm 1^\circ$
HOLES = $\pm .002$

REVISÉ 12/5/03

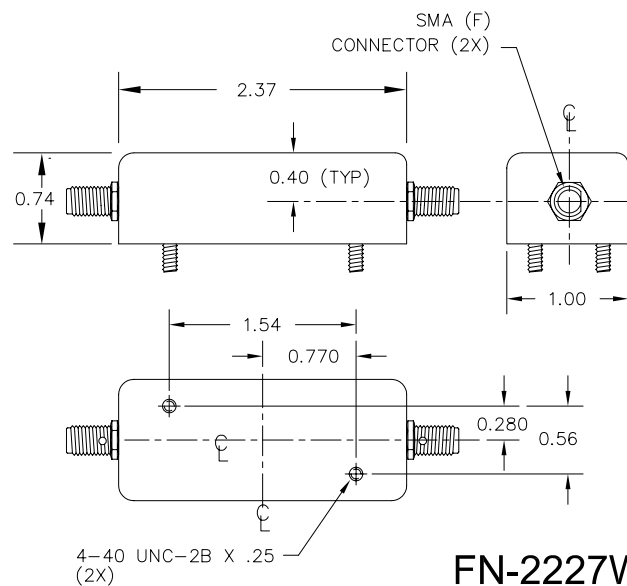

FN-2227WF

FN-2227WK

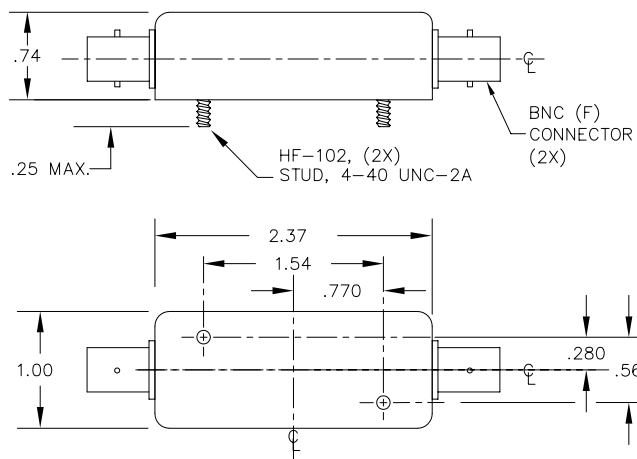

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.