


BANDPASS FILTER



Fo: 160.0 MHz
IMPEDANCE : 50 ohms IN/OUT
INSERTION LOSS: 2.5 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 25 MHz MIN
60dB BANDWIDTH: 65 MHz MAX
ULTIMATE ATTENUATION: 70 dB, DC to 80 MHz
ABSOLUTE GROUP DELAY @ Fo: 75 nSEC MAX
GROUP DELAY VARIATION (±10 MHz): 40 nSEC MAX
OPERATING TEMPERATURE : 0°C to +71°C

FN-2229W

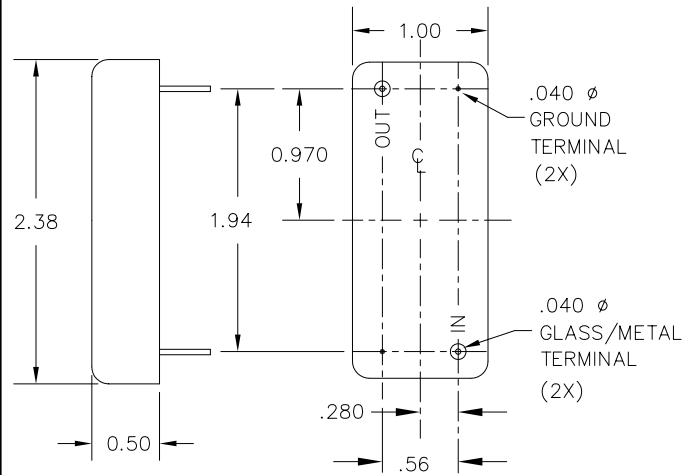


FN-2229WB

FN-2229W

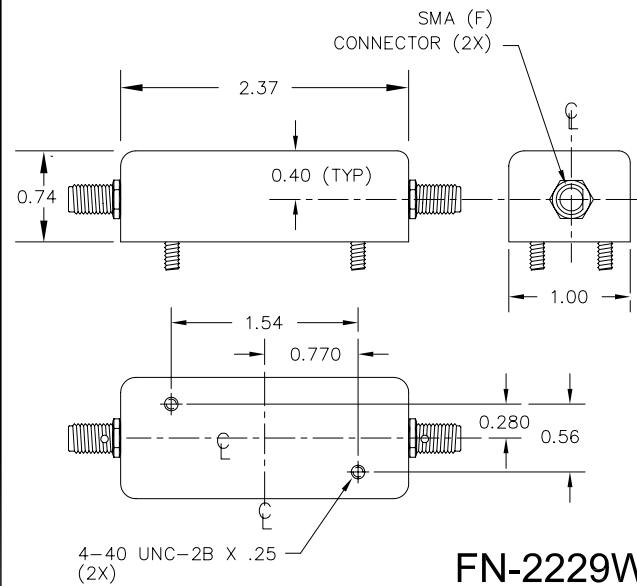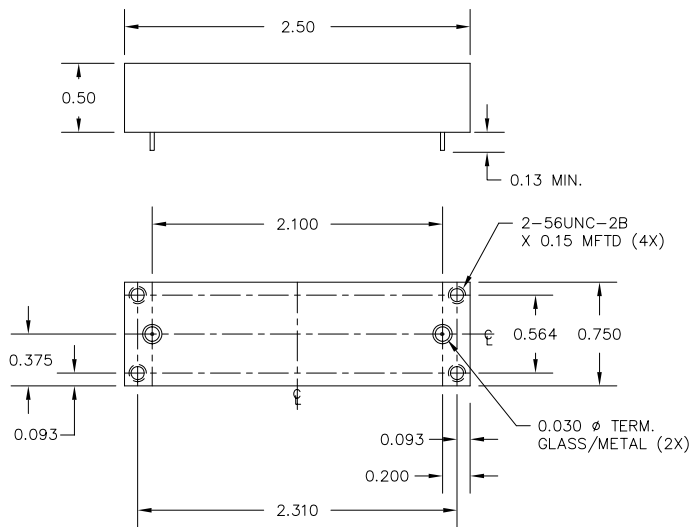

FN-2229WF

FN-2229WK

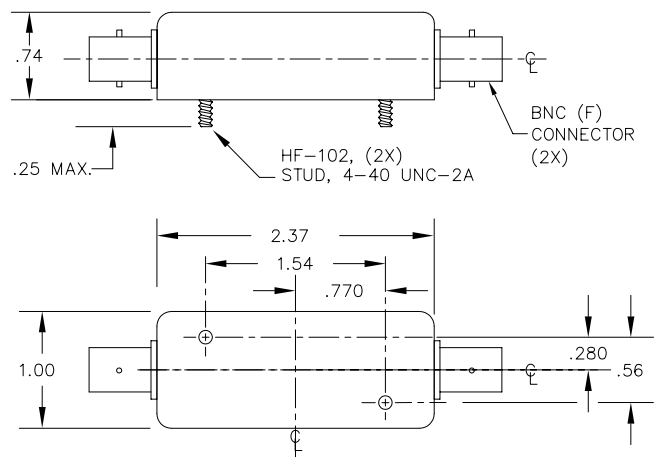

FN-2229W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = \pm .020
 .XXX = \pm .010

ANGLE = \pm 1°
 HOLES = \pm .002

REVISED 12/5/03