




BANDPASS FILTER

Fo: 160.0 MHz
IMPEDANCE : 50 ohms IN/OUT
INSERTION LOSS: 1.5 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 50 MHz MIN
60dB BANDWIDTH: 130 MHz MAX
ULTIMATE ATTENUATION 70 dB, DC to 80 MHz
ABSOLUTE GROUP DELAY @ Fo: 40 nSEC MAX
GROUP DELAY VARIATION (±20 MHz): 20 nSEC MAX
OPERATING TEMPERATURE : 0°C to +71°C

FN-2232W

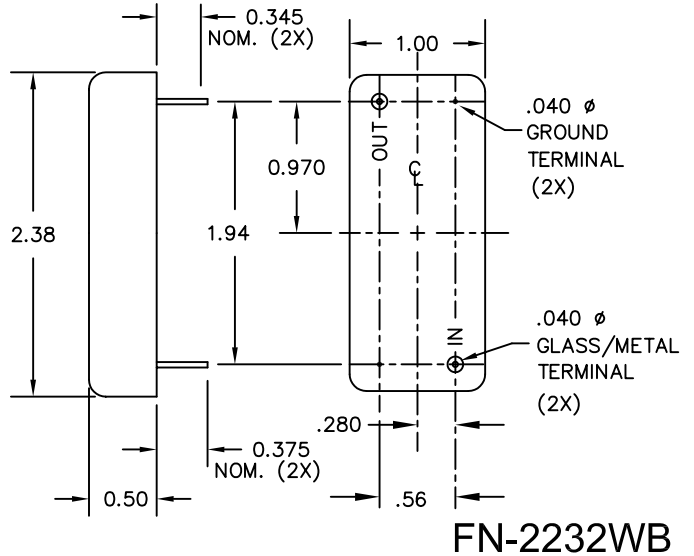

FN-2232W

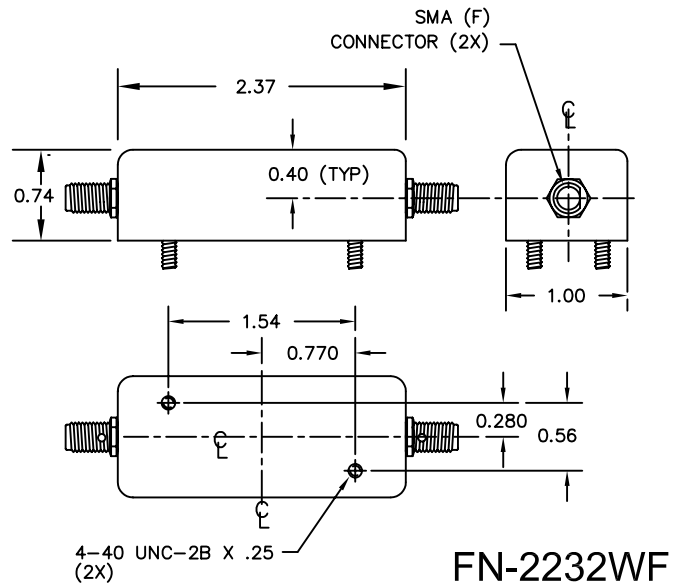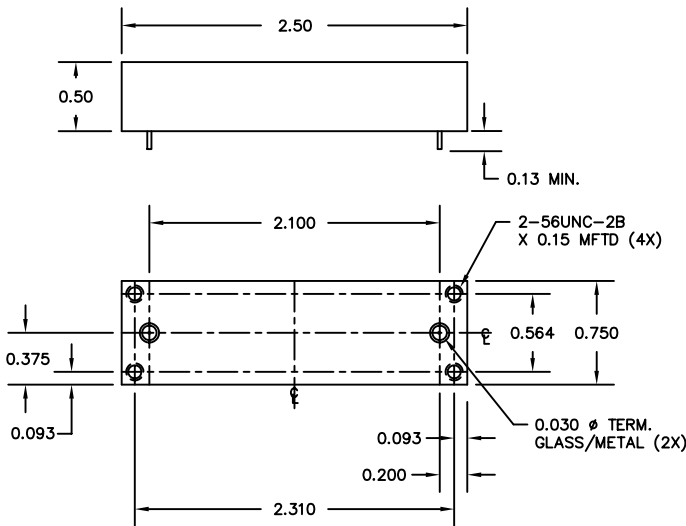

FN-2232WF

FN-2232W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 10/21/13

