


BANDPASS FILTER

*
 Fo: 69.5 MHz
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 7.5 dB MAX
 RIPPLE: 1.0 dB MAX
 3dB BANDWIDTH: 375 KHz MIN
 60dB BANDWIDTH: 1.75 MHz MAX
 ULTIMATE ATTENUATION: 60 dB UP TO 200 MHz
 SPURIOUS: 60 dB MAX
 OPERATING TEMPERATURE : 0°C to +60°C

*
 AVAILABLE AT 70 & 75 MHz

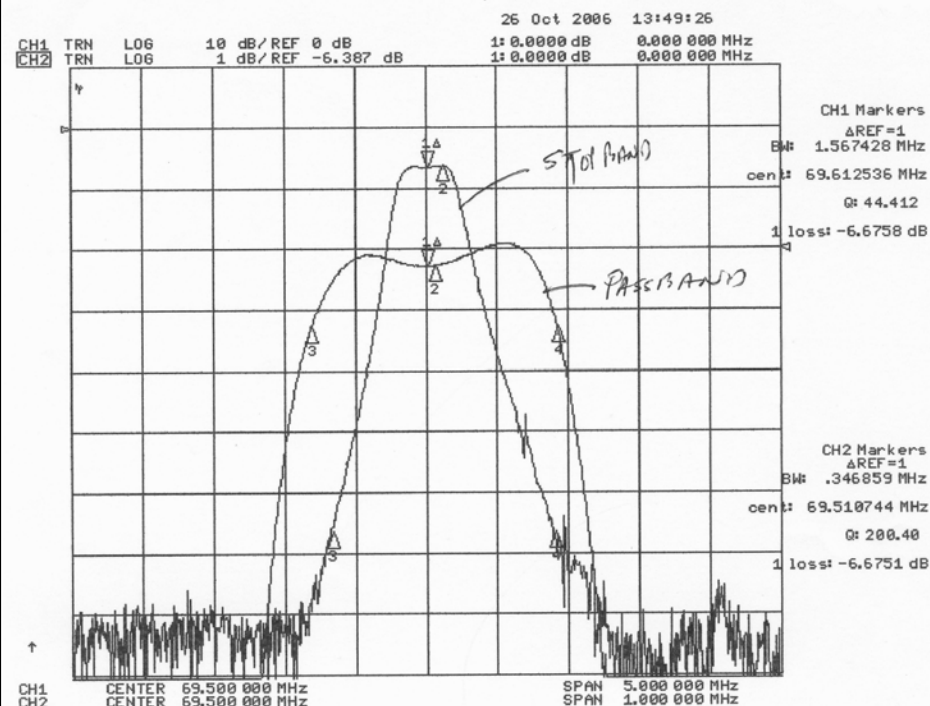

FN-2269W DRAWING SUMMARY SHEET 1 of 2





FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 07/23/12 ECO 4379

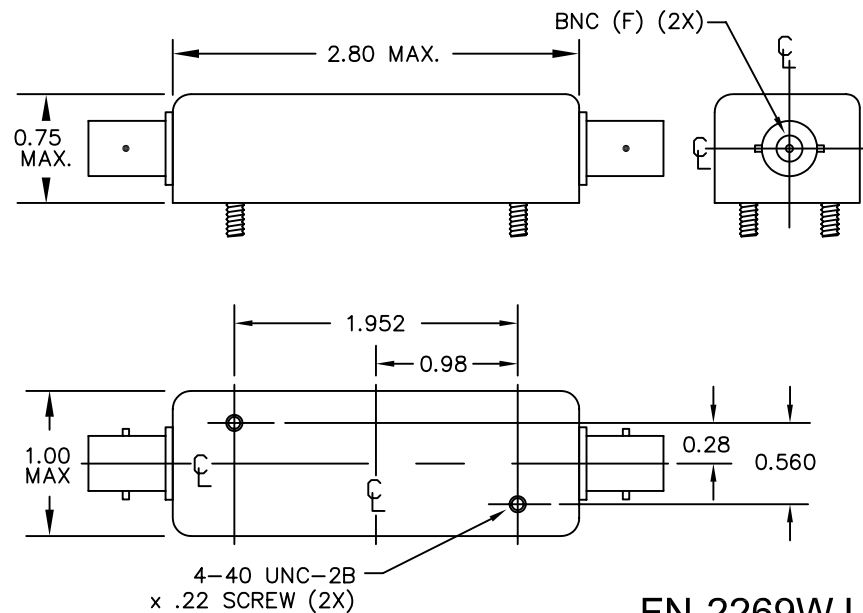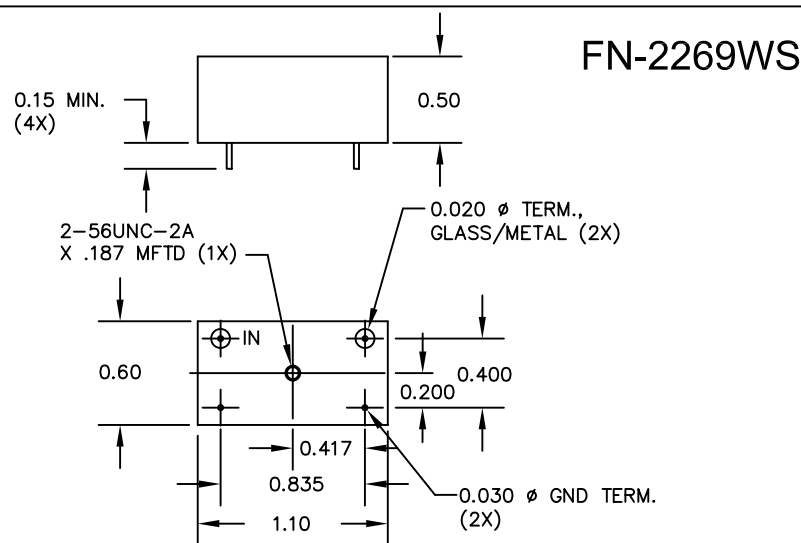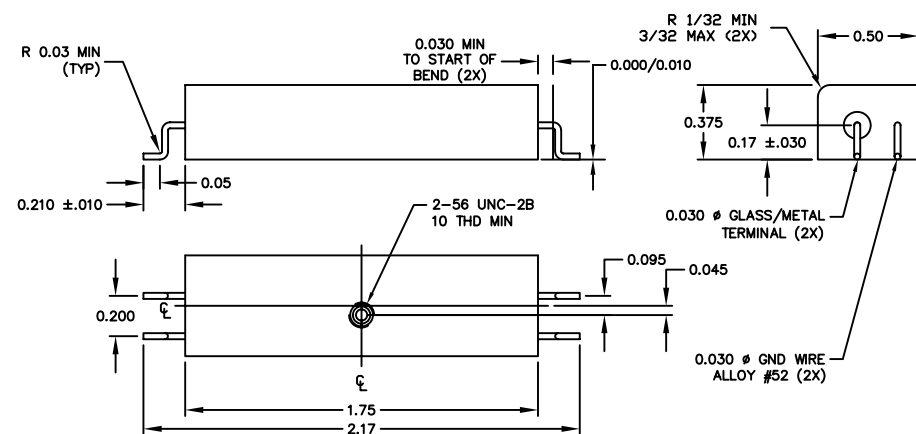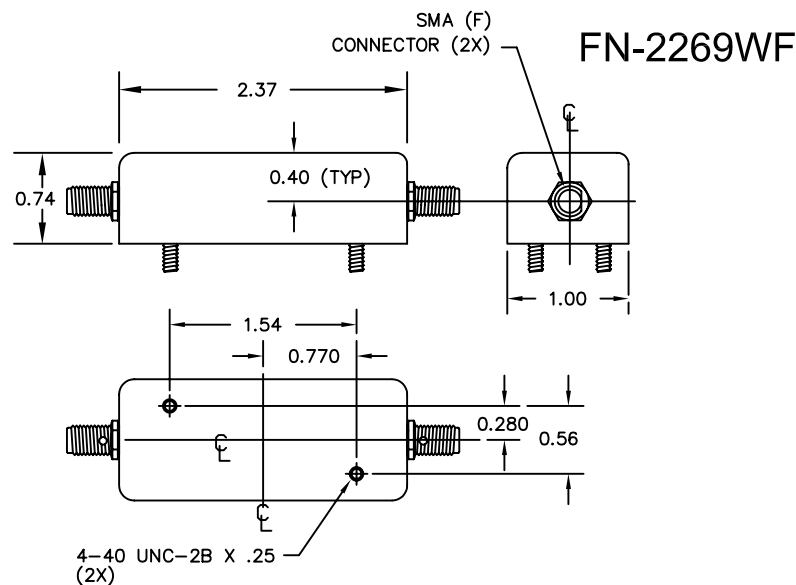

FN-2269WJJ

FN-2269W DRAWING SUMMARY SHEET 2 of 2

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 07/23/12 ECO 4379