




BANDPASS FILTER

Fo: 21.4 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 7 dB MAX
RIPPLE: 0 dB
3dB BANDWIDTH: 50 KHz MIN
60dB BANDWIDTH: 400 KHz MAX
SPURIOUS ATTENUATION: 60 dB MIN
GROUP DELAY (± 25 KHz) : 3 μ SEC MAX VARIATION
OPERATING TEMPERATURE : -40°C to +70°C

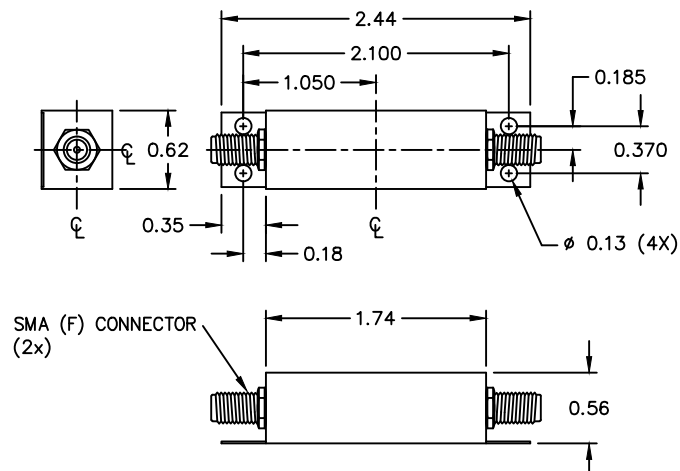

FN-2286WT

FN-2286WS

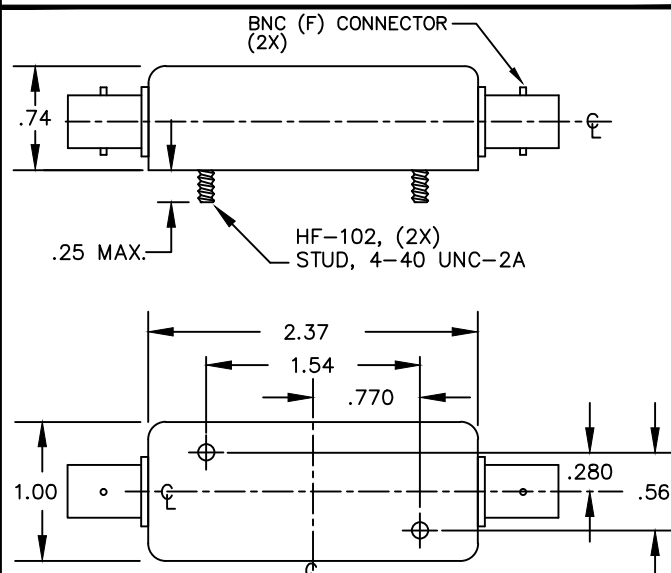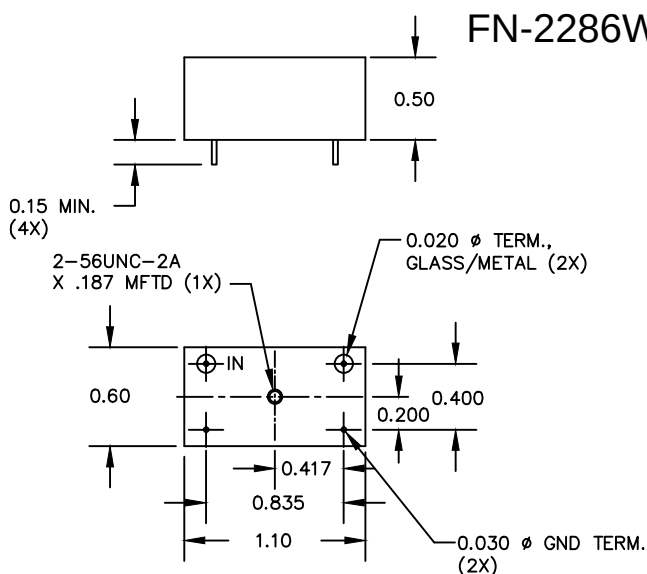

FN-2286WK

FN-2286W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
 .XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
 HOLES = $\pm .002$

REVISED 02/06/12 ECO 4359

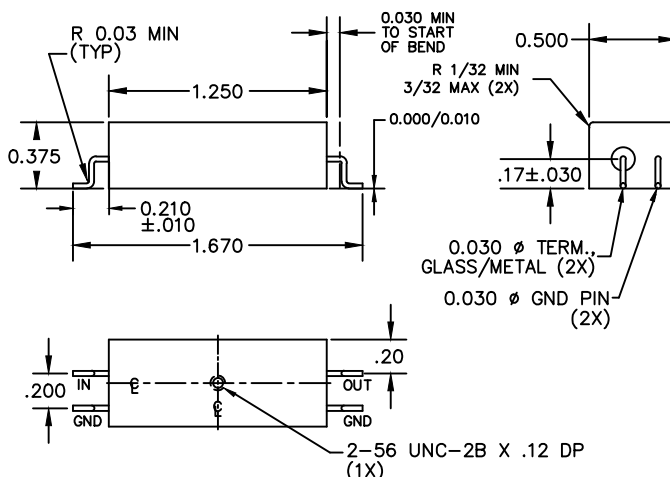

FN-2286WEE