




BANDPASS FILTER

Fo: 21.40 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 10.0 dB MAX @ Fo
RIPPLE: 3.0 dB MAX
3dB BANDWIDTH: ±100 KHz MIN
60dB BANDWIDTH: ±175 KHz MAX
ULTIMATE ATTENUATION: 60 dB MIN
OPERATING POWER: -80 dBm to +5 dBm
OPERATING TEMPERATURE : -20°C to +70°C


FN-2375W

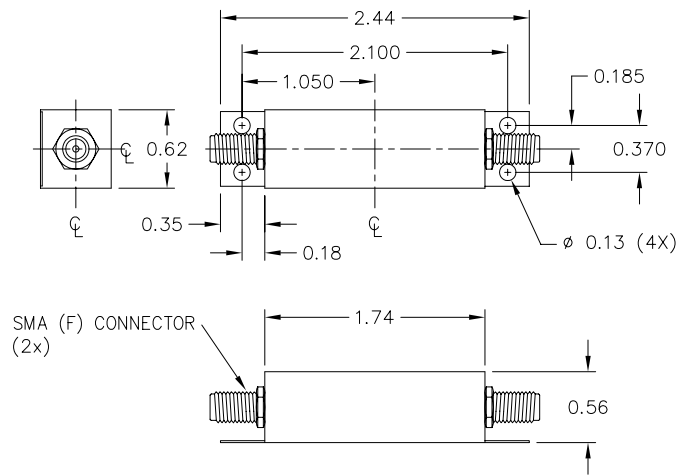

FN2375WT

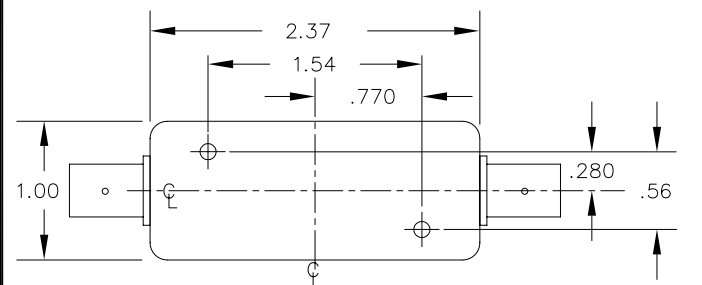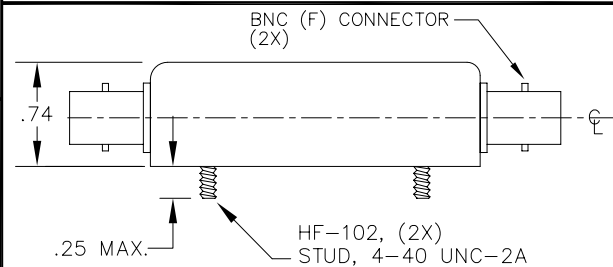


FN-2375WK

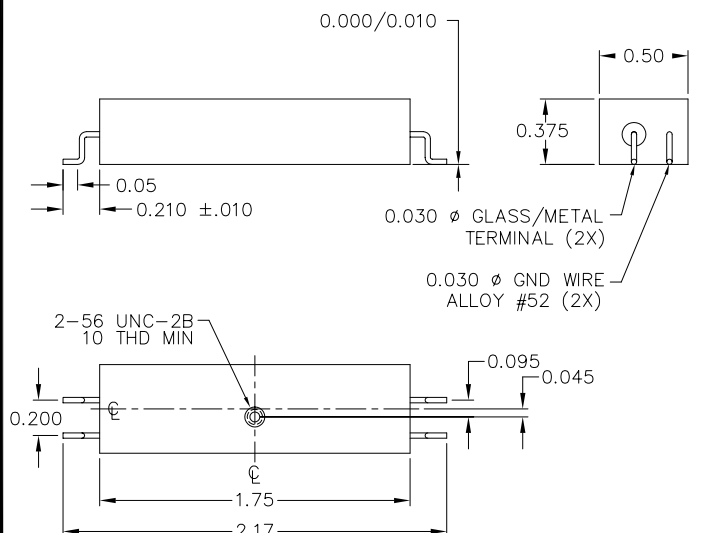

FN-2375WFF

FN-2375W

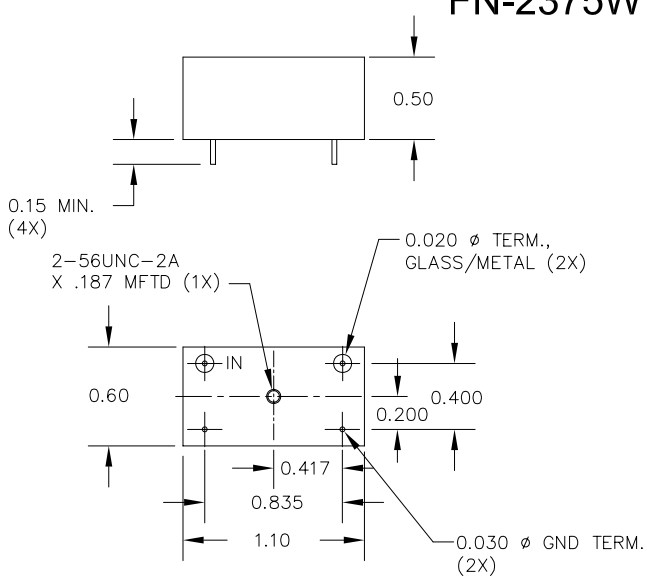

FN-2375W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 5/20/2005