

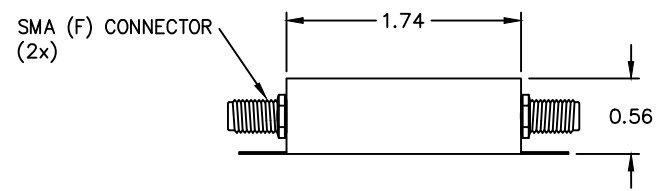


BANDPASS FILTER



Fo: 100 MHz
3dBc BANDWIDTH: 25 KHz MIN
60 dBc BANDWIDTH: 160 KHz MAX
SPURIOUS: 60 dB MIN
INSERTION LOSS: 4.0 dB MAX
IMPEDANCE: 50 OHMS (IN & OUT)
RIPPLE: 0.25 dB MAX, 0 dB TYP
OPERATING TEMPERATURE: -30° to +70°C

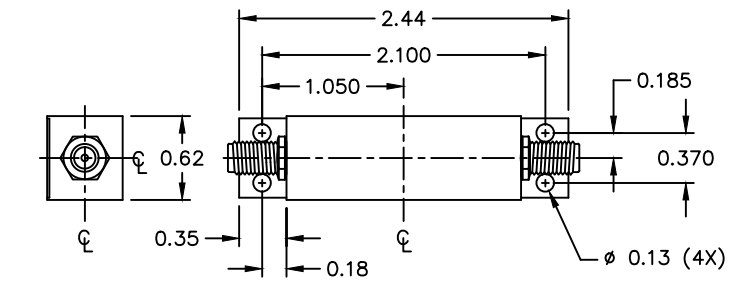

FN-2431WT

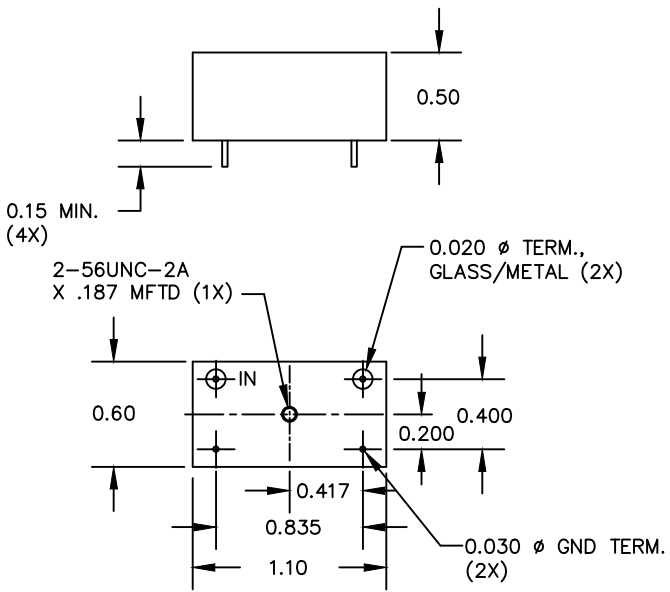

FN-2431W

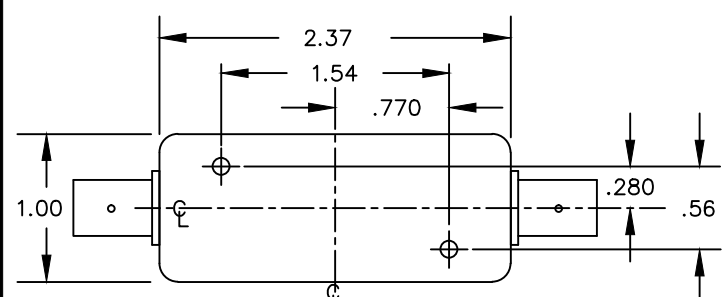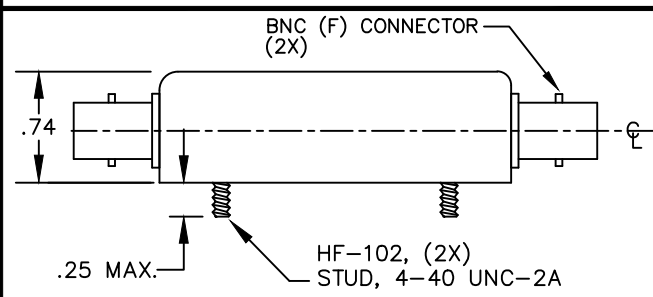

FN-2431WK



FN-2431W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 03/16/2012 PER ECO 4374

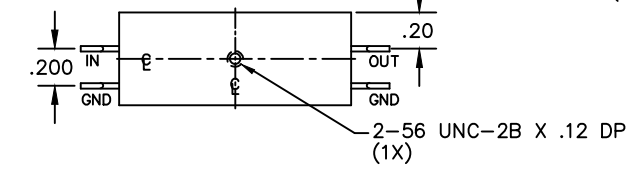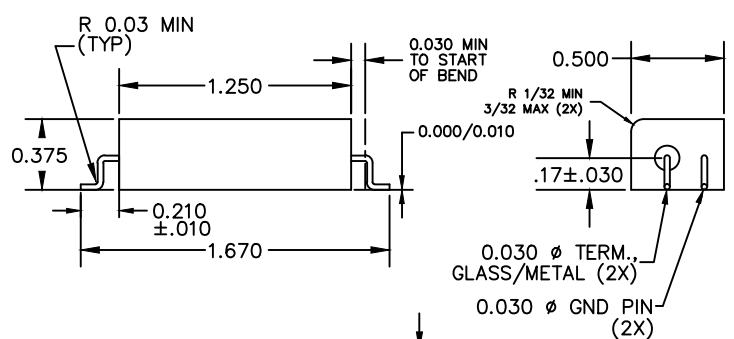

FN-2431WEE