
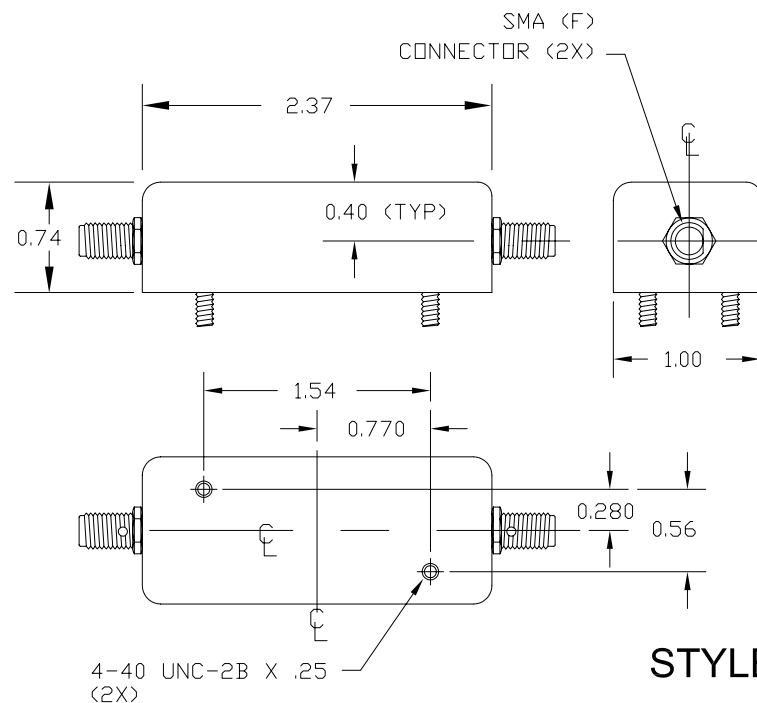


NOTCH FILTER

Fo: 70 MHz
3 dB BANDWIDTH : ±20 KHz MAX
30 dB BANDWIDTH : ±3 KHz MIN
50 dB BANDWIDTH : ± 1 KHz MIN
INSERTION LOSS : 2.0 dB MAX
IMPEDANCE : 50 OHMS (IN & OUT)
RIPPLE (50 to 90 MHz) : 1 dB MAX
OPERATING TEMPERATURE : -0°C TO +50°C

FN-2506W

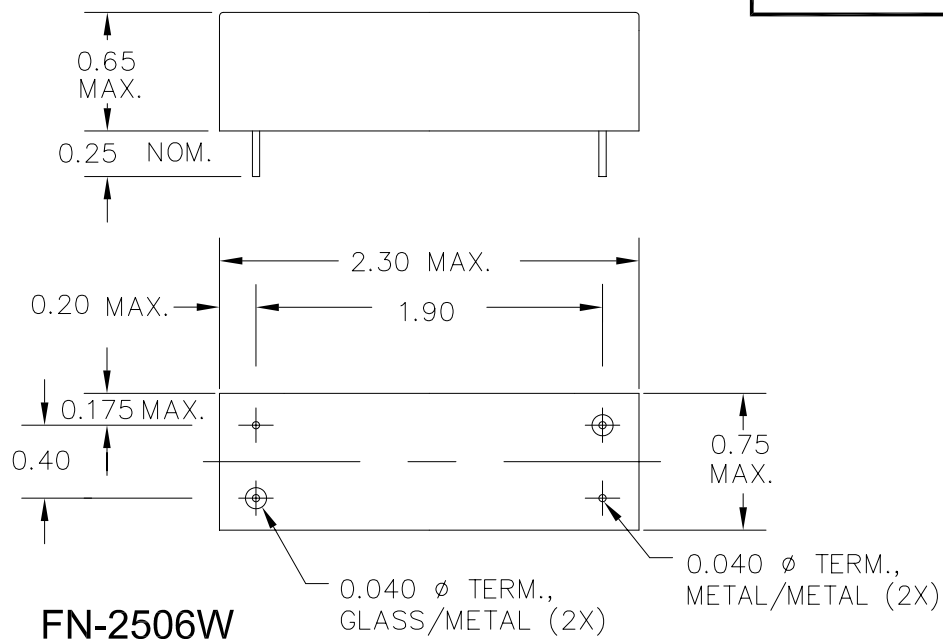

FN-2506W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES ± .002
.XX = ± .020	
.XXX = ± .010	

REVISED 1/7/2003