
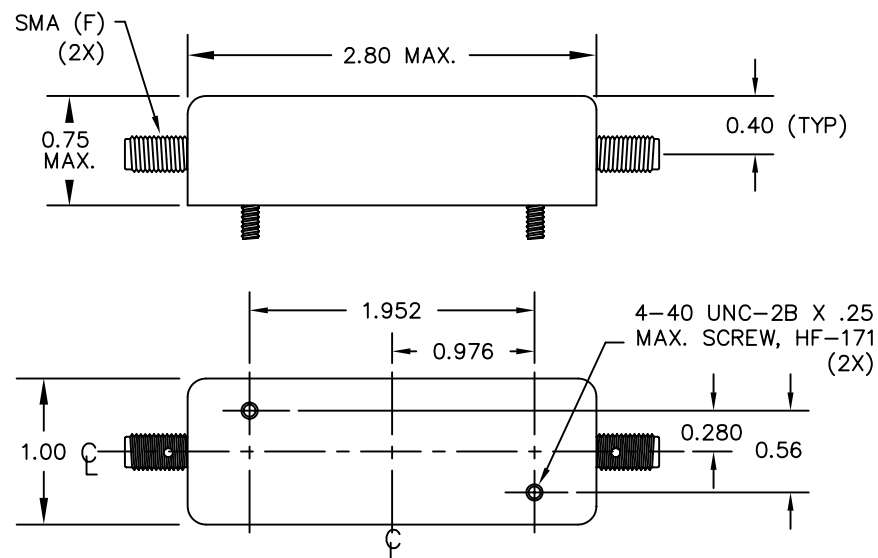
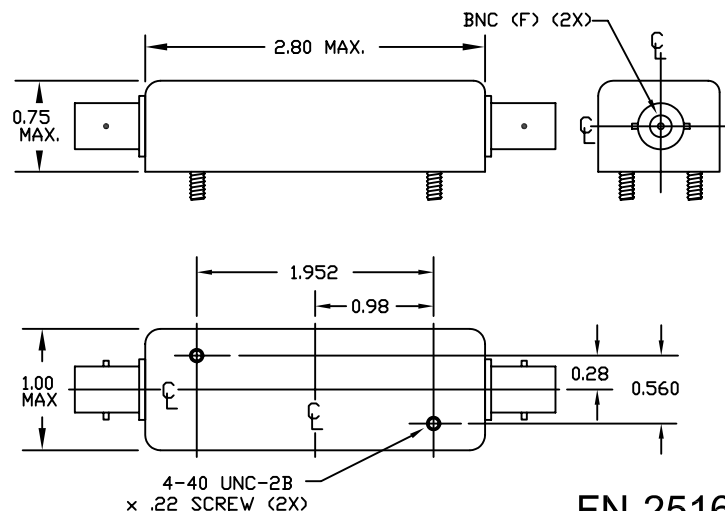


BANDPASS FILTER

Fo: 45.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 7.5 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 40 KHz MIN
60dB BANDWIDTH: 90 KHz MAX
GROUP DELAY (± 12 KHz): 5 μ SEC MAX
VARIATION (± 20 KHz): 25 μ SEC MAX
OPERATING TEMPERATURE : +15°C to +35°C

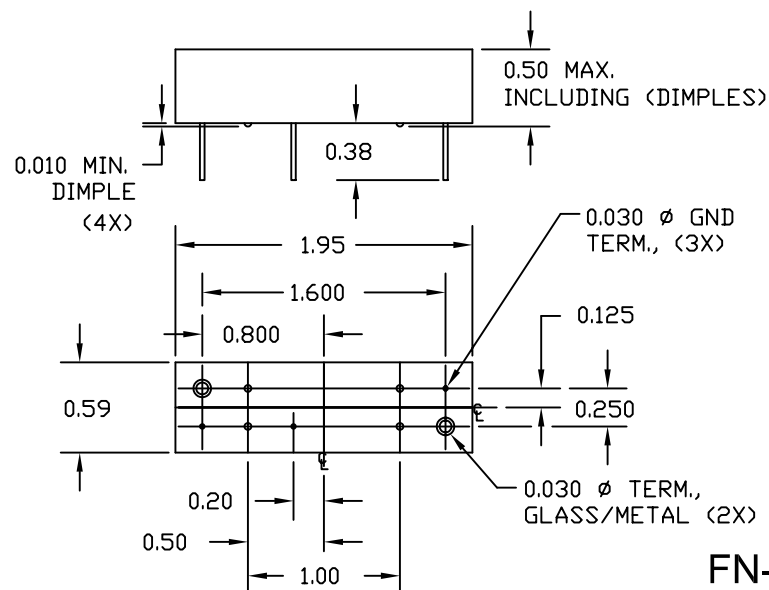

FN-2516W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 8/1/05

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY. DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.