
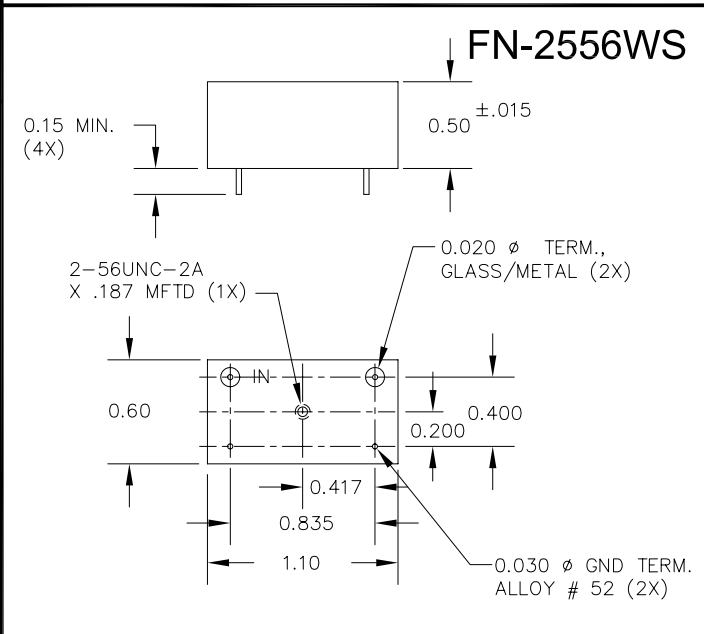
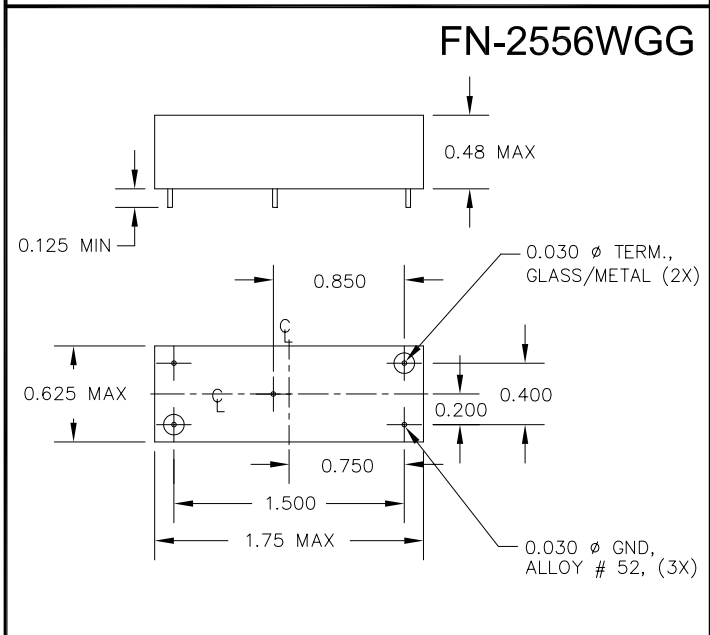


BANDPASS FILTER

Fo: 21.4 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 5 dB MAX
RIPPLE: 1 dB MAX
1dB BANDWIDTH: ±50 KHz MIN
45dB BANDWIDTH: 350 KHz MAX
OPERATING TEMPERATURE : -30°C to +65°C

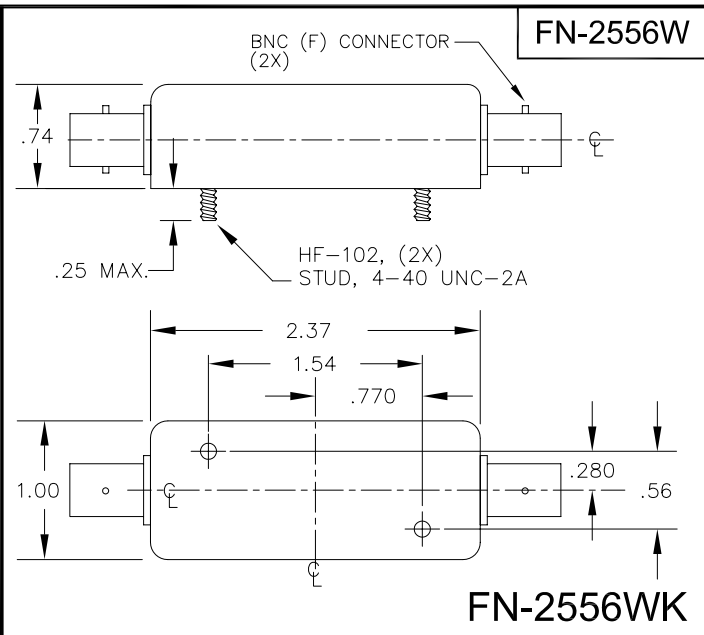

FN-2556W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002
REVISED 9/8/2004	

