




BANDPASS FILTER

Fo: 70.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 4.0 dB MAX
RIPPLE: 1.0 dB MAX
1dB BANDWIDTH: ± 40 KHz MIN
3dB BANDWIDTH: ±50 KHz NOM
70dB BANDWIDTH: ±200 KHz MAX
PHASE LINEARITY (±35 KHz): ±6° MAX
OPERATING TEMPERATURE : -20°C to +85°C
OPERATIONAL POWER : 0 dBm MAX

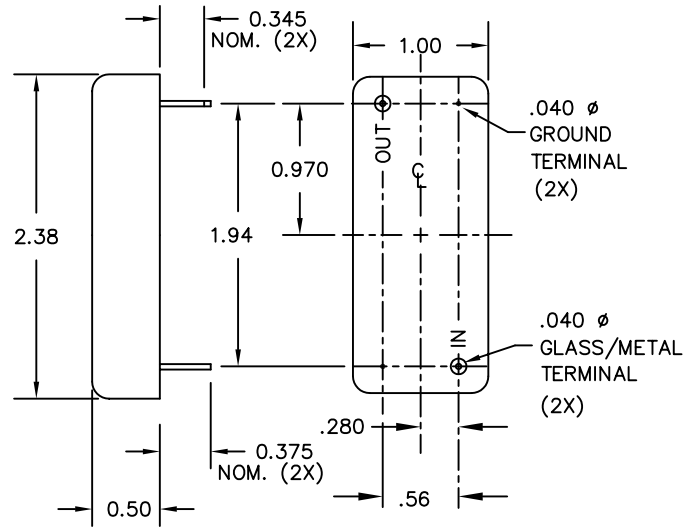

FN-2579WB

FN-2579W

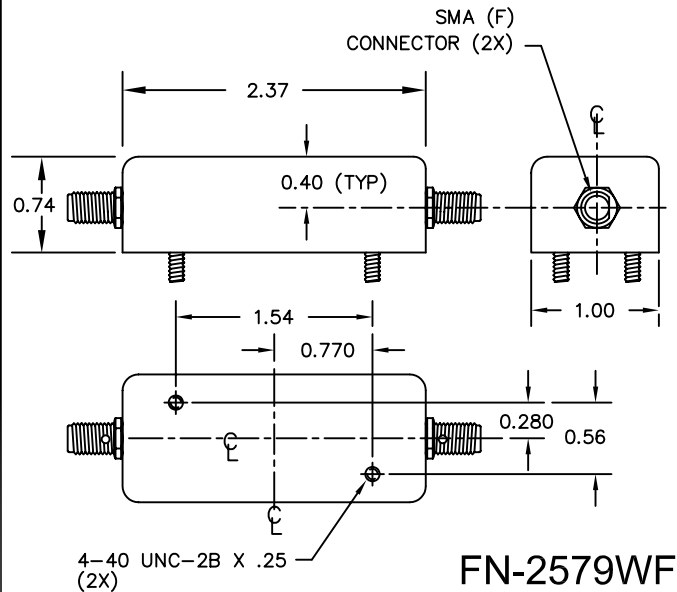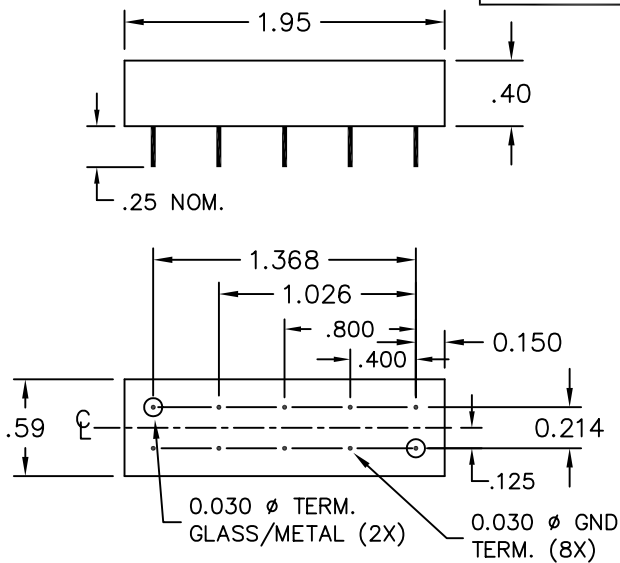

FN-2579WF

FN-2579W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 10/21/2013

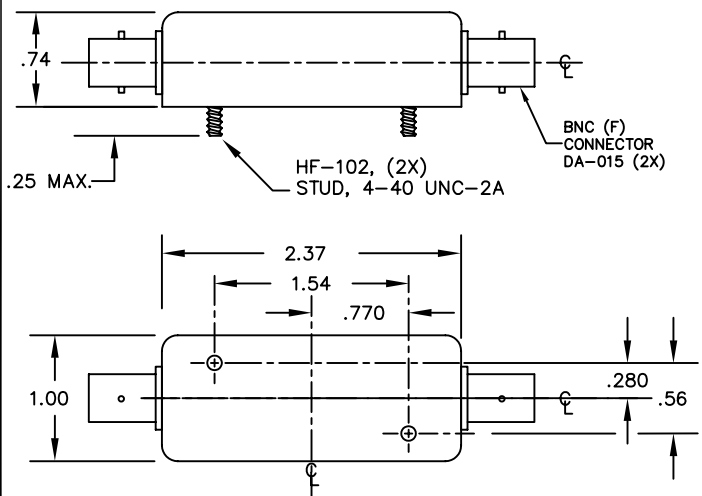

FN-2579WK