



BANDSTOP FILTER

Fo: 150.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 2.5 dB MAX
RIPPLE (± 10 MHz): 2.0 dB MAX
3dB BANDWIDTH: ± 10 MHz MIN
3dB BANDWIDTH: 90 KHz MAX
40dB BANDWIDTH: 15 KHz MIN (20 KHz TYP)
OPERATING TEMPERATURE : +10°C to +35°C
INPUT LEVEL: 0 dBm MAX

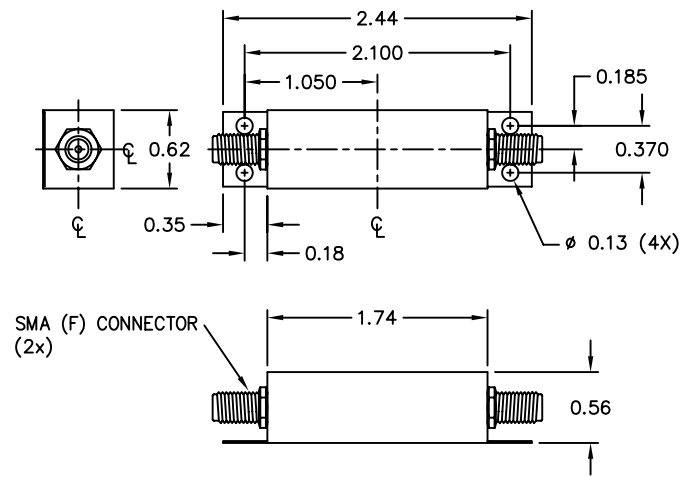


FN-2623WT

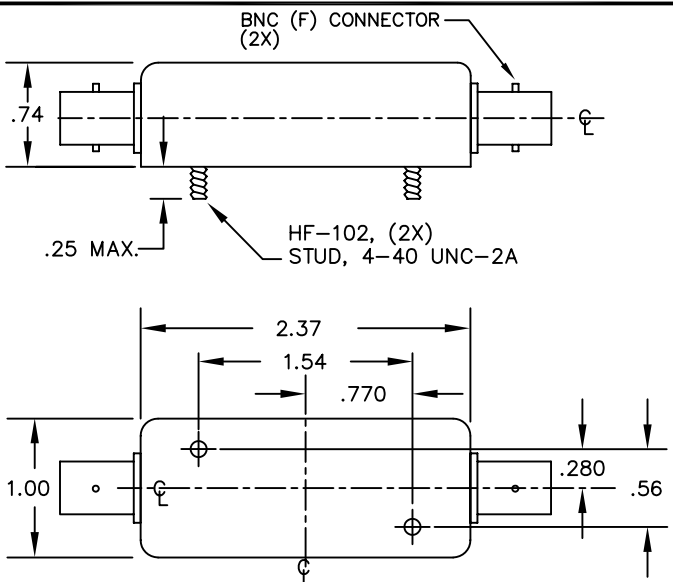

FN-2623WK

FN-2623W

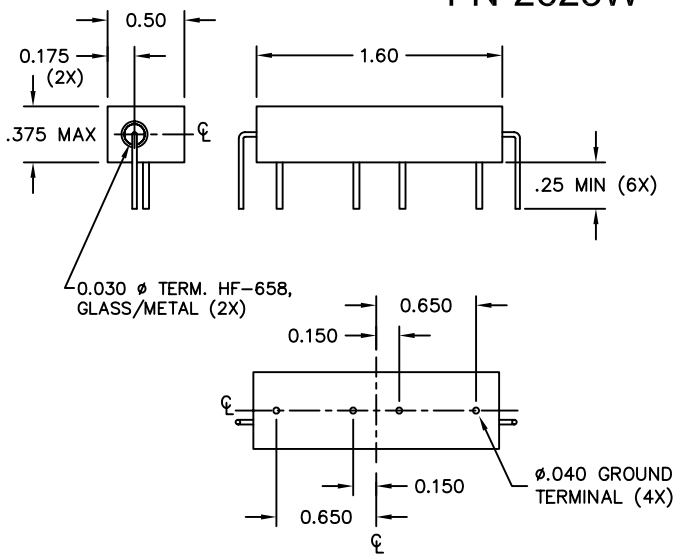

FN-2623W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = $\pm .020$
.XXX = $\pm .010$

ANGLE = $\pm 1^\circ$
HOLES = $\pm .002$

REVISED 09/19/2013 PER ECO 4511

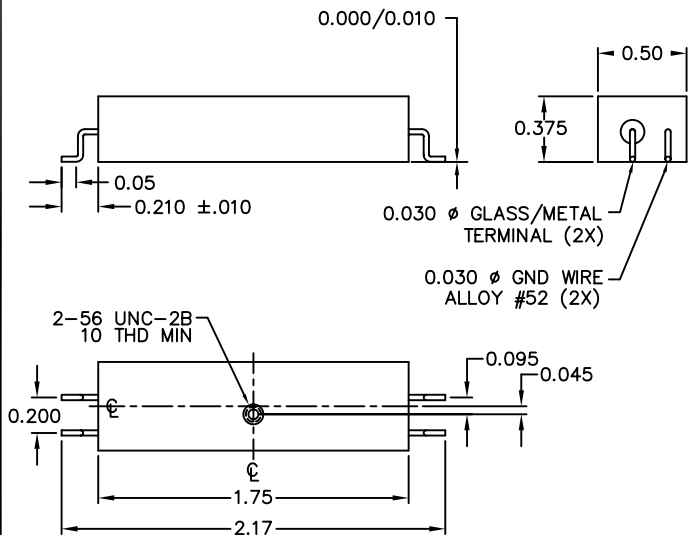

FN-2623WFF