BANDPASS FILTER

FN-2758W

Fo:	70.0 MHz
IMPEDANCE :	75 OHMS (IN & OUT) *
INSERTION LOSS:	8.0 dB MAX
RIPPLE:	0.75 dB MAX
3dB BANDWIDTH:	±200 KHz MIN
60dB BANDWIDTH:	+800 KHz MAX
	-650 KHz MAX
SPURIOUS ATTENUATION:	45 dB MIN
OPERATING TEMPERATURE :	0°C to +50°C

* IF 50 OHMS NEEDED, ASK FACTORY

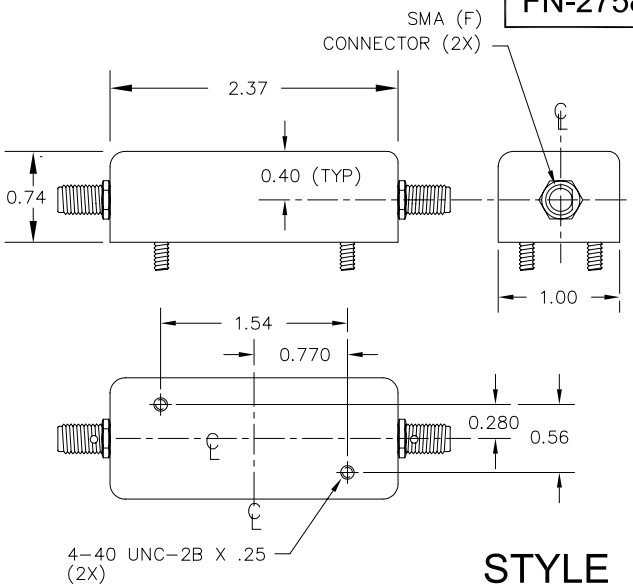

STYLE F

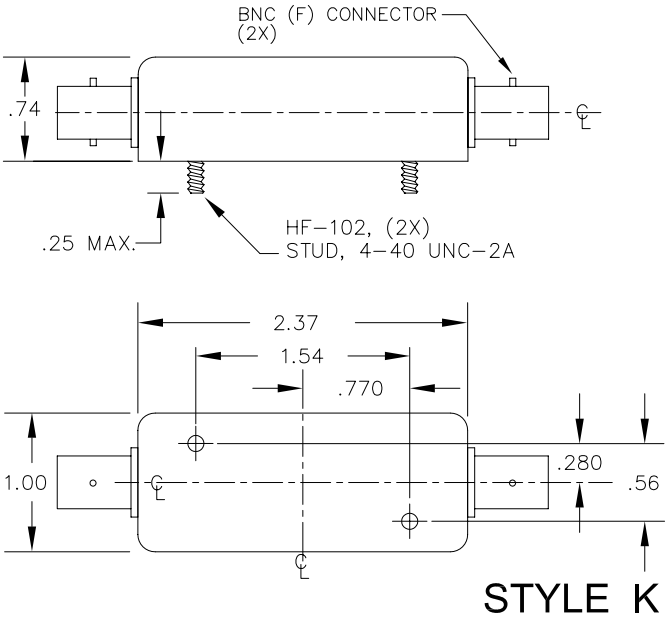

STYLE K

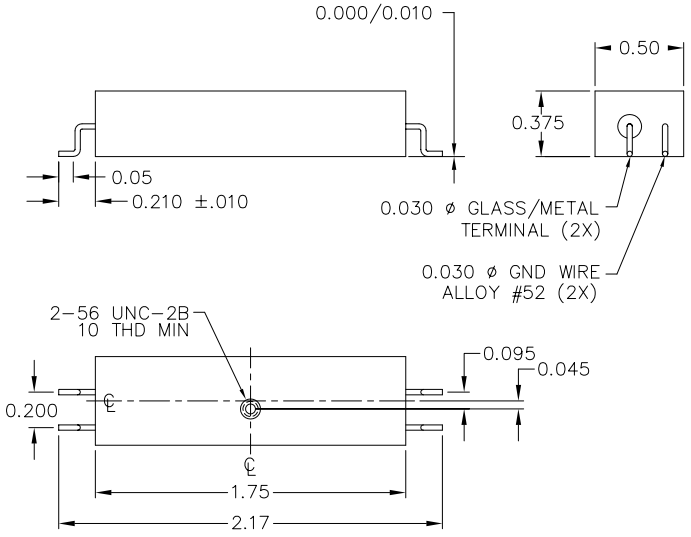

STYLE FF

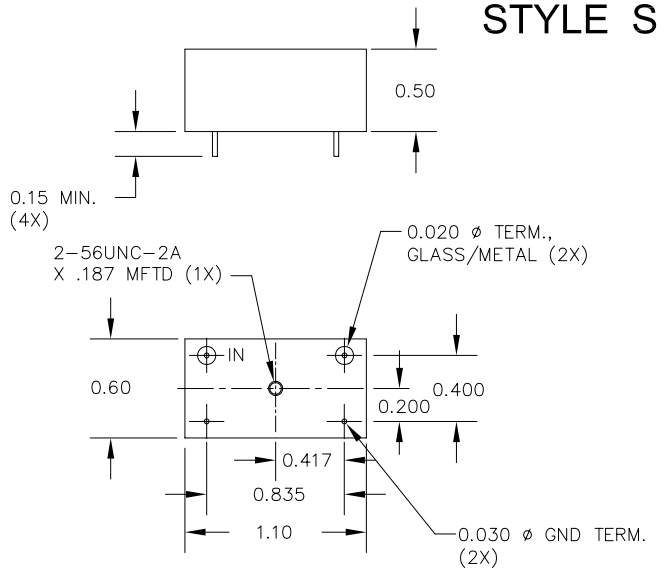

STYLE S

FN-2758W DRAWING SUMMARY

***FILTRO**NETICS, INC.*
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 1/7/2003

FILTRONETICS, INC. PROVIDES CUSTOM FILTERS, PLEASE CONTACT FACTORY.
DRAWING SUBJECT TO CHANGE WITHOUT NOTICE.