


FN-2824W

CRYSTAL BANDPASS FILTER

Fo: 70 MHz
INSERTION LOSS: 6 dB MAX
3 dB BANDWIDTH: 40 KHz NOM
PASSBAND RIPPLE: 1.5 dB MAX
70 dB STOPBAND: 125 KHz MAX
ULTIMATE REJECTION: 70 dB MIN
SOURCE AND LOAD IMPEDANCE : 50 ohms
INPUT POWER: 0 dBm MAX
TEMPERATURE: -35°C TO +65°C


SHIP WITH:
 -2-56 SCREW (HF-129)
 QTY = 3

-AND LOCK WASHER (HF-300)
 QTY = 3

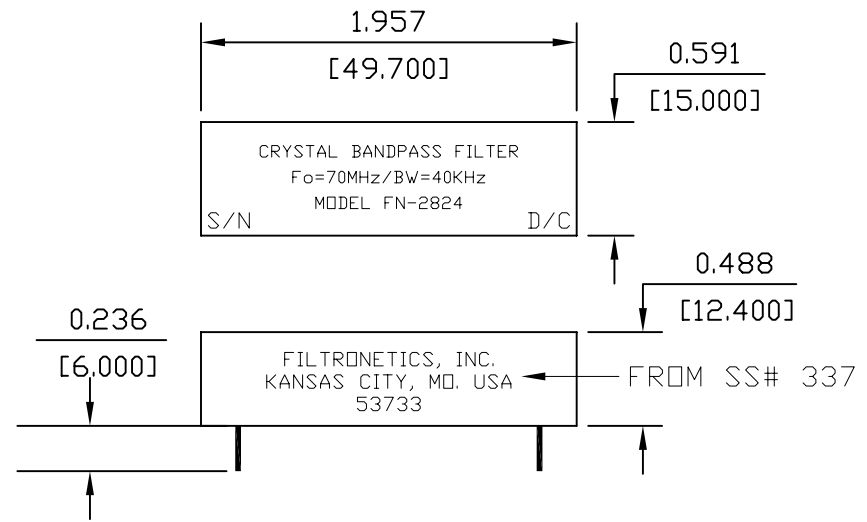

CAN = FA-627
 COVER=FB-604
 COVER=FB-605

TOLERANCES:
 .xx = ±0.508 mm
 .xxx = ±0.254 mm

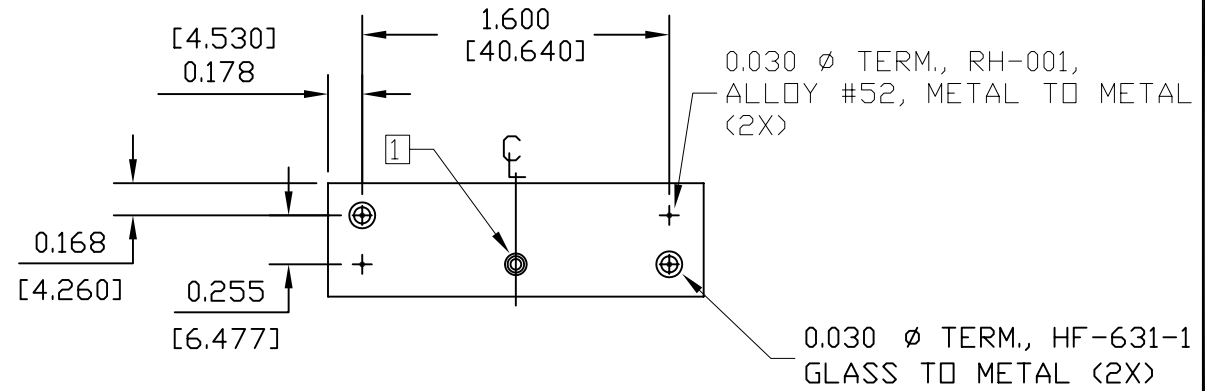

FN-2824W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
ANGLE = ± 1°	HOLES ± .002
.XX = ± .020	
.XXX = ± .010	
REVISED 03/26/2014	

Inches
 [mm]

① 2-56 BLIND INSERT, OPTIONAL USE FOR MECHANICAL & POSITIVE ELECTRICAL GROUND