
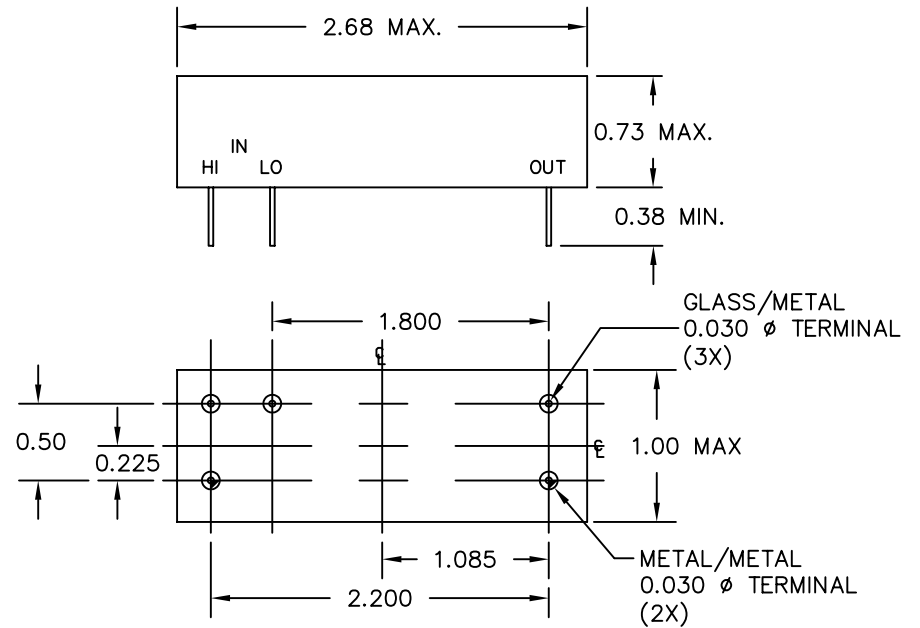
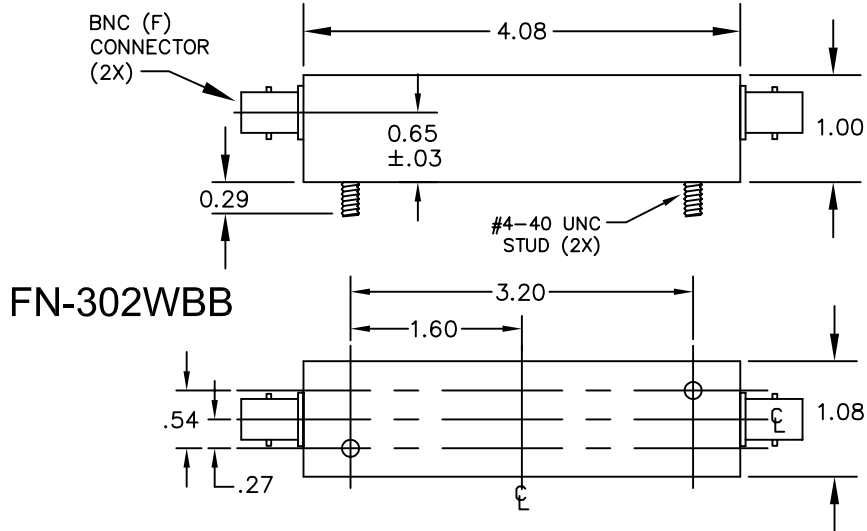


BANDPASS FILTER

Fo: 4.129 MHz
 IMPEDANCE : 50 OHM
 INSERTION LOSS: 12.0 dB MAX
 RIPPLE: 1.0 dB MAX
 3dB BANDWIDTH: 76 KHz MIN
 30dB BANDWIDTH: 180 KHz MAX
 60dB BANDWIDTH: 235 KHz MAX
 OPERATING TEMPERATURE : -40°C to +71°C

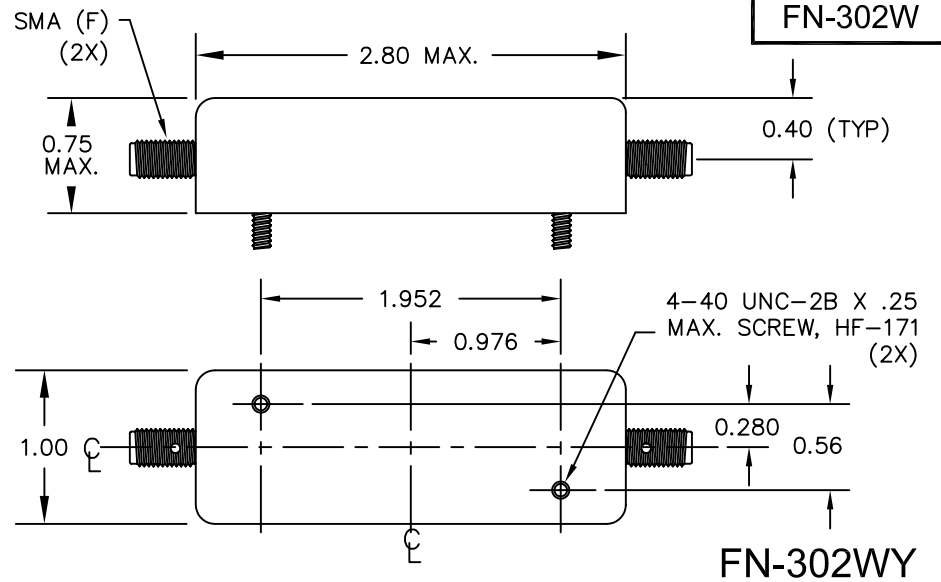

FN-302W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = $\pm 1^\circ$	HOLES
.XX = $\pm .020$	$\pm .002$
.XXX = $\pm .010$	

REVISED 09/14/12 PER ECO 4415