
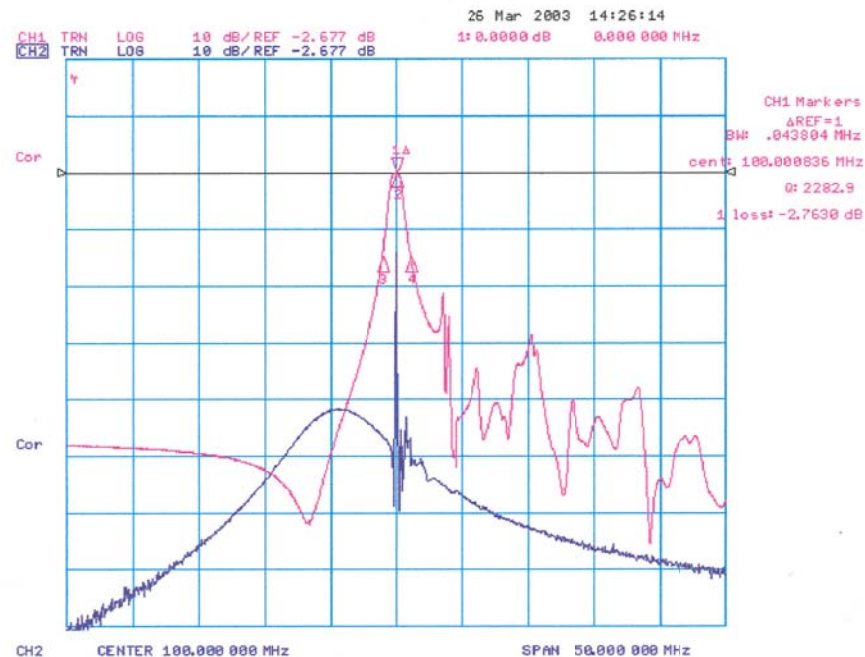


# BANDPASS FILTER

**Fo:** 100 MHz  
**IMPEDANCE :** 50 OHM (IN/OUT)  
**INSERTION LOSS:** 3.0 dB MAX @ Fo  
**RIPPLE:** 1.0 dB MAX  
**3dB BANDWIDTH:** 15 KHz MIN  
**15dB BANDWIDTH:** 100 KHz MAX  
**25dB BANDWIDTH:** 2 MHz MAX  
**OPERATING TEMPERATURE :** -25°C to +75°C

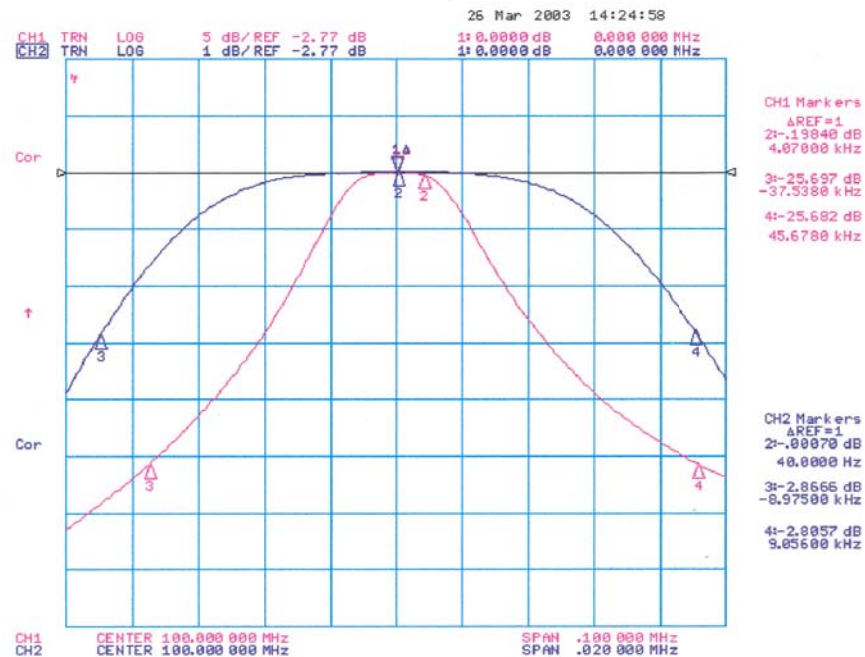

FN-3074W DRAWING SUMMARY SHEET 1 of 2



**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	


REVISED 1/2/08

# FN-3074W

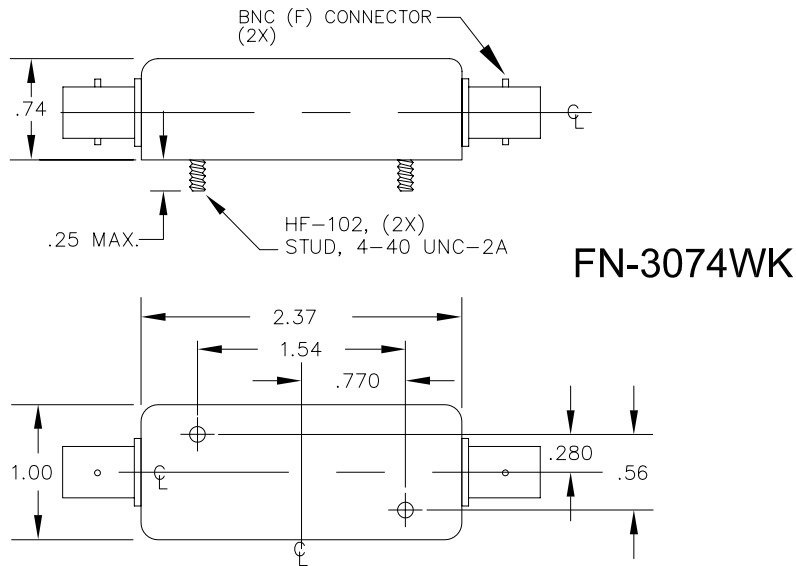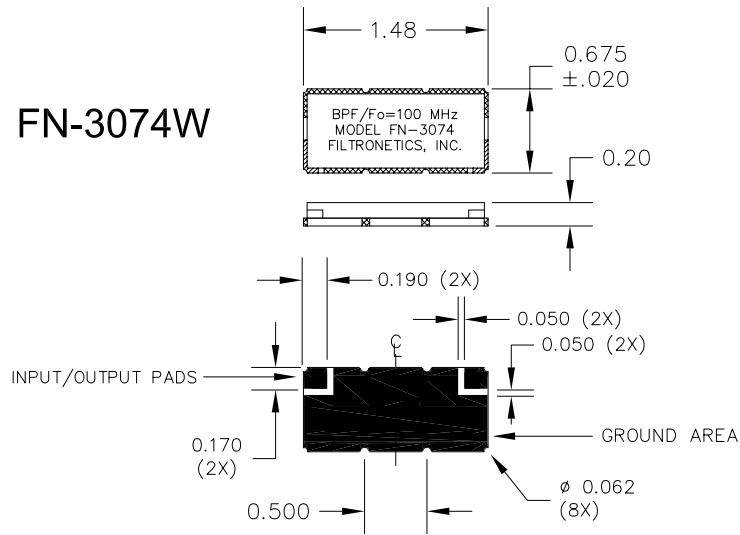


# FN-3074W

## FN-3074WT

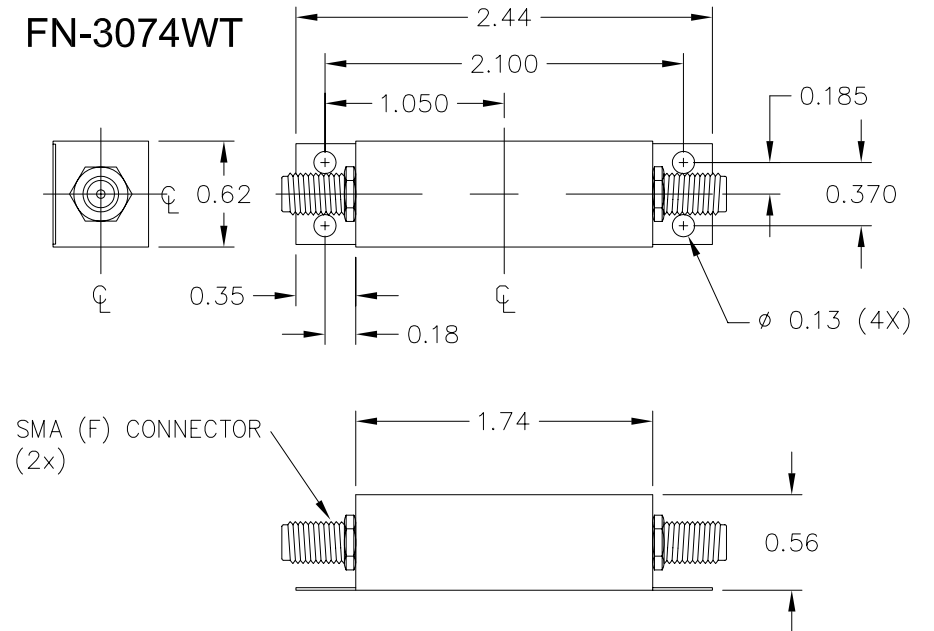

## FN-3074WS

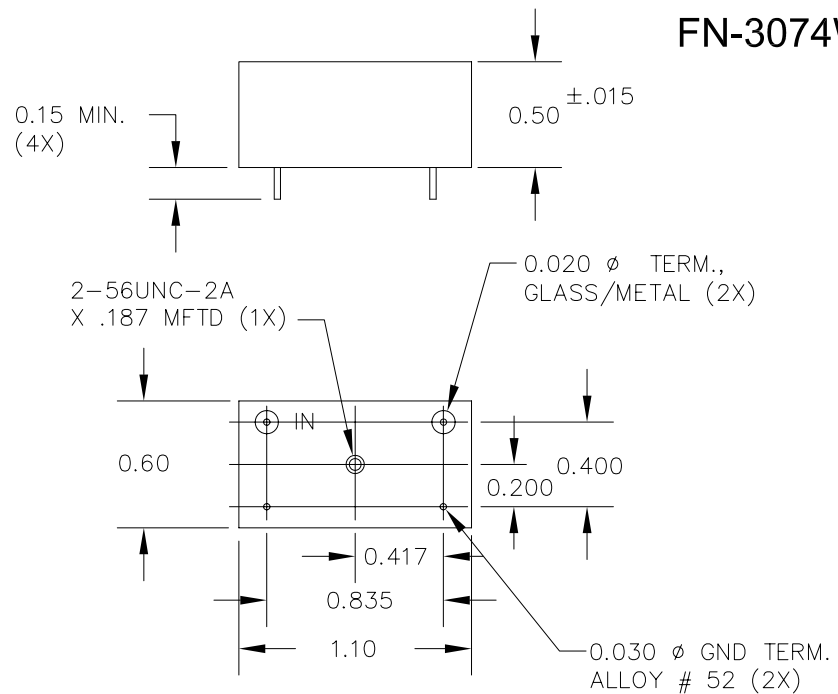

### FN-3074W DRAWING SUMMARY SHEET 2 of 2

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 1/2/08