



**BANDPASS FILTER**

**Fo:** 10.7 MHz  
**3dB BANDWIDTH:** ±1 KHz MIN  
**40 dB BANDWIDTH:** ±20 KHz MAX  
**ULTIMATE ATTENUATION:** 50 dB MIN  
**INSERTION LOSS:** 3.0 dB MAX  
**IMPEDANCE:** 50 OHMS (IN & OUT)  
**RIPPLE:** 0.5 dB MAX  
**OPERATING TEMPERATURE:** 0°C to +50°C


**FN-3114-2W**

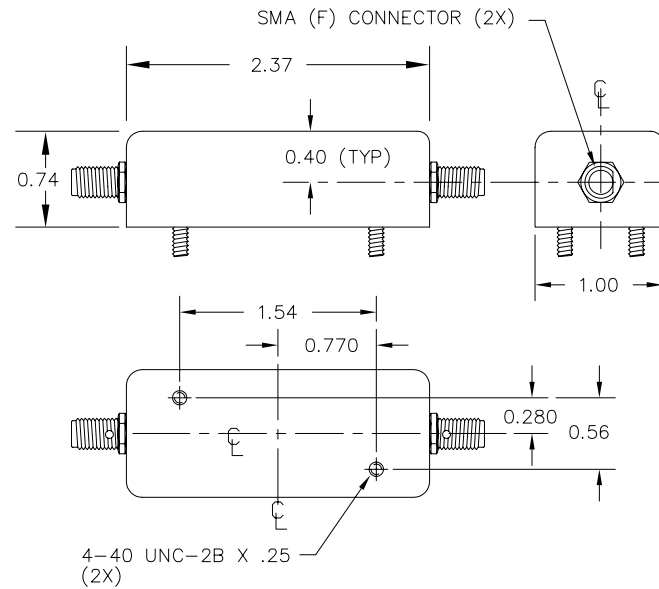


**FN-3114-2WF**

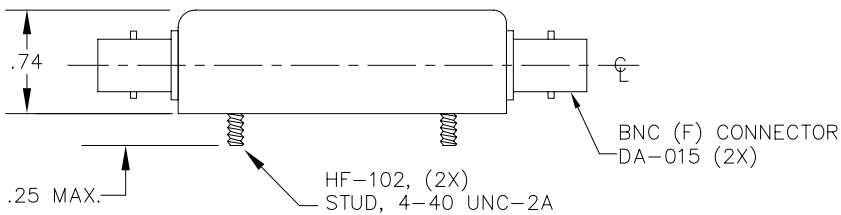

**FN-3114-2WK**

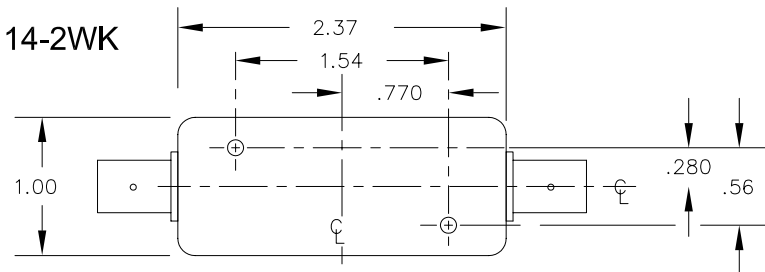

**FN-3114-2WD**

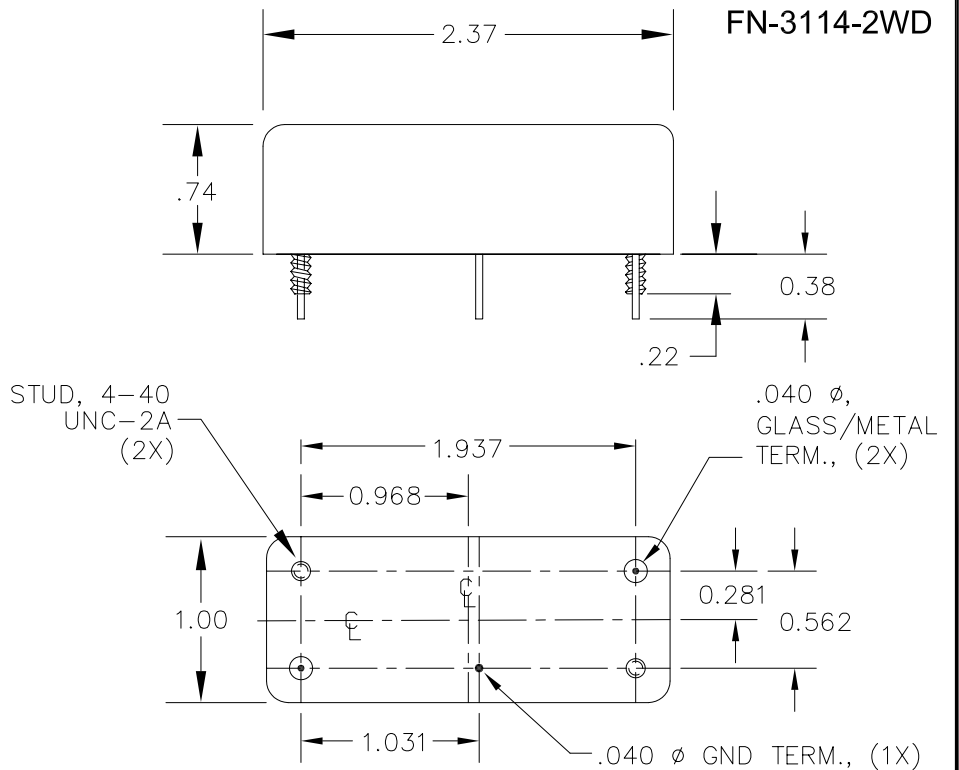

**FN-3114-2W DRAWING SUMMARY**

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 6/14/2004