





BANDPASS FILTER

Fo: 20.0 MHz
 3dB BANDWIDTH: ±1 KHz MIN
 40 dB BANDWIDTH: ±20 KHz MAX
 ULTIMATE ATTENUATION: 50 dB MIN
 INSERTION LOSS: 3.0 dB MAX
 IMPEDANCE: 50 OHMS (IN & OUT)
 RIPPLE: 0.5 dB MAX
 OPERATING TEMPERATURE: 0°C to +50°C

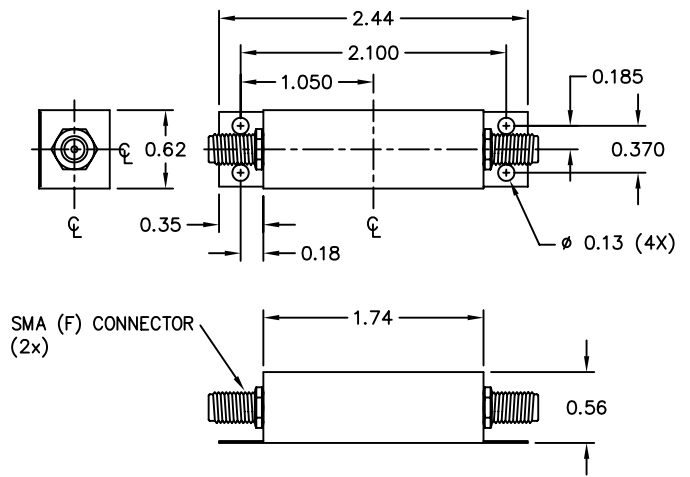

FN-3114-3WT

FN-3114-3WS

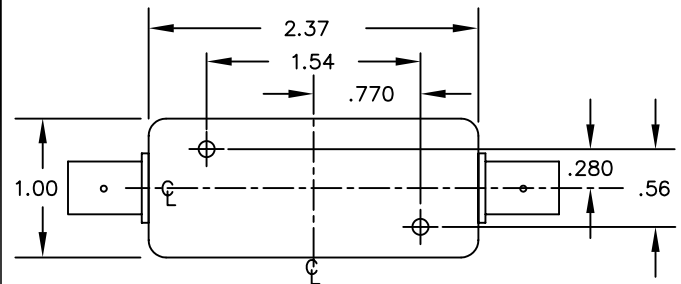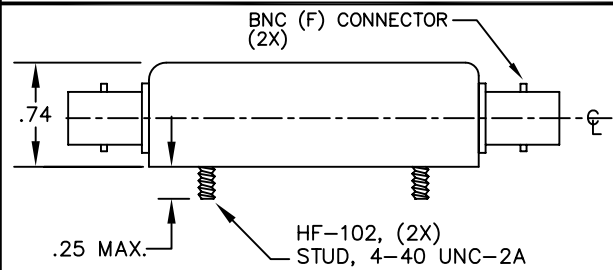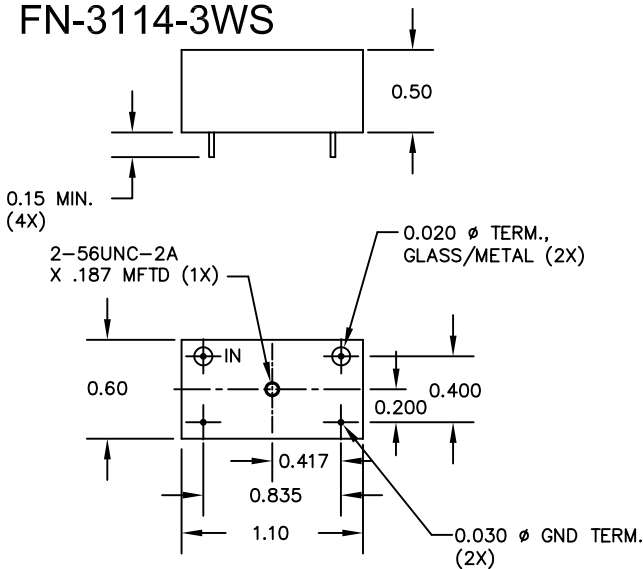

FN-3114-3WK


FN-3114-3W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 06/11/2012 ECO 4379

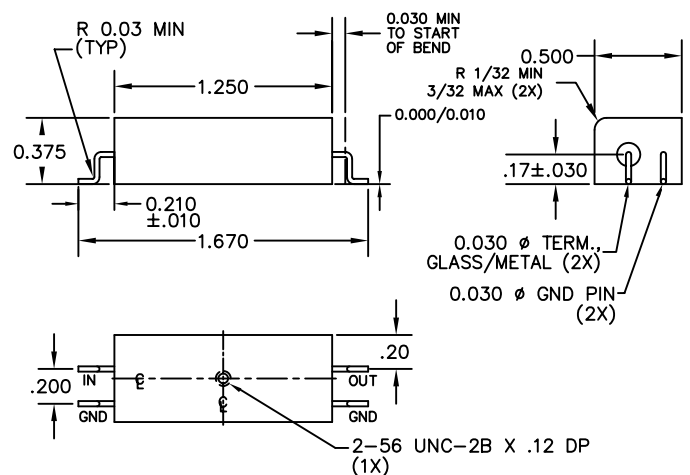

FN-3114-3WEE