





**BANDPASS FILTER**

Fo: 21.4 MHz  
 3dB BANDWIDTH: ±1 KHz MIN  
 40 dB BANDWIDTH: ±20 KHz MAX  
 ULTIMATE ATTENUATION: 50 dB MIN  
 INSERTION LOSS: 3.0 dB MAX  
 IMPEDANCE: 50 OHMS (IN & OUT)  
 RIPPLE: 0.5 dB MAX  
 OPERATING TEMPERATURE: 0°C to +50°C

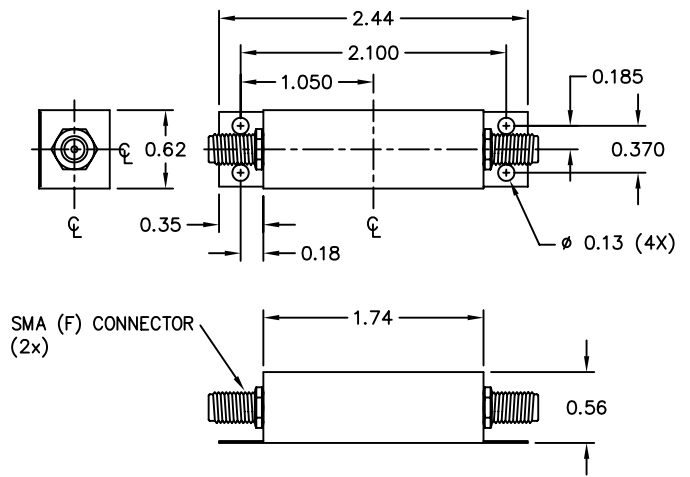

**FN-3114-4WT**

**FN-3114-4WS**

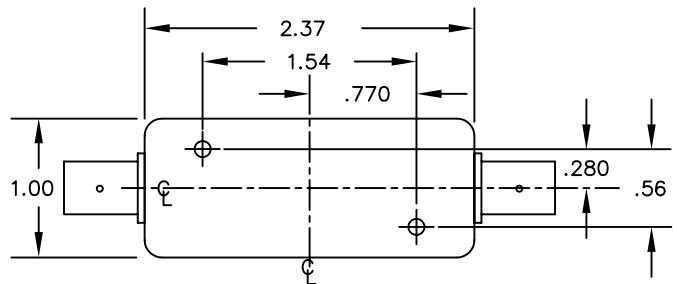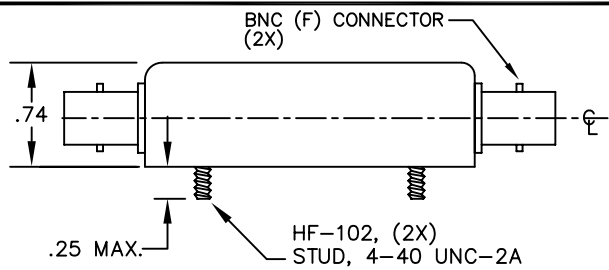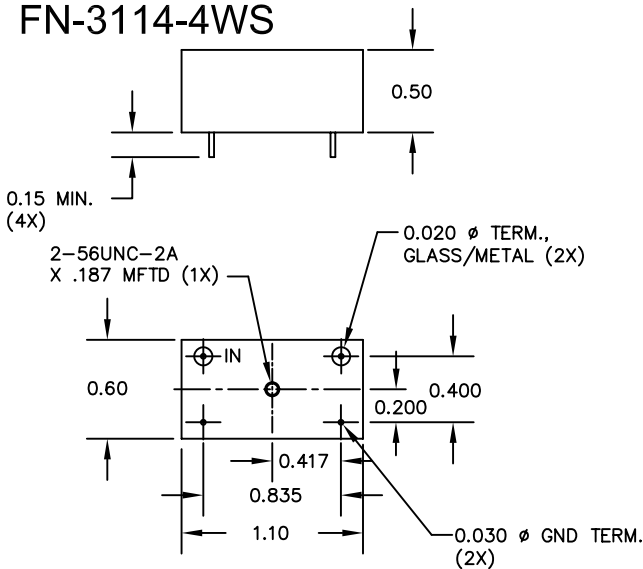

**FN-3114-4WK**


**FN-3114-4W DRAWING SUMMARY**

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 09/07/12

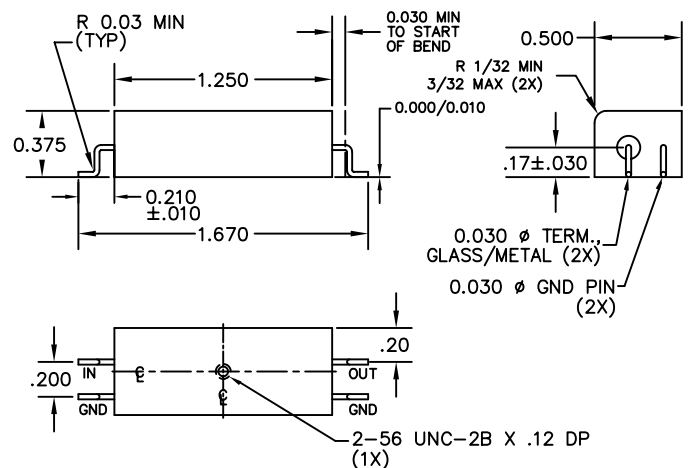

**FN-3114-4WEE**