





BANDPASS FILTER

Fo: 30.0 MHz
 3dB BANDWIDTH: ±1 KHz MIN
 40 dB BANDWIDTH: ±20 KHz MAX
 ULTIMATE ATTENUATION: 50 dB MIN
 INSERTION LOSS: 3.0 dB MAX
 IMPEDANCE: 50 OHMS (IN & OUT)
 RIPPLE: 0.5 dB MAX
 OPERATING TEMPERATURE: 0°C to +50°C

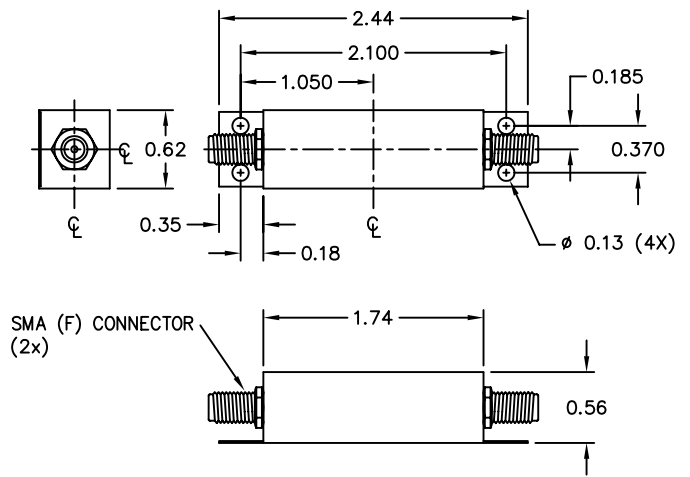

FN-3114-5WT

FN-3114-5WS

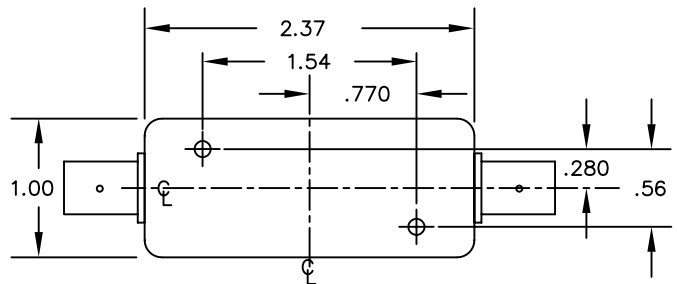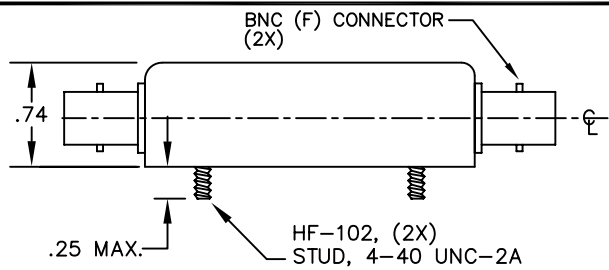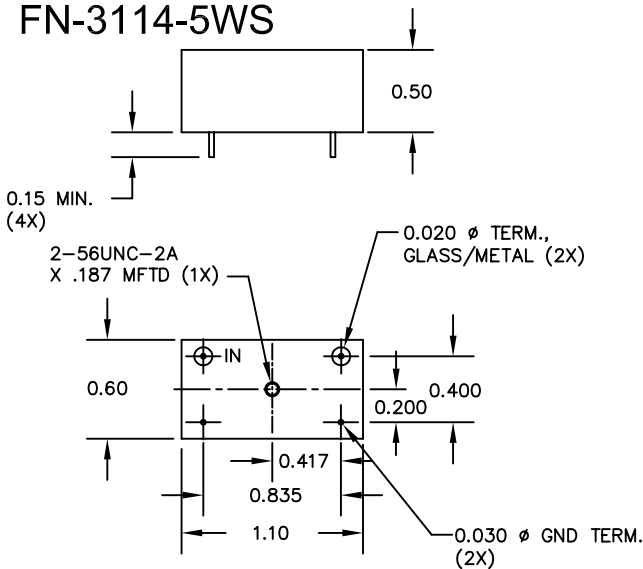

FN-3114-5WK

FN-3114-5W DRAWING SUMMARY


FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 05/29/12 ECO 4379

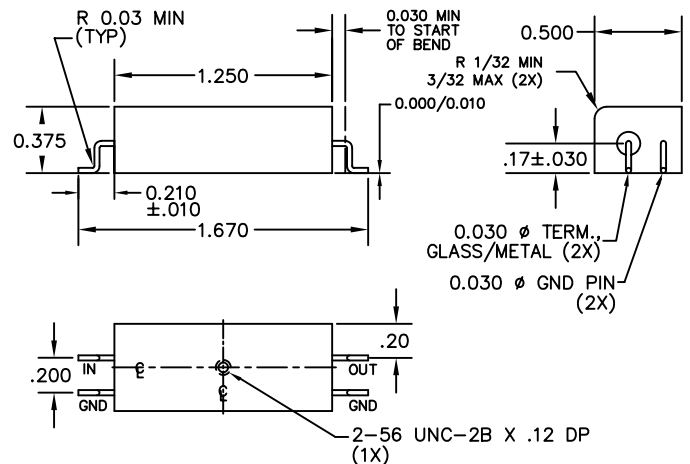

FN-3114-5WEE