



LOW PASS FILTER

Fc: 2.0 KHz
IMPEDANCE : 1000 ohms
INSERTION LOSS: 0.5 dB MAX
RIPPLE: 0.5 dB MAX
1dB CUTOFF: 2 KHz MIN
20dB CUTOFF: 3 KHz MAX
60dB CUTOFF: 3.8 KHz MAX
OPERATING TEMPERATURE : -40°C to +85°C

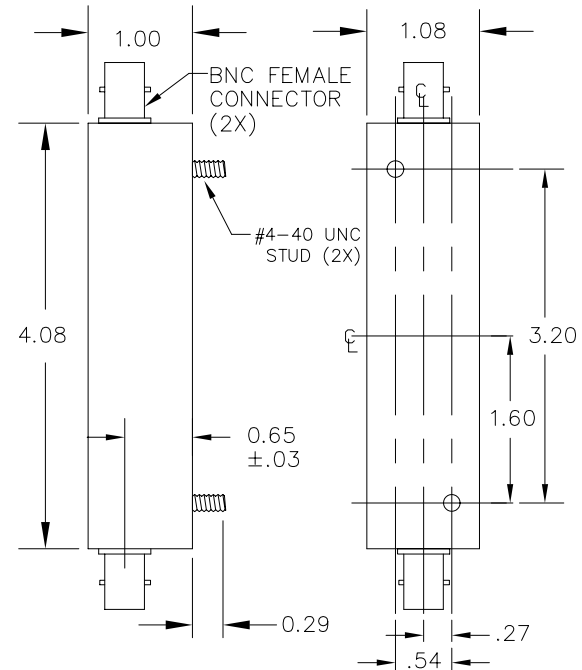

FN-3119W

FN-3119WBB

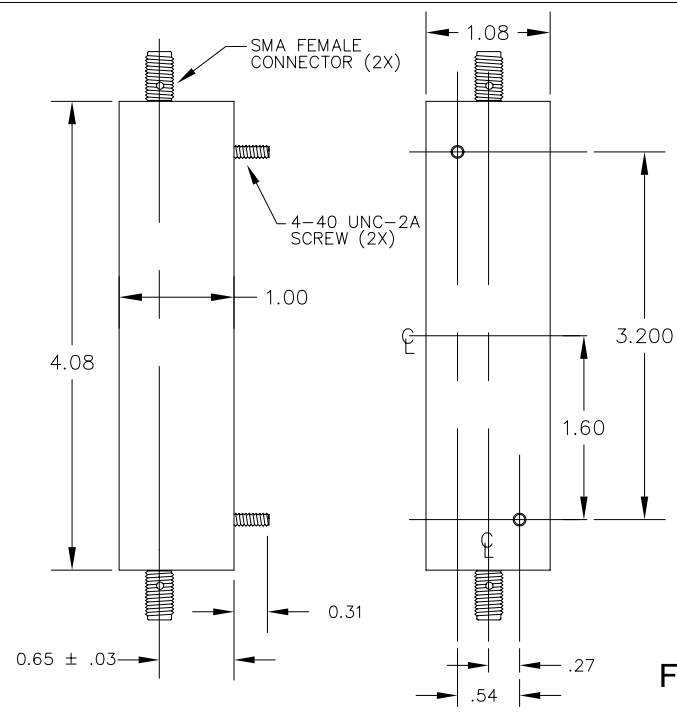

FN-3119W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
ANGLE = ± 1°	HOLES ± .002
.XX = ± .020	
.XXX = ± .010	
REVISED 7/14/03	

FN-3119WX