



STYLE S

Fo: 21.4 MHz
 IMPEDANCE : 50 Ω
 INSERTION LOSS: 10.0 dB Max
 PASS BAND RIPPLE: 1 dB Max ±90 KHz
 3dB BANDWIDTH: 400 KHz Typical
 60dB BANDWIDTH: ±370 KHz Max
 OPERATING TEMPERATURE : -50°C to +85°C

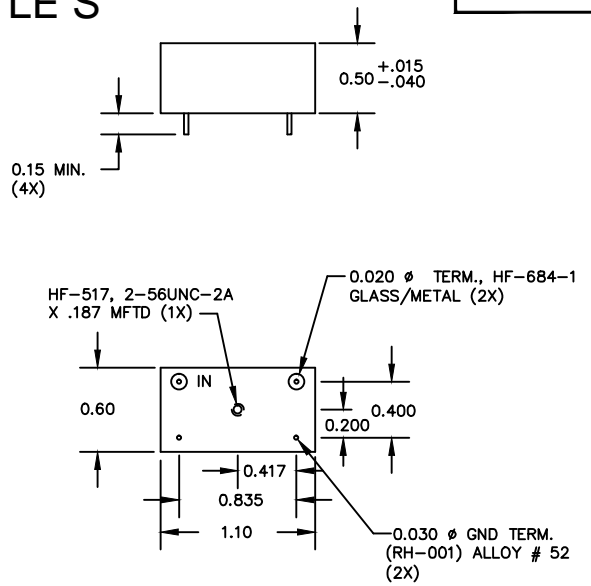

STYLE K

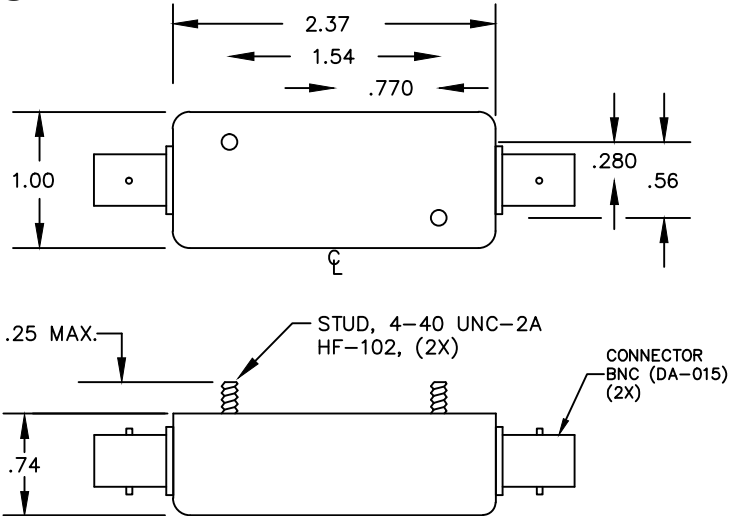

FN-3181W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED