

FN-3228WEE

FILTER TYPE: CRYSTAL BAND PASS FILTER


Fo: 245.76 MHz

IMPEDANCE : 50 OHMS

INSERTION LOSS: 5 dB MAX


3 dBc BANDWIDTH 45 KHz MIN

50 dBc BANDWIDTH 210 KHz MAX


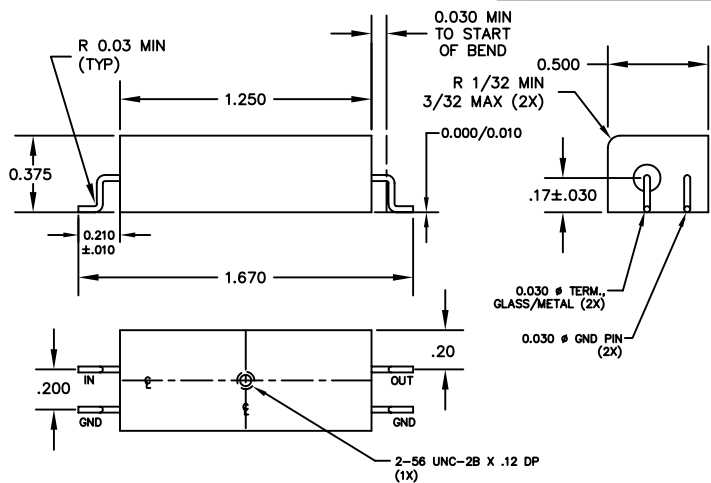


CAN = FA-516
COVER=FB-658

FN-3228WT

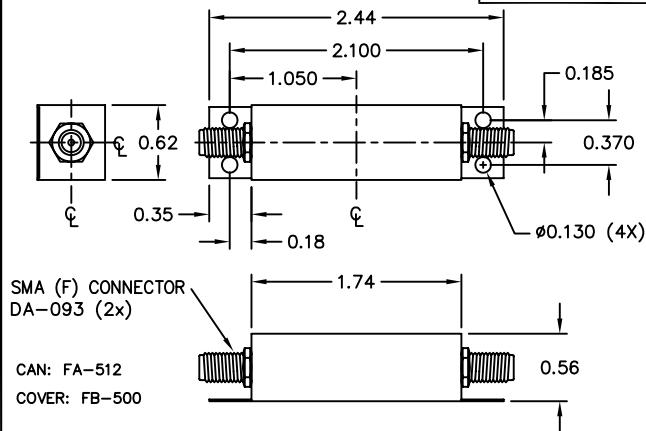

FN-3228WF

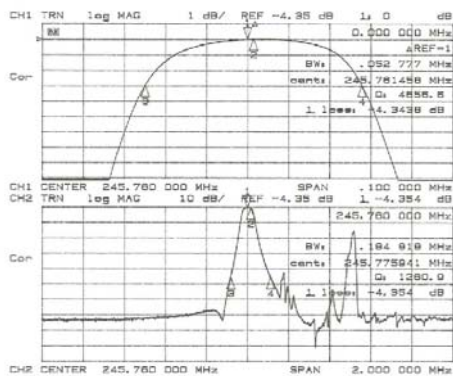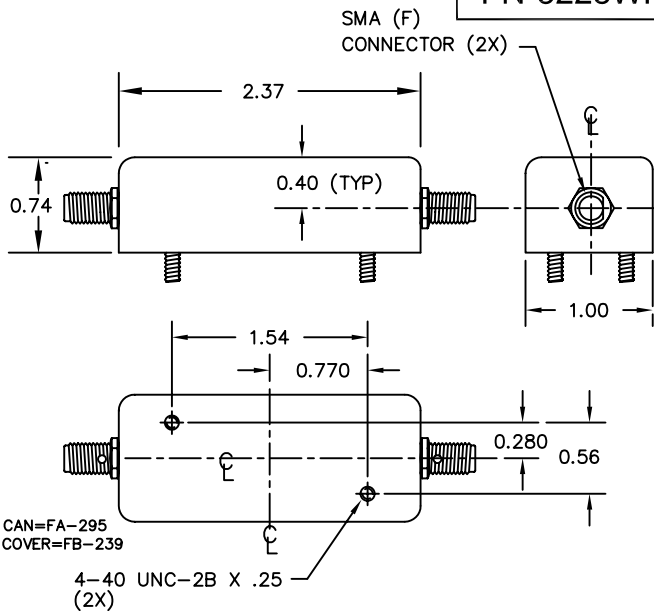

FN-3228W DRAWING SUMMARY

FILTRONETICS, INC.
6010 PARRETTA DR.
KANSAS CITY, MO 64120
816-231-7375
FAX 816-241-0368
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020


ANGLE = ± 1°

.XXX = ± .010

HOLES = ± .002

REVISED 10/12/2012 PER ECO 4423

FN-3228WS

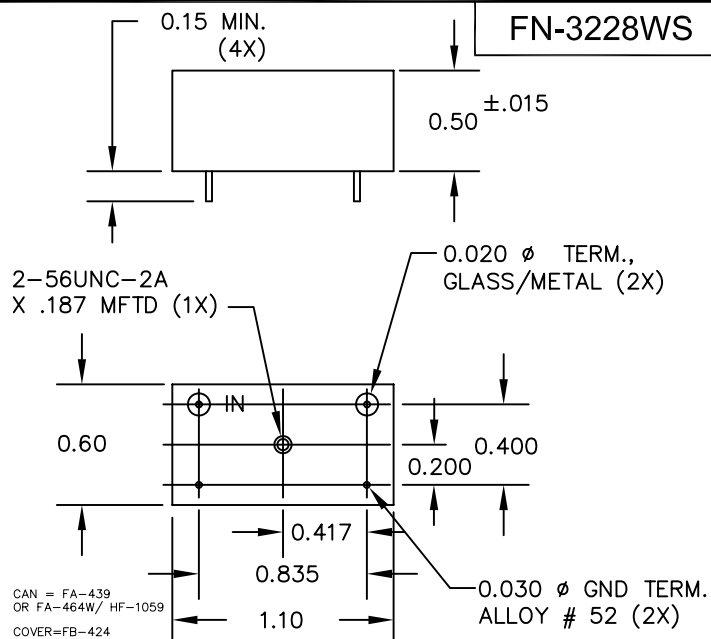

CAN = FA-439
OR FA-464W/ HF-1059
COVER=FB-424