
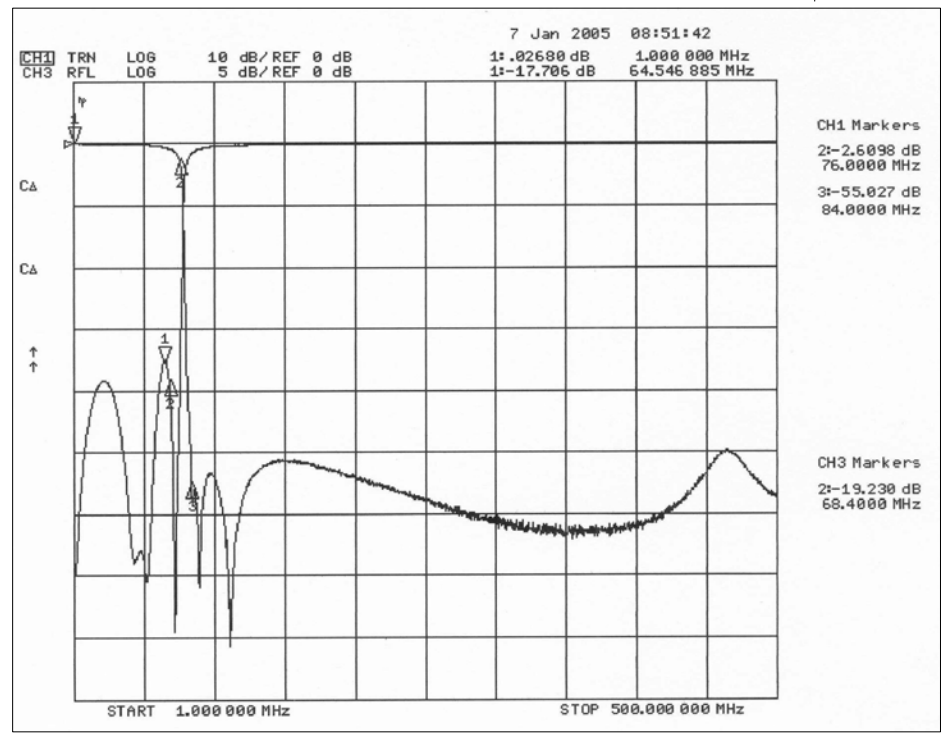


LOWPASS FILTER

3 dB CUTOFF: 76.0 MHz MIN
 45dB MIN STOPBAND: 84 to 500 MHz
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 0.25 dB MAX
 RIPPLE: 0.5 dB MAX
 VSWR to 68.4 MHz: 1.5:1 MAX
 OPERATING TEMPERATURE : -40°C to +85°C

FN-3333WT

FN-3333W

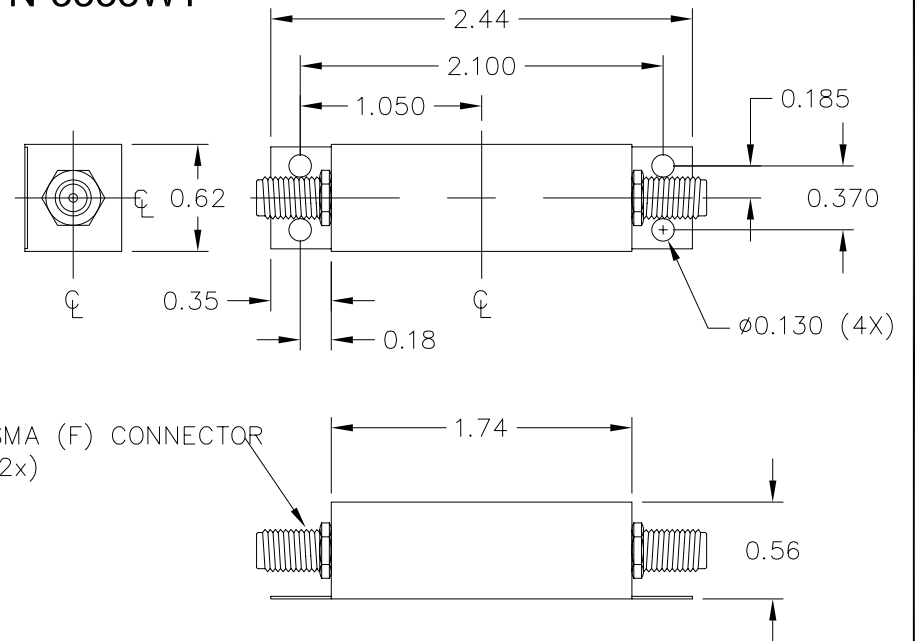

FN-3333W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

| | |
|-----------------------|------------|
| ANGLE = $\pm 1^\circ$ | HOLES |
| .XX = $\pm .020$ | $\pm .002$ |
| .XXX = $\pm .010$ | |

REVISED 1/17/2005