

## LOWPASS FILTER

3 dB CUTOFF: 138.0 MHz MIN

45dB MIN STOPBAND: 152 to 500 MHz

IMPEDANCE : 50 OHMS (IN & OUT)

INSERTION LOSS: 0.25 dB MAX



RIPPLE: 0.5 dB MAX

VSWR to 124.2 MHz: 1.5:1 MAX

OPERATING TEMPERATURE : -40°C to +85°C

## FN-3334WT

FN-3334W

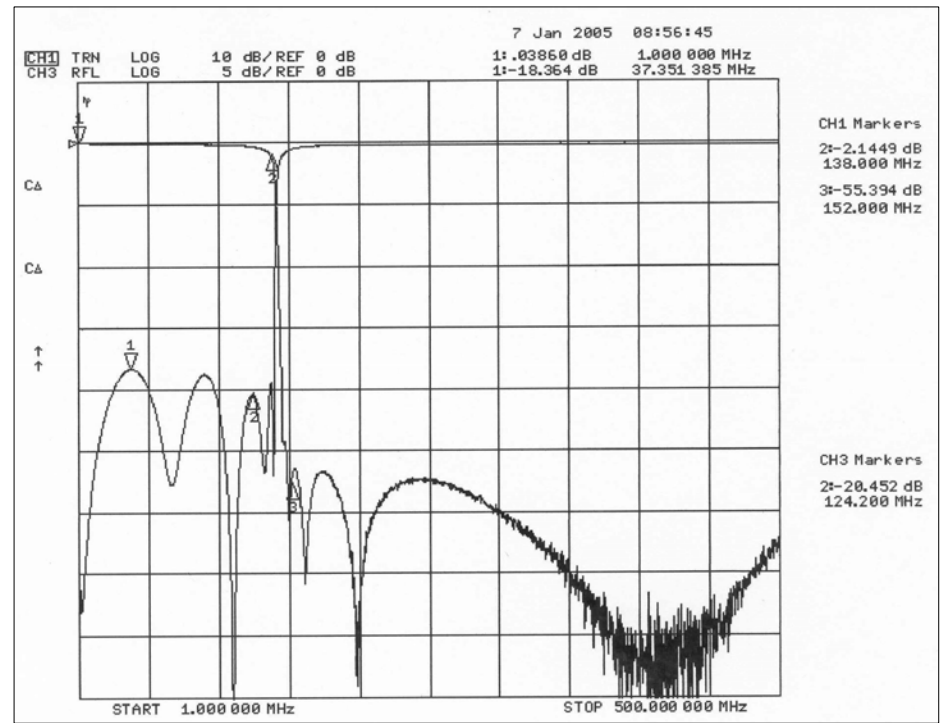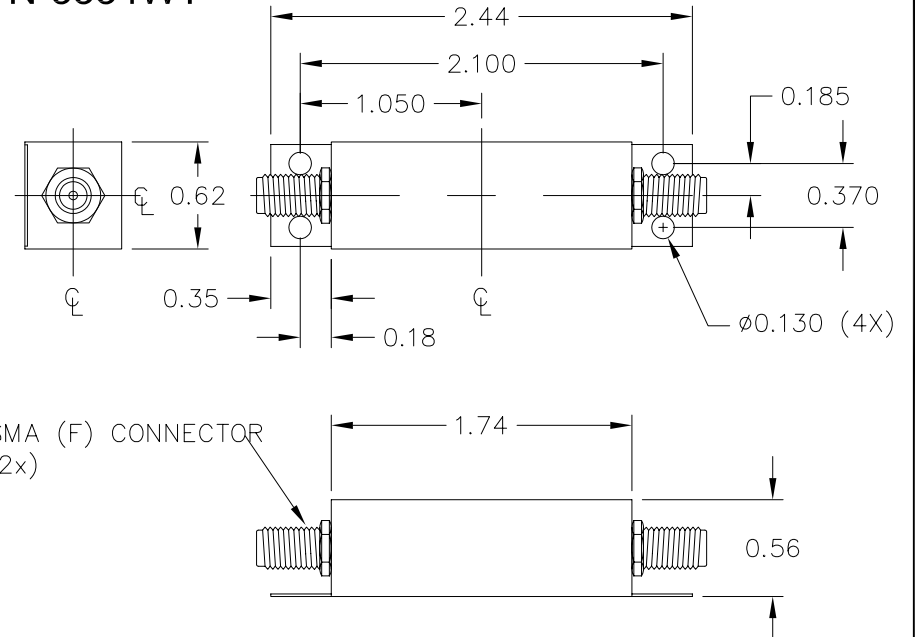

### FN-3334W DRAWING SUMMARY

**FILTRONETICS, INC.**

6010 PARRETTA DR.  
KANSAS CITY, MO 64120  
816-231-7375  
FAX 816-241-0368  
WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE =  $\pm 1^\circ$  HOLES  $\pm .002$   
 .XX =  $\pm .020$   
 .XXX =  $\pm .010$

REVISED 1/17/2005