

# LOWPASS FILTER

3 dB CUTOFF: 453.0 MHz MIN

45dB MIN STOPBAND: 500 MHz to 3 GHz

IMPEDANCE : 50 OHMS (IN & OUT)



INSERTION LOSS: 0.25 dB MAX

RIPPLE: 0.5 dB MAX

VSWR to 407.7 MHz: 1.4:1 MAX

OPERATING TEMPERATURE : -40°C to +85°C

## FN-3336WT

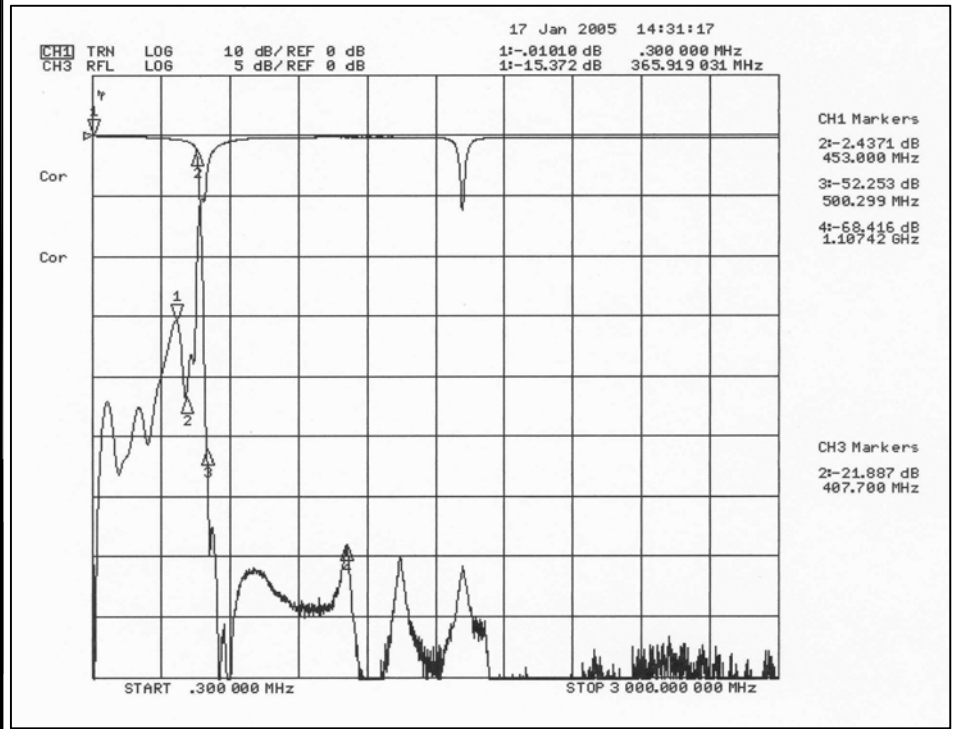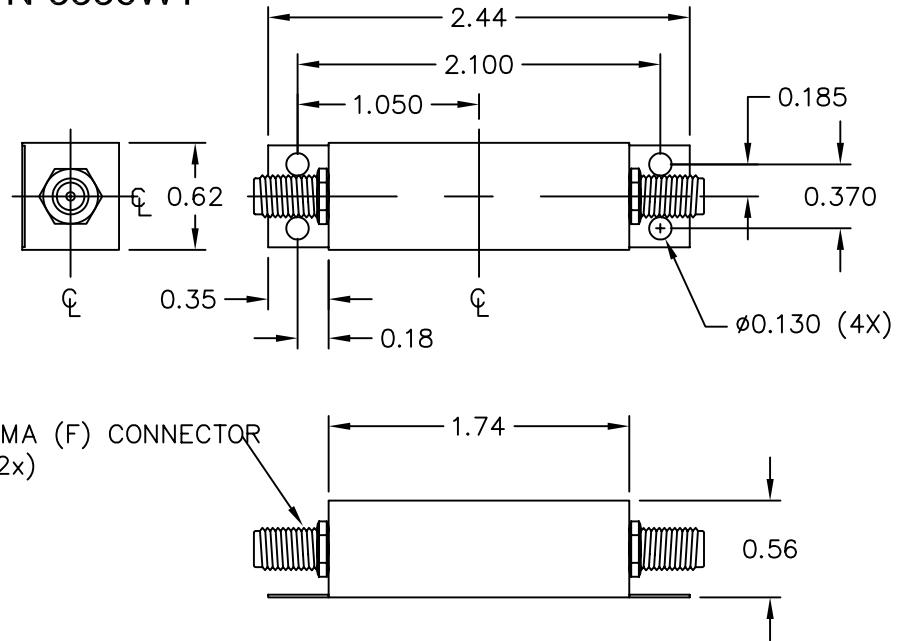

### FN-3336W DRAWING SUMMARY

#### FILTRONETICS, INC.

6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE =  $\pm 1^\circ$   
 .XX =  $\pm .020$   
 .XXX =  $\pm .010$

HOLES  
 $\pm .002$

REVISED 1/17/2005