
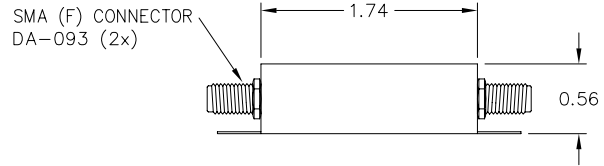



BANDPASS FILTER

Fo: 45.155 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 6.5 dB MAX, 5 dB TYPICAL
RIPPLE: 0.5 dB MAX, 0.1 dB TYPICAL
3dB BANDWIDTH: 60 KHz NOM
60dB BANDWIDTH: 125 KHz MAX
SPURIOUS ATTENUATION: 60 dB MIN
ULTIMATE ATTENUATION: 70 dB
GROUP DELAY VARIATION ±16 KHz:
 5 uSEC MAX, 4 uSEC TYPICAL
OPERATING TEMPERATURE : -40°C to +85°C


FN-3482W

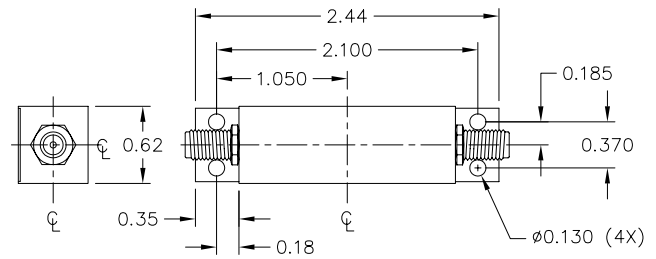

FN-3482WT

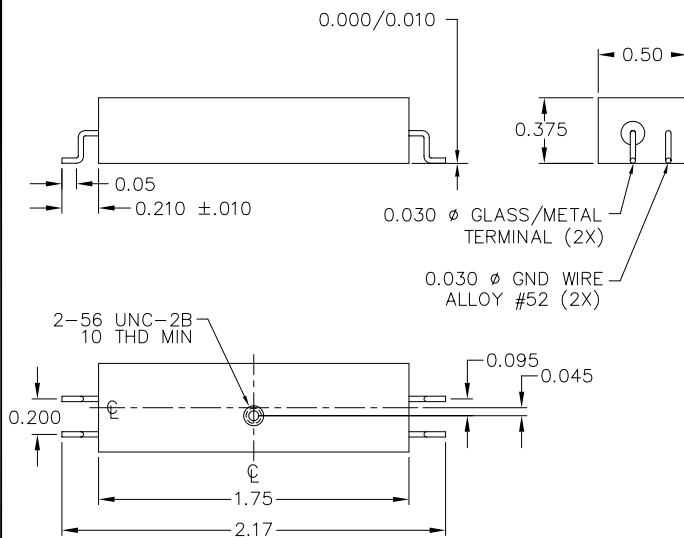

FN-3482FF

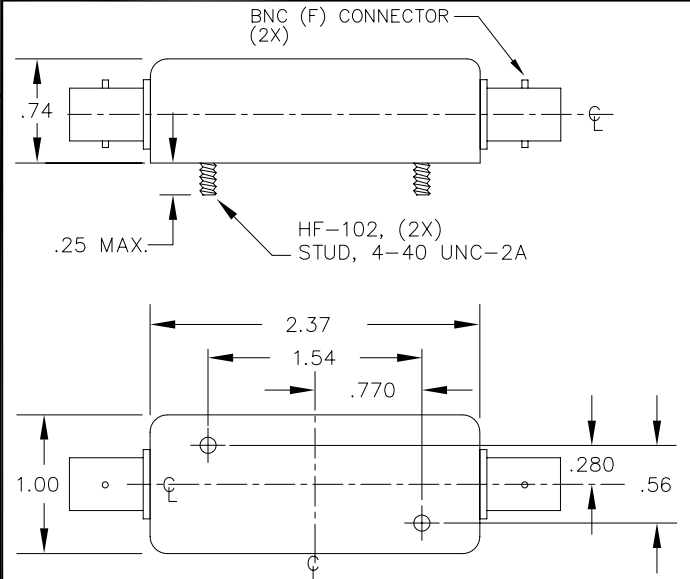

FN-3782WK

FN-3482W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 10/12/05

FN-3482WS

