



BANDPASS FILTER

Fo: 2.8125 MHz
IMPEDANCE : 50 OHM (IN/OUT)
INSERTION LOSS: 2.0 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: 400 KHz MIN NOMINAL
60dB BANDWIDTH: 1.0 MHz MAX, 0.8 MHz TYPICAL
ULTIMATE ATTENUATION: 80 dB TYPICAL UP TO 100 MHz
OPERATING TEMPERATURE : -20°C to +70°C

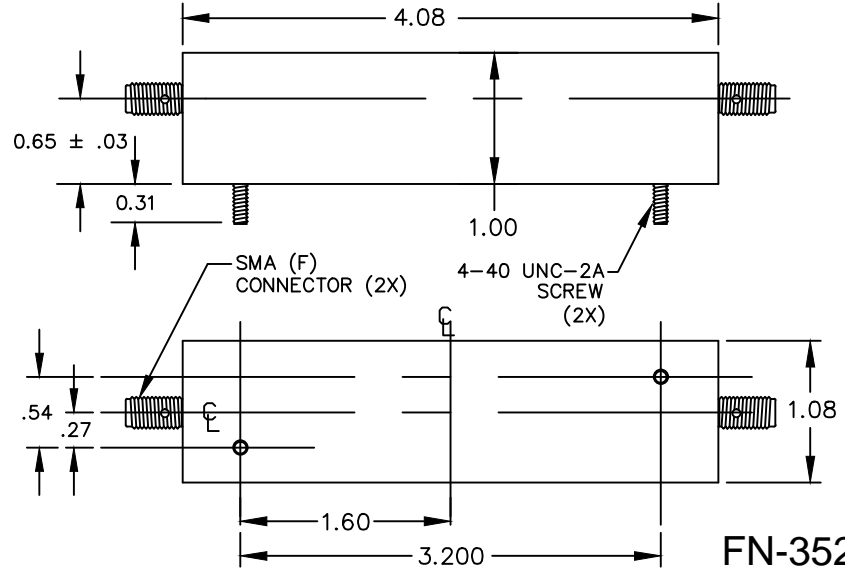


FN-3522WX

OTHER PACKAGE CONFIGURATIONS AVAILABLE, CONSULT FACTORY

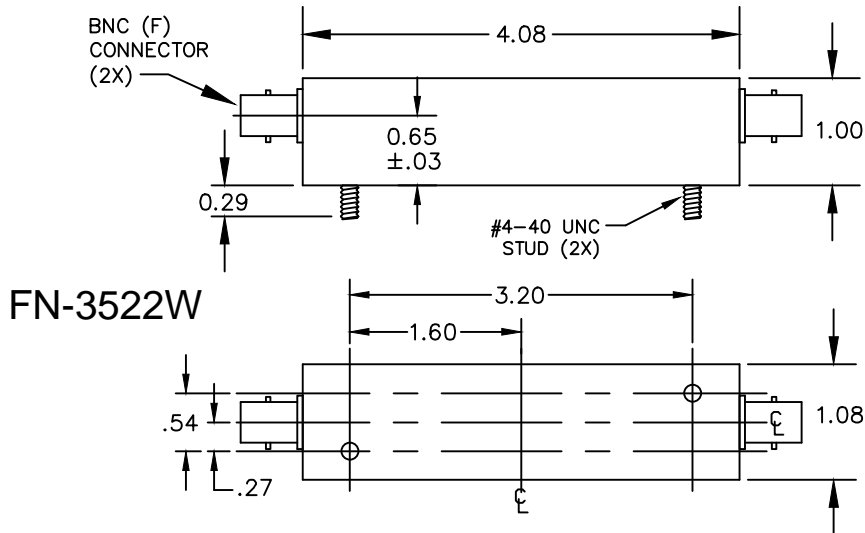

FN-3522W

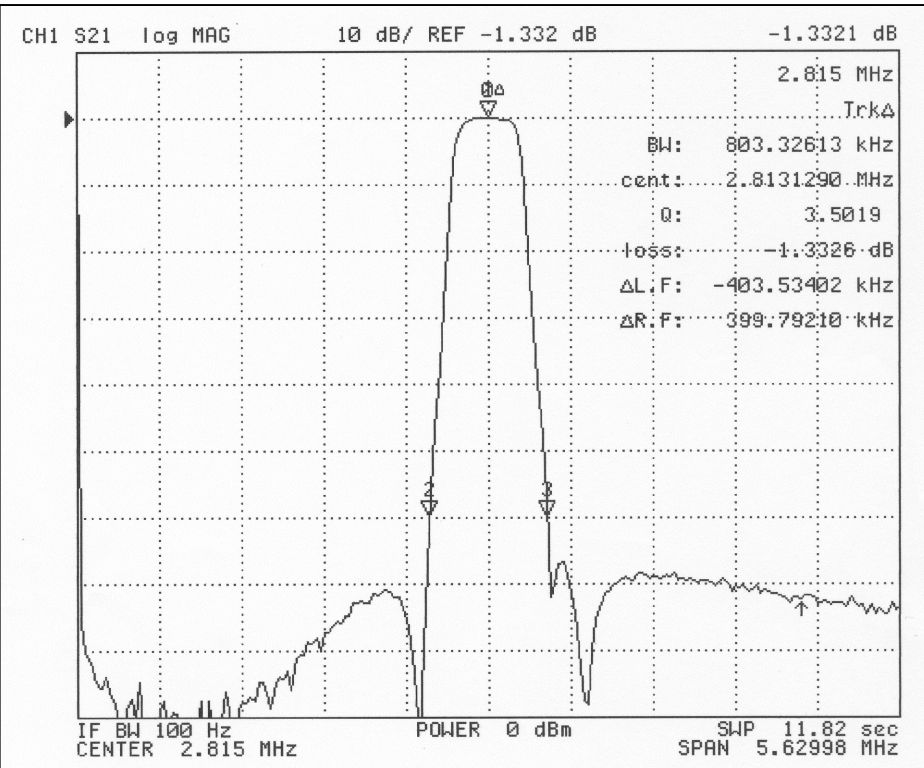

FN-3522W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 10/12/05