



BANDPASS FILTER


Fo: 70.0 MHz
IMPEDANCE : 50 OHMS (IN & OUT)
INSERTION LOSS: 4.5 dB MAX
RIPPLE: 0.5 dB MAX
3dB BANDWIDTH: ±12.5 KHz MIN
 (±14 KHz TYPICAL)
60dB BANDWIDTH: ±40 KHz MAX
ULTIMATE ATTENUATION: 70 dB (Fo ±70 MHz)
OPERATING TEMPERATURE : -40°C to +70°C
STORAGE TEMPERATURE: -55°C to +90°C

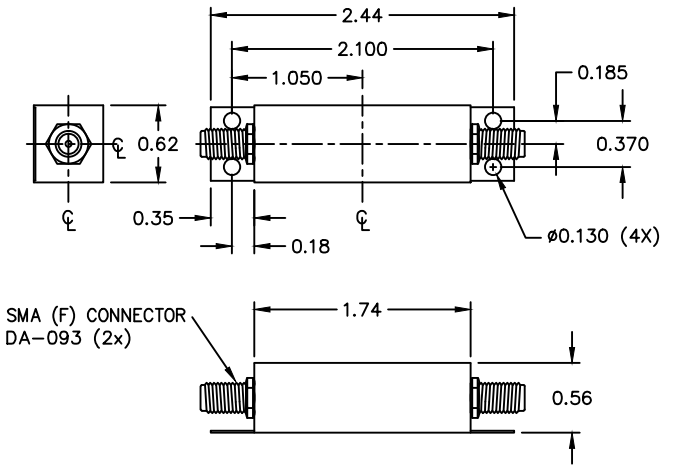


FN-3688WT

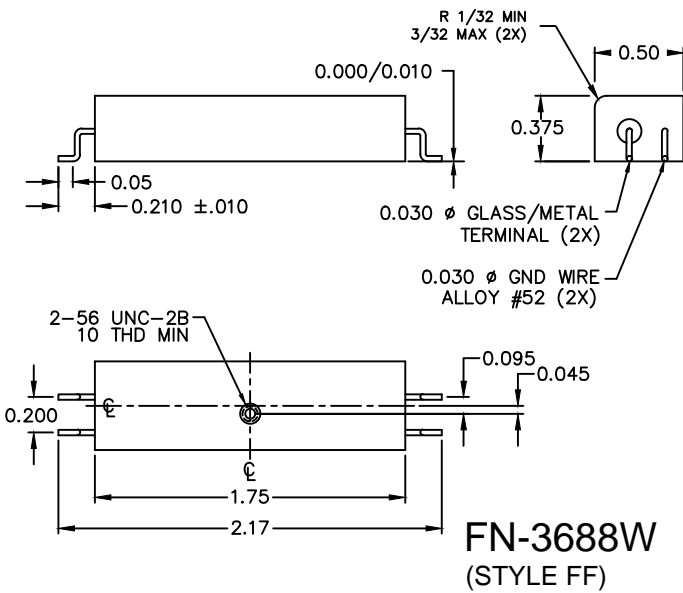

FN-3688W
(STYLE FF)

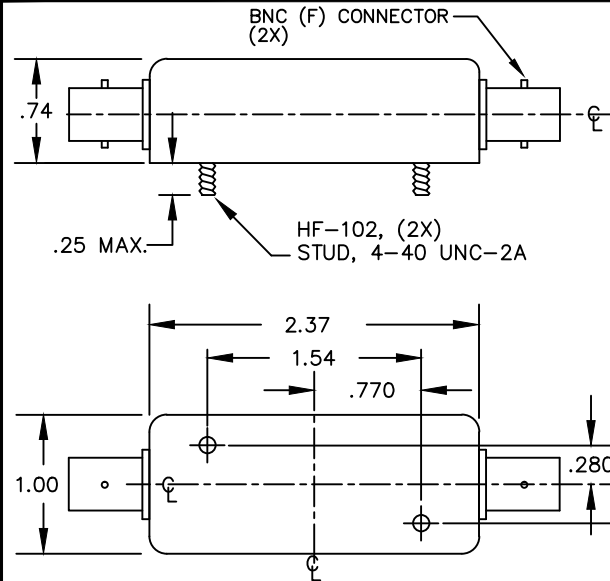

FN-3688WK

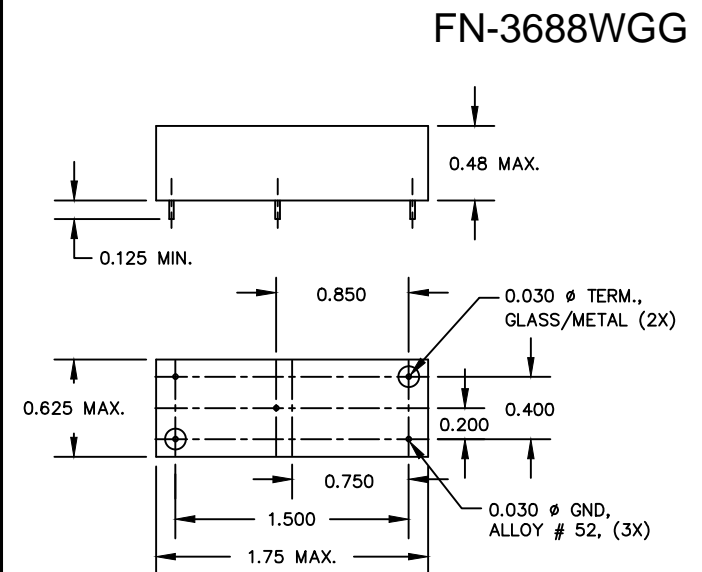

FN-3688WGG

FN-3688W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
 .XXX = ± .010

ANGLE = ± 1°
 HOLES = ± .002

REVISED 02/13/2012 ECO 4363