



LOWPASS FILTER

1 dB CUTOFF: 1120 MHz MIN
 IMPEDANCE : 50 OHMS
 INSERTION LOSS: 0.5 dB MAX
 RIPPLE: 0.5 dB MAX
 40dB STOPBAND: 1760 MHz MAX - See Typical Plot
 OPERATING TEMPERATURE : -40°C to +75°C

FN-3748W

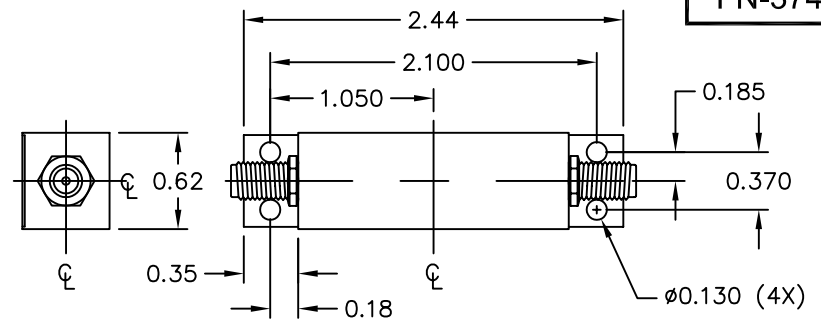


SMA (F) CONNECTOR
 DA-093 (2x)

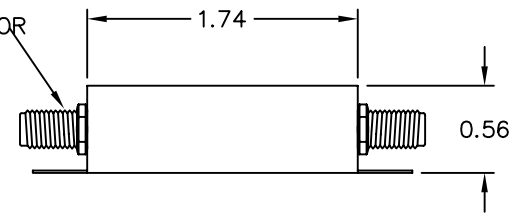

FN-3748WT

FN-3748W

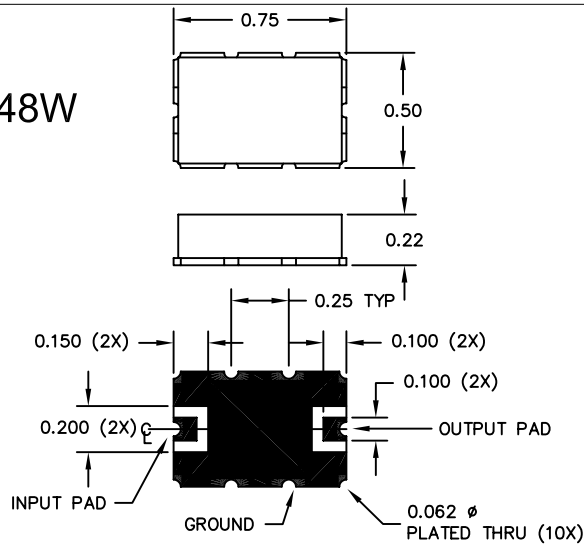

FN-3748W DRAWING SUMMARY

FILTRONETICS, INC.

6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

ANGLE = ± 1°	HOLES
.XX = ± .020	± .002
.XXX = ± .010	

REVISED 12/6/2006

