
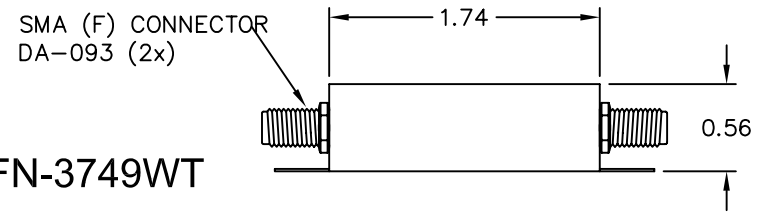


LOWPASS FILTER


1 dB CUTOFF: 1680 MHz MIN
 IMPEDANCE : 50 OHMS
 INSERTION LOSS: 0.5 dB MAX
 RIPPLE: 0.5 dB MAX
 40dB STOPBAND: 2560 MHz MAX - See Typical Plot
 OPERATING TEMPERATURE : -40°C to +75°C

FN-3749W

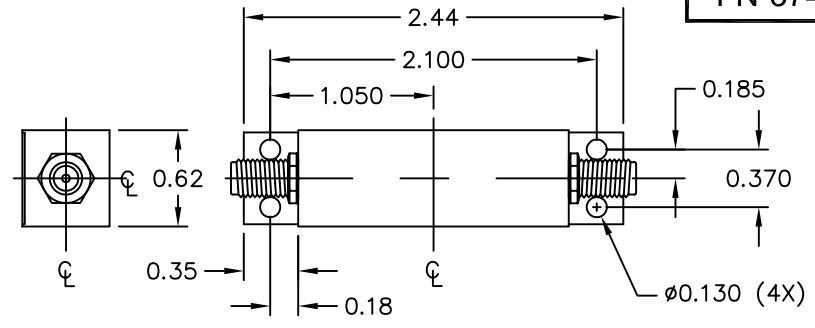

FN-3749WT

FN-3749W

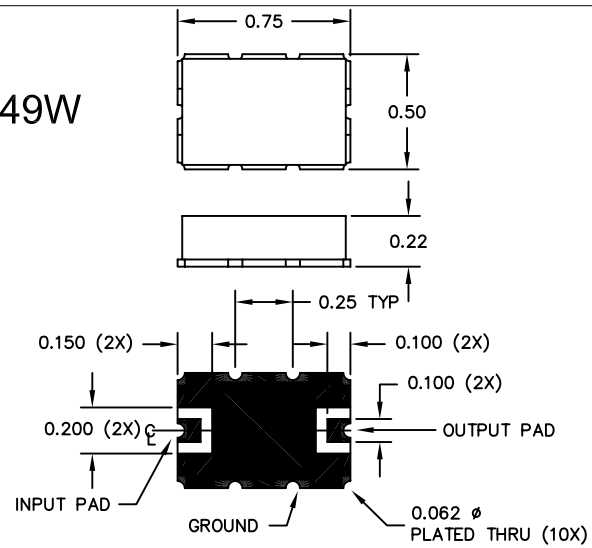

FN-3749W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED
 ANGLE = ± 1°
 .XX = ± .020
 .XXX = ± .010
 HOLES ± .002
 REVISED 12/6/2006

