



COVER / SHIELD : NICKEL SILVER  
 LEADS / BASE : LEAD/TIN  
 MAXIMUM REFLOW TEMP. OF THIS PART : 220°C

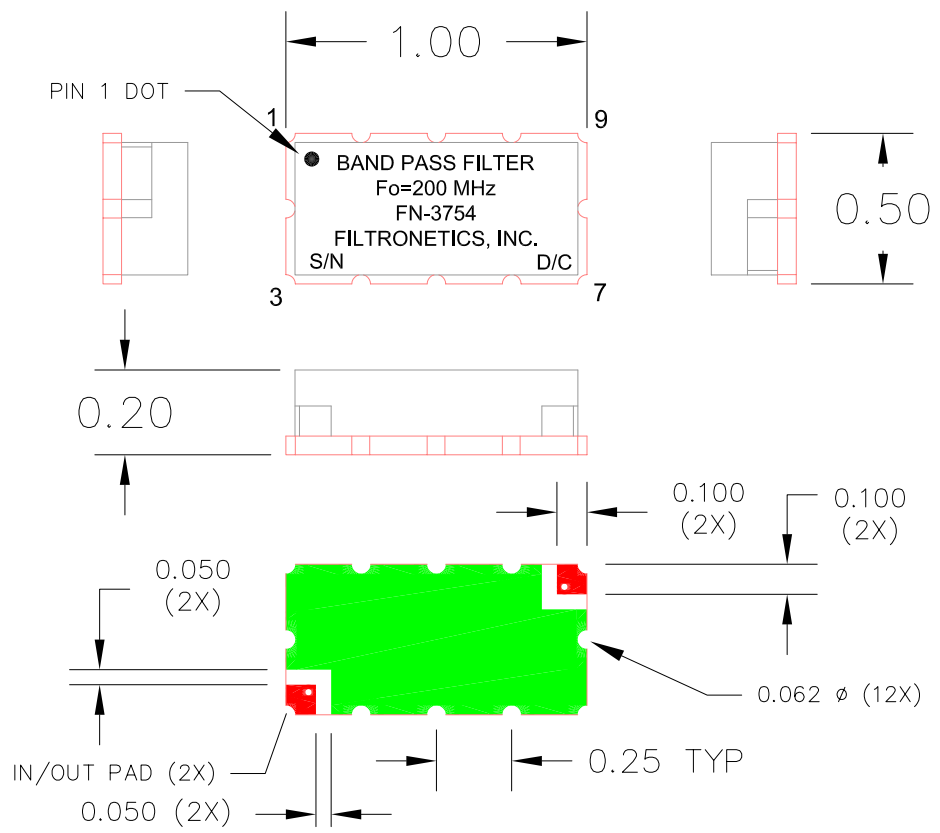

## BANDPASS FILTER

- Fo: 200 MHz
- IMPEDANCE : 50 ohm IN/OUT
- INSERTION LOSS @ Fo: 3.5 dB MAX
- RIPPLE: ±0.5 dB MAX
- 3dB BANDWIDTH: 30 MHz MIN
- 60dB BANDWIDTH: 200 MHz MAX
- ULTIMATE ATTENUATION: 60 dBc MIN  
DC to 100 MHz & 300 to 500 MHz
- OPERATING TEMPERATURE : 0 to +70°C

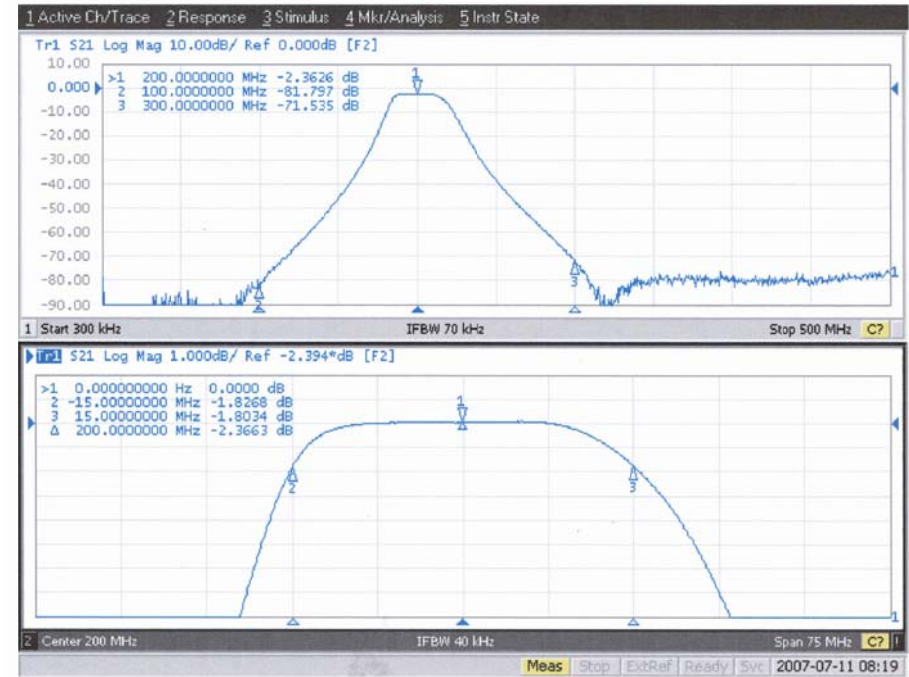

### FN-3754W DRAWING SUMMARY

**FILTRONETICS, INC.**  
 6010 PARRETTA DR.  
 KANSAS CITY, MO 64120  
 816-231-7375  
 FAX 816-241-0368  
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED	
ANGLE = ± 1°	HOLES ± .002
.XX = ± .020	
.XXX = ± .010	
REVISED 8/13/07	