


BANDPASS FILTER


Fo: 255 MHz
IMPEDANCE : 50 OHM (IN/OUT)
INSERTION LOSS: 3.0 dB MAX
RIPPLE: 1.0 dB MAX
1dB BANDWIDTH: 30 MHz MIN
60dB BANDWIDTH: 265 MHz MAX
OPERATING TEMPERATURE : -40°C to +85°C

FN-3775W

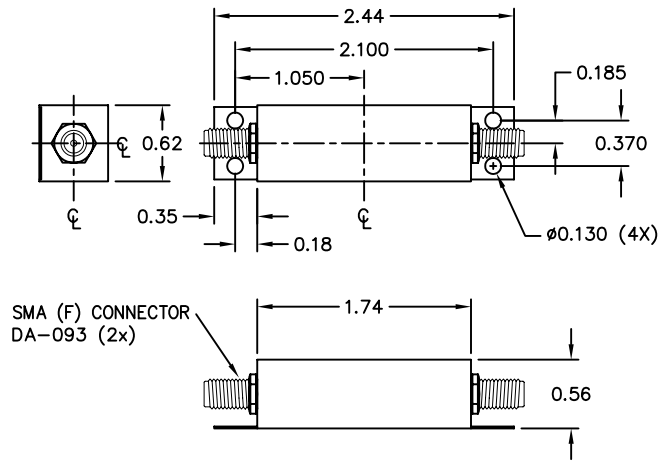

FN-3775WT

FN-3775W

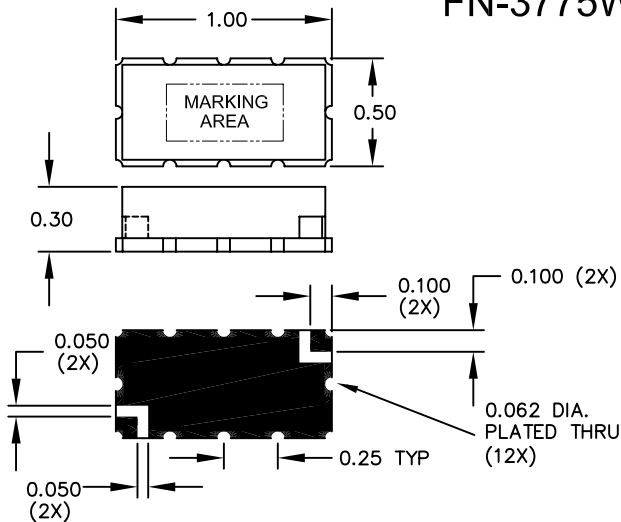

FN-3775W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020
.XXX = ± .010

ANGLE = ± 1°
HOLES = ± .002

REVISED 1/15/2007

