
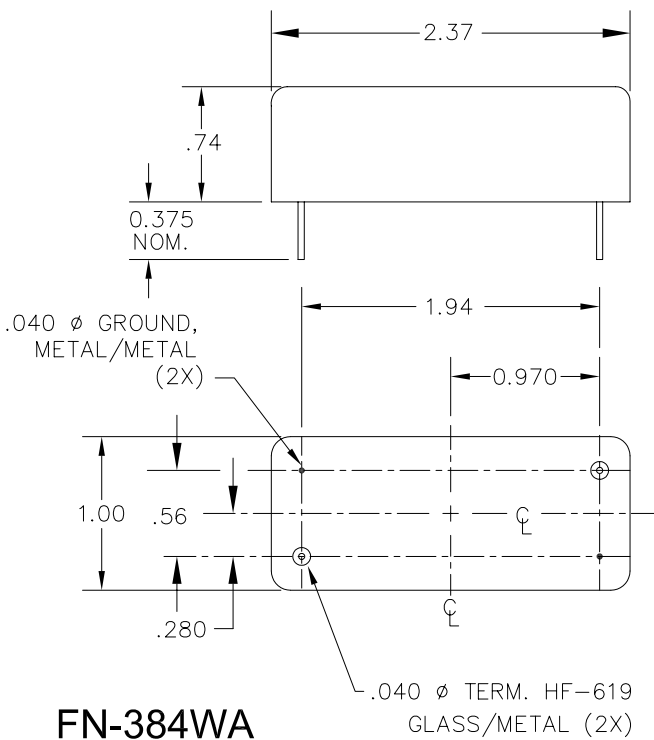



BANDPASS FILTER

Fo: 10.7 MHz
 IMPEDANCE : 50 OHMS (IN & OUT)
 INSERTION LOSS: 8.0 dB MAX
 RIPPLE: 0.1 dB MAX
 3dB BANDWIDTH: 200 KHz MIN
 60dB BANDWIDTH: 1 MHz MAX
 OPERATING TEMPERATURE : 0°C to +50°C


FN-384W

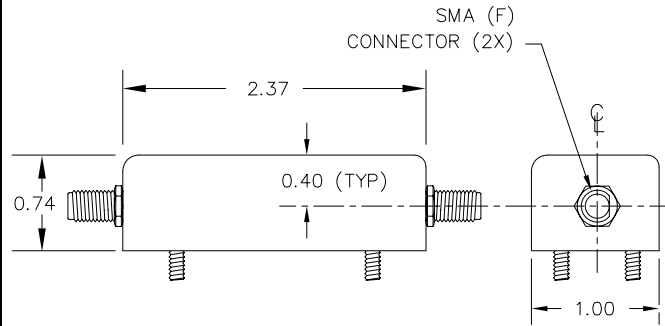

FN-384WA

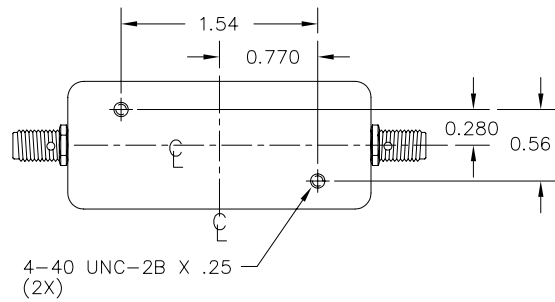

FN-384WF

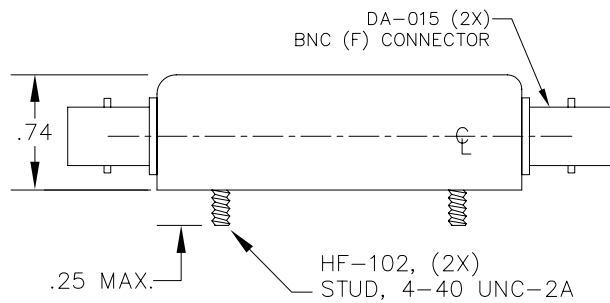

FN-384WK

FN-384W DRAWING SUMMARY

FILTRONETICS, INC.
 6010 PARRETTA DR.
 KANSAS CITY, MO 64120
 816-231-7375
 FAX 816-241-0368
 WWW.FILTRO.NET

TOLERANCES UNLESS NOTED

.XX = ± .020	ANGLE = ± 1°
.XXX = ± .010	HOLES = ± .002

REVISED 8/18/03